广东凤铝铝业有限公司

三水基地：广东省佛山市三水河口民营开发区
电话：0757-8767 6728 / 8767 6738 / 8767 6758 / 8767 6708
传真：0757-8767 6718

Sanshui Base Address: Hekou Development Zone,Sanshui,Foshan ,Guangdong,China,528133
Nanhai Base Address:Fengchi Industrial Zone,Dali Town,Nanhai,Foshan ,Guangdong,China,528231

凤铝微信公众号

凤铝门窗

凤铝好品质　中国好门窗



FENGLU

windows & doors product manual

凤铝门窗产品手册

凤铝门窗 大品牌 更放心

中国铝型材行业领航者

CHINA ALUMINIUM INDUSTRY LEADER

世界500强战略合作伙伴

产、学、研、用产业链完整

Strategic partner of the word's
top 500 enterprises
Perfect industry-college-institute
cooperation system



凤铝门窗 大品牌 更放心

以品质助力家居消费升级

PROMOTE HOME CONSUMPTION UPGRADE WITH QUALITY

凤铝门窗标配凤铝铝材，采用原厂穿条、品牌五金，每一个细节都做到了精益求精。

产品广泛应用于别墅、海景房、复式楼房的装修。

Fenglu Doors and Windows is standard equipped with Fenglu aluminium profile,

using the the original insulation strip and brand hardware, every detail has achieved excellence.

Products are widely used in the decoration of the villa, sea view room and duplex building .



凤铝门窗 大品牌 更放心

品牌之路 不变初心

CHANGELESS CHASING BRAND ROAD



简介 COMPANY PROFILE

凤铝门窗是凤铝铝业针对家装市场推出的高品质门窗品牌，产品标配凤铝铝材，强度、韧性、抗氧化性能一流，产品采用原厂穿条、品牌五金，每一个细节都做到了精益求精。满足了人们对门窗产品环保、时尚、耐用、安全的高品质需求，环保、时尚、耐用。

凤铝门窗注重结构与细节的搭配，并根据不同区域需求，进行定制化产品配置。产品做到了框扇齐平、隐藏排水，整体设计简约、大方，产品的质感、质量、水密、气密、抗风压性能均达到行业较高水平。产品涵盖平开、推拉门窗，重型门、折叠门、阳光房等各系列门窗产品。

凤铝门窗注重年轻消费群体的消费体验，紧跟消费需求，打通了线上选品，线下体验、成交的完整销售服务链，以天猫旗舰店为载体，凤铝门窗为消费者提供从线上下单到线下量尺、安装、售后等一系列服务，体现了凤铝品牌的年轻与现代。

凤铝门窗立足于对航天品质的卓越追求，轻量化效果显著。产品具有隔音、隔热、耐候性强、智能、安全等突出特点。凭借对提升工艺的孜孜追求，凤铝门窗不仅征服了消费者的心，还荣获“系统门窗十佳品牌”、“消费者信赖品牌”、“中国家居制造500强（系统门窗行业）”等荣誉，在一众门窗品牌中独领风骚。

凤铝铝业成立于1990年，是集铝合金型材产品研发、生产与销售为一体的综合型大型企业，是中国铝型材行业的领军企业，央视“民族品牌 荟萃闪耀”栏目优选品牌，工信部“制造业单项冠军示范企业”，国家“高新技术企业”。凤铝三水基地占地总面积90万平方米，主要研发与生产建筑铝型材、工业材、系统门窗及航空航天、军工类等特种铝合金产品。

Fenglu Doors and Windows , is the high-quality doors and windows brand launched by Fenglu Aluminium for the home decoration market. Its products are standard equipped with Fenglu aluminum profiles which strength, toughness and oxidation resistance are the first-class, using the the original insulation strip and brand hardware, every detail has achieved excellence. It is environmentally friendly, fashionand durable，meet the people's environmental friendly, fashion, durable, safe and high-quality demand for doors and windows products.

Fenglu Aluminium Doors and Windows pay attention to the collocation of structure and details, and acustomized product configuration according to different regional needs. The product achieves the flush on frame and sash, hidden drainage, the overall design is simple and generous. The product texture, quality, water density, air tightness, wind and pressure resistance performance have reached a high level in the industry. Products cover casement, sliding doors and windows, heavy doors, folding doors, sun room and other series of doors and windows products.

Fenglu Aluminium Doors and Windows pay attention to the consumption experience of young consumer groups, follow consumer demand, open up the sales service chain through the online selection, offline experience and closing the deal. With Tmall flagship store as the carrier, Fenglu Aluminum Doors and Windows provides consumers from online order to offline ruler, installation, after-sales and a series of services, embodies its young and modern.

Fenglu Aluminum Doors and Windows is based on the pursuit of excellence in aerospace quality, its lightweight effect is significant. Products have sound insulation, heat insulation, strong weatherability, intelligence, safety and other outstanding characteristics. Relying on the diligent pursuit of technology improvment, Fenglu Aluminium Doors and Windows not only conquered the heart of consumers, but also won the "system door and window top ten brand", "consumer trust brand", "China home manufacturing top 500 (system door and window industry)" and other honor, stands out among of the many windows and doors brands.

Fenglu Aluminium was founded in 1990, is an integrated large enterprise of aluminum alloy profile product research and development, production and sales, is the Chinese aluminum profile industry leader, CCTV "national brand gathering shine" column preferred brand, the ministry "manufacturing individual champion demonstration enterprise", the national high-tech enterprise. Feng Aluminium Sanshui base covers an area of a total area of 900,000 m^2, mainly research and development and production of construction aluminum profiles, industrial profiles, system doors and windows, aerospace, military and other special aluminum alloy products.

文化理念
CULTURAL IDEA

企业文化

专：专注于铝合金研发和制造
　　在产业领域内做深做细，在产业规模与品牌上做强做大；
优：品质优秀是凤铝屹立不倒的根基；
快：满足市场需求快、生产交货快是凤铝最突出的特色；
严：管理规范是企业健康、持续发展的根本保障。

Enterprise culture
Professional: Focus on R&D and manufacturing of aluminum alloy by setting foothold in the field and strengthening industry scale and brand image;
Excellence: The excellent quality of Fenglu is the foundation of long lasting in the market.
Fast: Meeting market demands and quick delivery is the key feature of Fenglu;
Strict: The norm management is fundamental to a corporation's healthy & steady development.

企业经营理念

品质理念：质量是凤铝价值和尊严的起点；
研发理念：市场需求是凤铝研发的根本方向和指针；
制造理念：追求产业专业化和产品多元化；
人才理念：人才是企业发展的核心竞争力。

Business principle
Quality: Quality is the starting point of Fenglu's value and honor,
R&D: Market demand directs R&D;
Manufacturing: Striving for industry professionalism and products diversification
HR concepts: Human resources is the core competitiveness of enterprise development.

企业愿景

继续引领中国铝型材行业发展
成为全球有影响力的铝合金产品研发、制造与服务商
成为世界上极具竞争力和被社会公认的卓越品牌企业

Enterprise Vision
Our vision is to become a leading brand in China's aluminum industry, a professional developer and service provider with global influence,and an outstanding brand with high competitiveness and social recognition.

企业核心价值观

诚信：企业立足之本　　创新：企业发展之源
责任：企业修身之德　　共赢：企业生存之道

The core values of the enterprise
INTEGRITY: the foothold of the enterprise
INNOVATION: the developing source of the enterprise
RESPONSIBILITY: the moral request of the enterprise
WIN-WIN: the rules of surviving in business



企业荣誉
ENTERPRISE HONOR

历经30多年的发展，凤铝先后荣获“中国建筑铝型材行业排名第一”、“中国制造业单项冠军企业”、“国家认可实验室”、“国家级技术中心”等众多荣誉，成为中国建筑铝型材行业的龙头企业和行业标杆。

After developing more than 30 years, Fenglu awarded China Top Brand, Famous Trademark of China, Ranking First of China Building Aluminium Profile, Single Item Champion of China Manufacturing Industry, National Technology Center, National Recognized Testing Laboratory and so on which makes Fenglu become leading enterprise and industry benchmark of building aluminium profile industry.


广东凤铝铝业有限公司
2017年（第三届）中国建筑铝型材十强企业
第一名
中国有色金属加工工业协会
2017年12月29日


证 书
广东凤铝铝业有限公司：
中国工业铝挤压材十强企业
中国有色金属加工工业协会
二〇一三年九月二十日


证 书
兹授予
广东凤铝铝业有限公司生产的铝材为
中国航天专用铝材
SPECIAL ALUMINUM FOR CHINA SPACE
特发此证
中国航天基金会
二〇〇五年九月



凤铝铝业
FENGLU ALUMINIUM


编号：07-098-07-397
中国名牌产品证书
根据中国名牌战略推进委员会评价结果，特
授予 广东凤铝铝业有限公司 生产的
凤铝 FENGLU 牌建筑用铝合金型材为：
中国名牌产品
有效期：二〇〇七年九月至二〇二〇年九月
国家质量监督检验检疫总局
二〇〇七年九月


证 书
制造业单项冠军示范企业
（2018年 — 2020年）
企业名称：佛山市三水凤铝铝业有限公司
主营产品：铝合金建筑型材
中国工业经济联合会
2018年12月14日


中国驰名商标
凤铝®
FENGLU
中华人民共和国国家工商行政管理总局
二00八年四月


高新技术企业
证书
企业名称：佛山市三水凤铝铝业有限公司
证书编号：GR202144014364
发证日期：2021年12月31日
有 效 期：三年
批准机关：

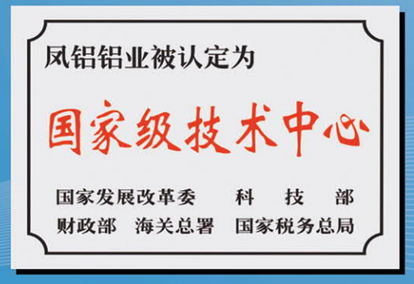
凤铝铝业被认定为
国家级技术中心
国家发展改革委 科 技 部
财政部 海关总署 国家税务总局


企业信用评价AAA级信用企业
ENTERPRISE CREDIT EVALUATION
证书编号：20170301100011
Certificate Number
颁发日期：2018年10月8日
Date of Issue
有效期至：2021年10月7日
Date of Expiry
查询网址：www.chinaNIA.org.cn
Enquiring Website
中国有色金属工业协会
CHINA NONFERROUS METALS INDUSTRY ASSOCIATION


中国节能产品认证证书
证书编号：CQC13701104090
中国质量认证中心


中国合格评定国家认可委员会
实验室认可证书
（注册号：CNAS L3957）
佛山市三水凤铝铝业有限公司检测中心
广东省佛山市三水区西南街道河口左田民营开发区，528133
2020-05-20
2024-03-12


CERTIFICATE
环境管理体系认证证书
GB/T 24001-2016/ISO 14001:2015


CERTIFICATE
职业健康安全管理体系认证证书
GB/T 45001-2020/ISO 45001:2018


CERTIFICATE
质量管理体系认证证书
GB/T 19001-2016/ISO 9001:2015


国家火炬计划项目证书
项目名称：环保型无铬易切削6xxx铝合金材料产业化项目
项目编号：2007GHO30386


有色金属产品实物质量
金杯奖证书
2019-50
单位名称：广东凤铝铝业有限公司
产品名称：一般工业用铝及铝合金锭压型材
注册商标：凤铝
牌号或规格：6082
执行标准：GB/T 6892-2015
发证日期：2020 年 1 月 12 日
有 效 期：2020 年 1 月 12 日至 2023 年 1 月 11 日


ABS
CERTIFICATE OF
ALUMINUM MILLS
FACILITY AND PROCESS APPROVAL
FOSHAN SANSHUI FENGLU ALUMINIUM CO., LTD
ZUOTIAN DEVELOPMENT ZONE, FOSHAN, China, 528133
Extrusions components for marine applications
Marcus Cridland
Chief Metallurgist, ABS


DNV·GL
APPROVAL OF MANUFACTURER CERTIFICATE
This is to certify:
That
Foshan Sanshui Fenglu Aluminium Co. Ltd.
FOSHAN, GUANGDONG, China
is an approved manufacturer of
Wrought Aluminium and Aluminium Alloys
in accordance with
DNV GL rules for classification – Ships
and the following particulars:
Issued at Hamburg on 2021-02-04
This Certificate is valid until 2022-12-31.
Thorsten Lohmann
Head of Section


IRIS
Certification
CERTIFICATE
Foshan Sanshui Fenglu Aluminium Co.,Ltd.
Zuotian Minying Development Zone, Hekou, Xinan Street, Sanshui District, Foshan City, Guangdong, P.R.China
528133, Foshan
China
BUREAU VERITAS CERTIFICATION
IRIS Certification® Conformity assessment:2020
and based on
ISO/TS 22163:2017
Bureau Veritas Certification


CERTIFICATE
能源管理体系认证证书
佛山市三水凤铝铝业有限公司
GB/T 23331-2020/ISO 50001:2018
RB/T 117-2014


采筑认证联盟认证证书
采筑认证联盟
AUPUP 采筑


Bureau Veritas Certification
Certificate of Approval
Foshan Sanshui Fenglu Aluminium Co.,Ltd.
Zuotian Minying Development Zone, Hekou, Xinan Street, Sanshui District, Foshan City, Guangdong Province, 528133, China
IATF 16949 – First Edition
ISO/PC
PERMITTED EXCLUSION(S)
8.3 - Design and development of products and services
PRODUCT(S) DELIVERED
Aluminium alloy profiles


Bureau Veritas Certification
Appendix to the Certificate of Approval
Foshan Sanshui Fenglu Aluminium Co.,Ltd.
Zuotian Minying Development Zone, Hekou, Xinan Street, Sanshui District, Foshan City, Guangdong Province, 528133, China
IATF 16949 – First Edition
REMOTE SUPPORT FUNCTION(S)


CERTIFICATE
for a COATING APPLICATOR
QUALICOAT
Foshan Sanshui Fenglu Aluminium Co., Ltd
Hekou Development Zone
Sanshui District
528100 Foshan City / Guangdong
China
Licence No.: 3403
Date of Granting: 17.08.2009
Valid until: 31.12.2022
Ext. C. C. Ferroli
Managing Director


Authorization
to use the quality sign
QUALITY LABEL
Qualanod
ARCHITECTURE
This is to certify that
Foshan Sanshui Fenglu Aluminium Co., Ltd
Hekou Development Zone
Sanshui District
CN – 528100 Foshan City / Guangdong
China
is authorized to use the quality label in accordance with the regulations for the use of the quality label for ANODISED architectural aluminium according to the current edition of the Specifications for the QUALANOD quality label for exterior architectural anodizing of aluminium (QUALANOD Specifications). Architectural anodizing is one of the four types of anodizing covered by the Specifications.
Licence number: 2702
Date of issue of the licence: 19.09.2011
Period of validity of the licence: until 31.12.2022
Zurich, 1st December 2021
QUALANOD
CERTIFICATION BODY
Dr. Martin Yliniap
President
Monica Gerber
General Secretary

生产装备 日新月异
PRODUCTION FACILITIES

凤铝门窗拥有最具规模的门窗生产基地，建立健全了从开料、组装、检验到包装等全流程的自动化门窗生产体系。所有生产环节均实现了智能化控制，并严格按照国家的环保标准进行生产局部，确保了每一款产品的环保和时尚。凤铝门窗推行高于国标的质量管控措施，确保了每一款产品综合性能的优越。


凤铝门窗拥有独立的产品研发和技术控制团队，获得一系列产品制作专利，加上优选的凤铝型材，标配的一线品牌五金，产品整体显现出结构稳固、触感顺滑，隔音隔热效果突出，长期使用不变形、不变色的突出特点，是真正意义上的安全耐用门窗。“家装门窗，首选凤铝”，凤铝门窗正以环保、时尚、安全、耐用的品质成为家庭装修的首选品牌。

Fenglu Aluminium Doors and Windows have the largest scale of doors and windows production base, established and improved the cutting material, assembly, inspection to packaging from the whole process of automatic doors and windows production system. All the production links have realized intelligent control, and in strict accordance with the national environmental protection standards for local production, to ensure the environmental protection and fashion of each product. The Fenglu Aluminium Doors and Windows implementation is higher than the national standard of quality control measures, to ensure that the comprehensive performance of each product is superior.

Fenglu Aluminium Doors and Windows have independent product research and development and technical control team, a series of product production patents, plus use preferred Fenglu aluminium profile and is standard equipped with the first line brand hardware. The product overall shows the outstanding feature，stable structure, smooth feeling, good sound insulation effect, long-term use without deformation and color change. It is the real sense of safe and durable doors and windows. "Home decoration doors and windows, Preferred Fenglu Doors and Windows". Fenglu Doors and Windows is becoming the preferred brand of family decoration because of its environmental protection, fashion, safe, durable quality.



可生产型材截面1000 x 400mm, 管材最大外径700mm的20000T生产线
It can produce 20000T production line with profile section of 1000 x 400mm and maximum outer diameter of pipe of 700mm

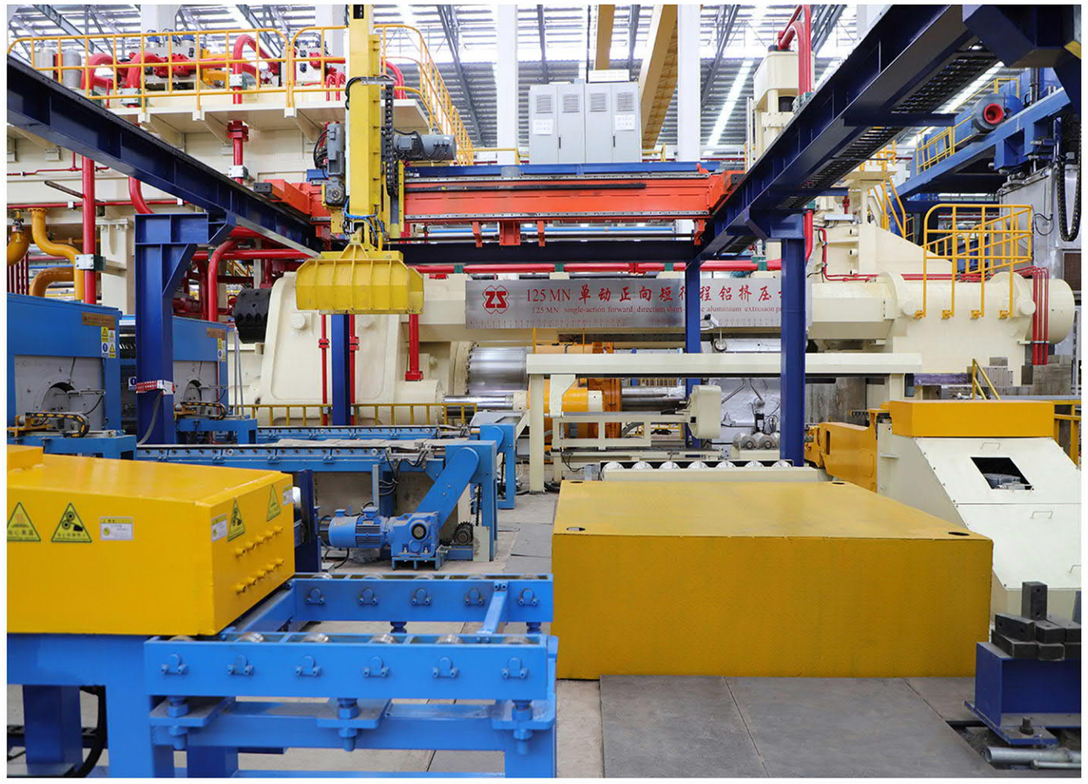

可生产型材截面900 x 400mm, 管材最大外径600mm的12500T生产线
It can produce 12500T production line with profile section of 900 x 400mm and maximum outer diameter of pipe of 600mm



立式喷漆1线
Vertical Powder Coating Line



立式氧化2A线
Vertical Anodizing Line

凤铝门窗 大品牌 更放心

目 录

CONTENTS

隔热平开窗系列

GPK75D系列隔热内平开窗 ····· 02-04
GPK86D系列隔热双内平开窗 ····· 05-07
GPK90P系列隔热双内平开窗 ····· 08-12
GPK100系列隔热平开窗纱一体 ····· 13-15
G110BG系列隔热平开窗纱一体 ····· 16-30
GPK115D系列隔热平开窗纱一体 ····· 31-35
GPK115E系列隔热平开窗纱一体 ····· 36-39
JGP110系列隔热平开窗纱一体 ····· 40-50
JGP125系列隔热平开窗纱一体 ····· 51-63
JGP135系列隔热平开窗纱一体 ····· 64-70

平开窗系列

PK76K系列平开窗纱一体 ····· 72-75
PK88T系列平开窗纱一体 ····· 76-79

隔热推拉窗系列

GTL108A系列隔热推拉窗 ····· 81-88
G108TL系列隔热推拉窗 ····· 89-93
TG136A系列隔热推拉窗 ····· 94-98

推拉门窗系列

108AD系列推拉窗 ····· 99-104
TL190系列推拉门 ····· 106-110
TM110Y系列极窄室内推拉门 ····· 111-117

阳光房系列

YGF120E系列阳光房 ····· 118-125





隔热平开窗系列


可视面开阔 美观大气 防撬防盗

- 凤铝平开窗，精选凤铝断桥铝型材，整窗框扇内外平齐结构设计，隐藏排水，在视觉上更能呈现出现代感，整体外观简洁美观。
- 采用汽车级复合胶条，多道密封，隔音、隔热效果突出。产品功能齐全，型材通用性强，多样化开启方式，可满足不同场景及客户使用需求。
- 防护栏可选择开启，既可逃生又能防盗，安全性能极大提升。
- 优质隔热条，保温隔热，无惧寒暑。

GPK75D系列隔热内平开窗装配图

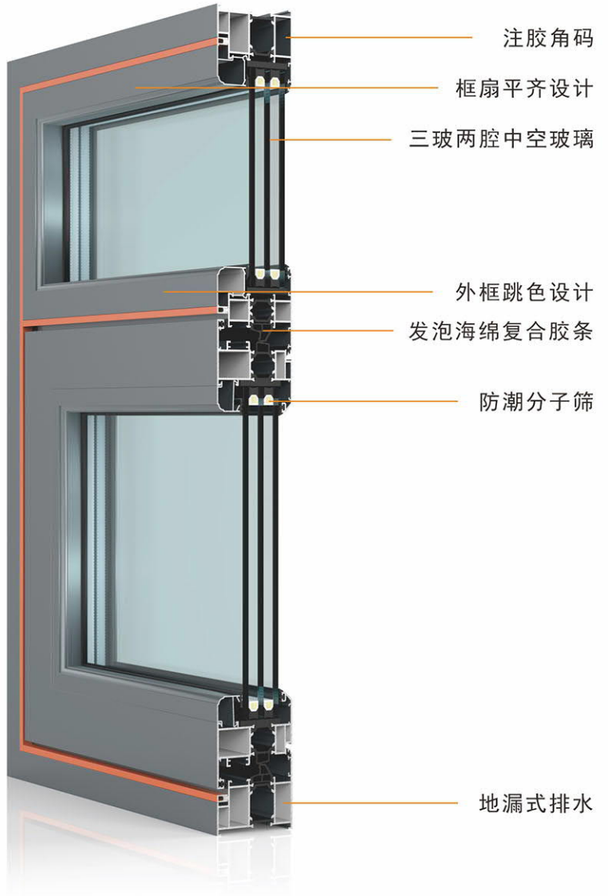

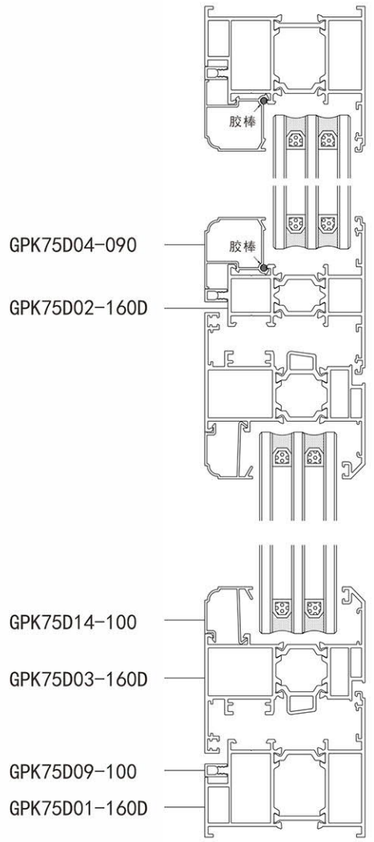


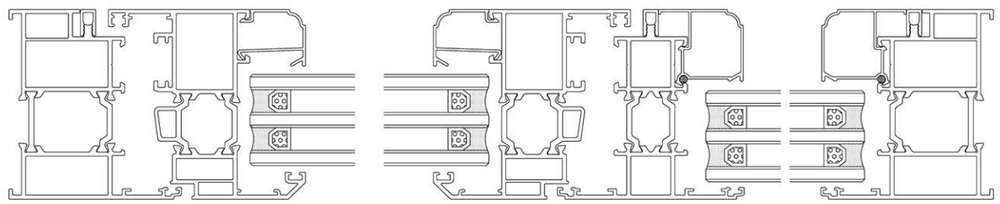


1500mm x 2000mm x 300mm单开标窗每平方用料：8.295kg/m2

GPK75D系列隔热内平开窗截面图


（隔热条宽度为24mm）




配GPK75D04-090压线
GPK75D09-100
配GPK75D10-220U角码




型号	GPK75D01-160D	名称	框料	型号	GPK75D14-100	名称	压线
壁厚(mm)	1.6	米重(kg/m)	1.694	壁厚(mm)	1.0	米重(kg/m)	0.222




配GPK75D04-090压线
GPK75D09-100
配GPK75D29-220U连接件
配GPK75D19-250连接件




型号	GPK75D02-160D	名称	中梃	型号	GPK75D09-100	名称	辅料
壁厚(mm)	1.6	米重(kg/m)	1.43	壁厚(mm)	1.0	米重(kg/m)	0.078




配GPK75D14-100压线
配TG701039D-220U角码



型号	GPK75D03-160D	名称	扇料	型号	GPK75D10-220U	名称	角码
壁厚(mm)	1.6	米重(kg/m)	1.736	壁厚(mm)	2.3	米重(kg/m)	2.484







型号	GPK75D04-090	名称	压线	型号	TG701039D-220U	名称	角码
壁厚(mm)	0.9	米重(kg/m)	0.296	壁厚(mm)	2.3	米重(kg/m)	1.742

GPK75D系列隔热内平开窗截面图

（隔热条宽度为24mm）





型号	GPK75D19-250	名称	中梃连接件		
壁厚(mm)	2.5	米重(kg/m)	0.944		




型号	GPK75D29-220U	名称	中梃连接件		
壁厚(mm)	2.3	米重(kg/m)	1.324		

GPK86D系列隔热双内平开窗装配图

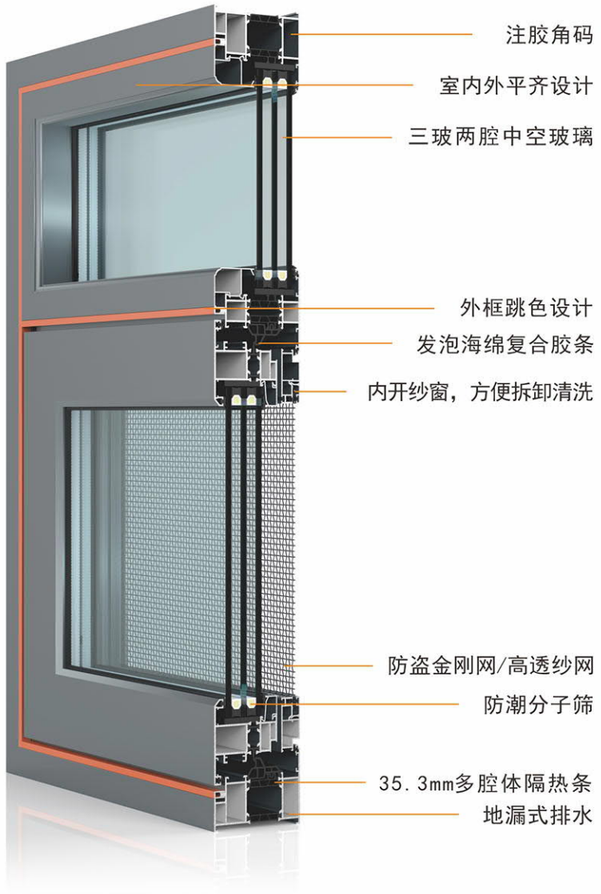

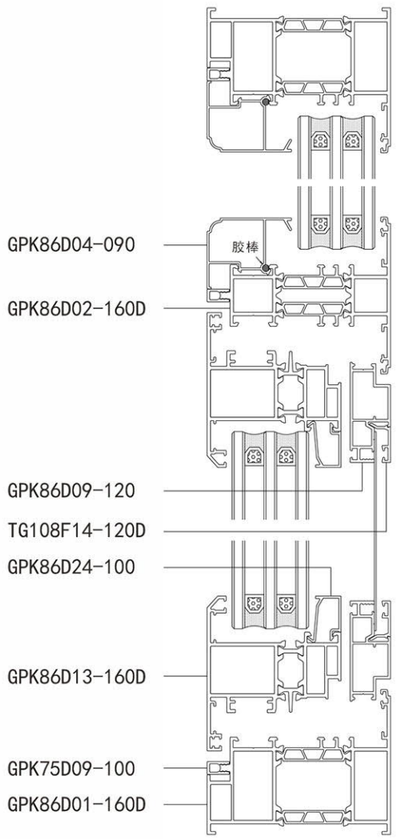


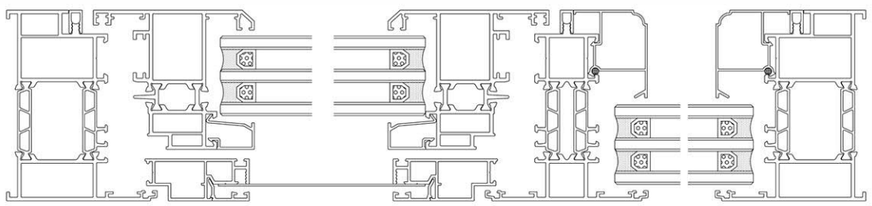


1500mm x 2000mm x 300mm单开标窗每平方用料：9.073kg/m²


GPK86D系列隔热双内平开窗截面图


（隔热条宽度为25.3mm）

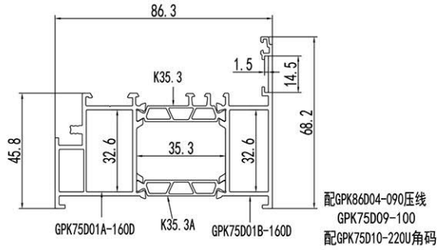





型号	GPK86D01-160D	名称	框料	型号	GPK86D09-120	名称	纱扇
壁厚(mm)	1.6	米重(kg/m)	1.793	壁厚(mm)	1.2	米重(kg/m)	0.485

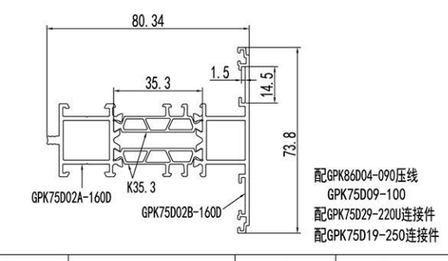





型号	GPK86D02-160D	名称	中梃	型号	GPK86D04-090	名称	压线
壁厚(mm)	1.6	米重(kg/m)	1.539	壁厚(mm)	0.9	米重(kg/m)	0.334

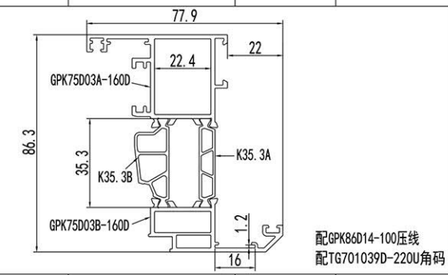



型号	GPK86D03-160D	名称	扇料	型号	GPK86D14-100	名称	压线
壁厚(mm)	1.6	米重(kg/m)	1.789	壁厚(mm)	1.0	米重(kg/m)	0.252

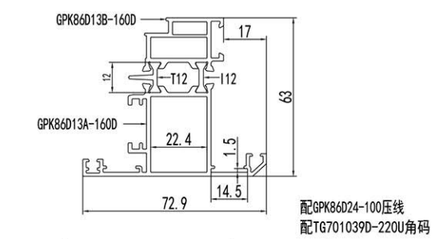





型号	GPK86D13-160D	名称	扇料	型号	GPK86D24-100	名称	压线
壁厚(mm)	1.6	米重(kg/m)	1.587	壁厚(mm)	1.0	米重(kg/m)	0.162


GPK86D系列隔热双内平开窗截面图


（隔热条宽度为25.3mm）






型号	GPK75D09-100	名称	辅料	型号	GPK75D10-220U	名称	角码
壁厚(mm)	1.0	米重(kg/m)	0.078	壁厚(mm)	2.3	米重(kg/m)	2.484






型号	GPK75D19-250	名称	中梃连接件	型号	TG701039D-220U	名称	角码
壁厚(mm)	2.5	米重(kg/m)	0.947	壁厚(mm)	2.3	米重(kg/m)	1.742





型号	GPK75D29-220U	名称	中梃连接件
壁厚(mm)	2.3	米重(kg/m)	1.324




型号	TG108F14-120D	名称	压线
壁厚(mm)	1.2(1.08)	米重(kg/m)	0.102

GPK90P系列隔热双内平开窗装配图

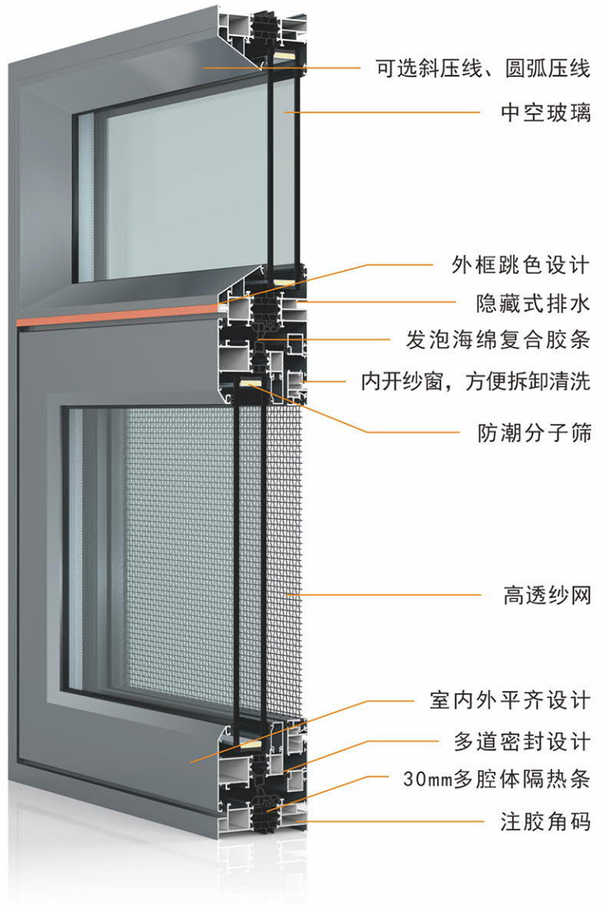

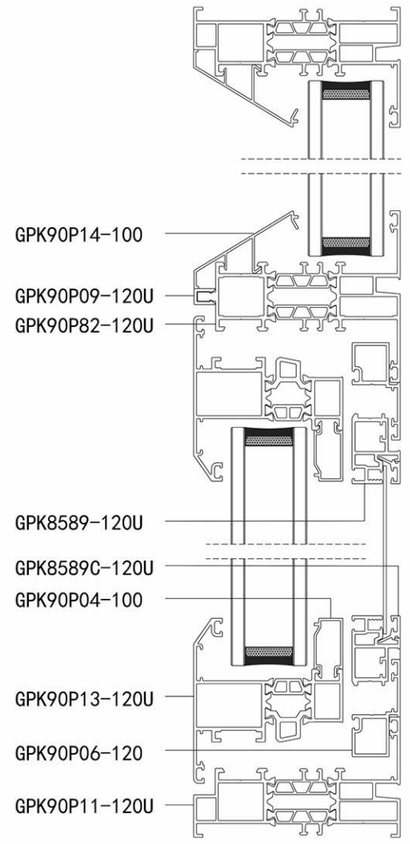


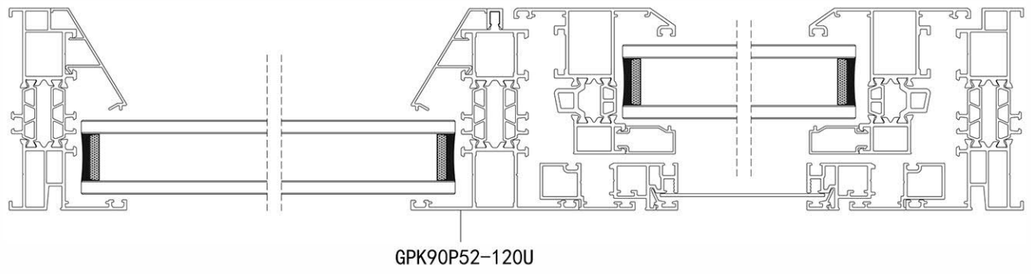


1500mm x 2000mm x 300mm单开标窗每平方用料：8.181kg/m²(不含护栏)


GPK90P系列隔热双内平开窗截面图


（隔热条宽度为30mm）

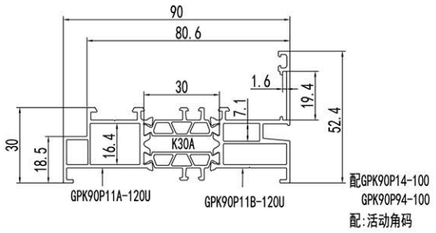

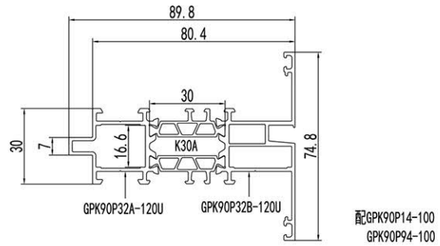



型号	GPK90P11-120U	名称	框料	型号	GPK90P32-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.487	壁厚(mm)	1.3	米重(kg/m)	1.641

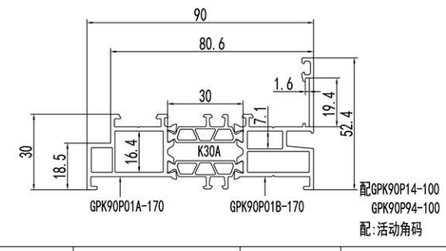

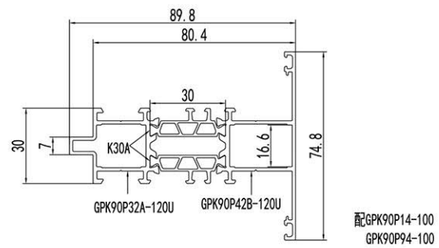



型号	GPK90P01-170	名称	框料	型号	GPK90P42-120U	名称	中梃
壁厚(mm)	1.7	米重(kg/m)	1.651	壁厚(mm)	1.3	米重(kg/m)	1.546

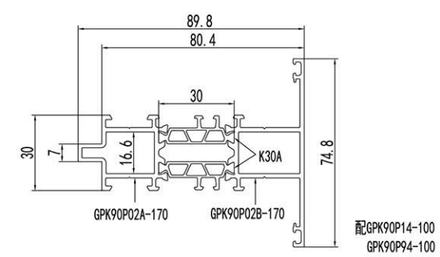

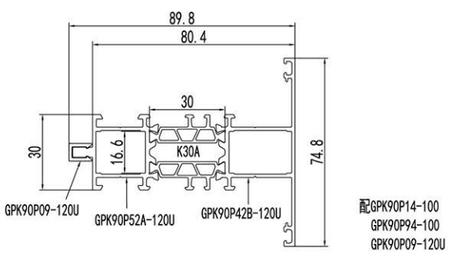

型号	GPK90P02-170	名称	中梃	型号	GPK90P52-120U	名称	中梃
壁厚(mm)	1.7	米重(kg/m)	1.719	壁厚(mm)	1.3	米重(kg/m)	1.566

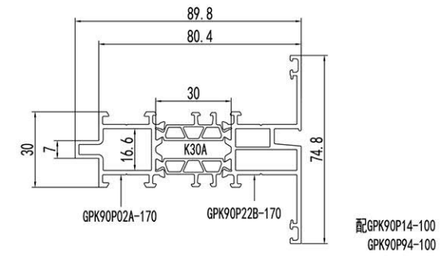


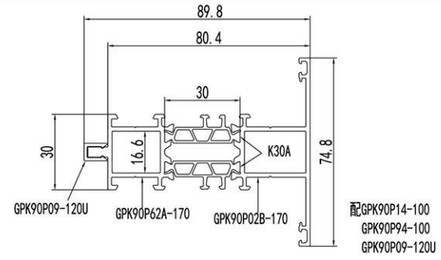


型号	GPK90P22-170	名称	中梃	型号	GPK90P62-170	名称	中梃
壁厚(mm)	1.7	米重(kg/m)	1.812	壁厚(mm)	1.7	米重(kg/m)	1.732


GPK90P系列隔热双内平开窗截面图


（隔热条宽度为30mm）

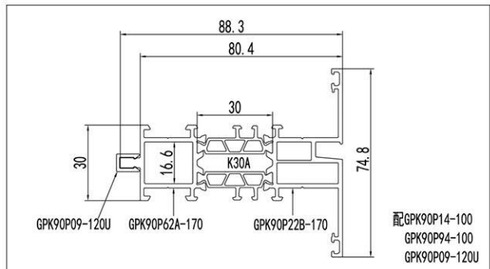

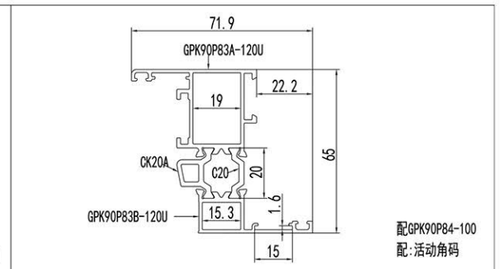



型号	GPK90P72-170	名称	中梃	型号	GPK90P83-120U	名称	扇料
壁厚(mm)	1.7	米重(kg/m)	1.799	壁厚(mm)	1.3	米重(kg/m)	1.307

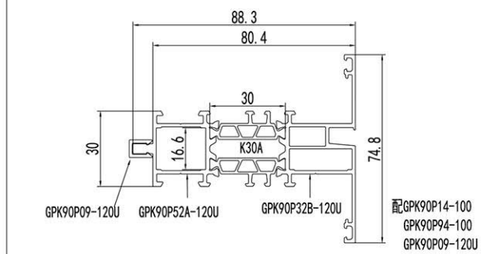

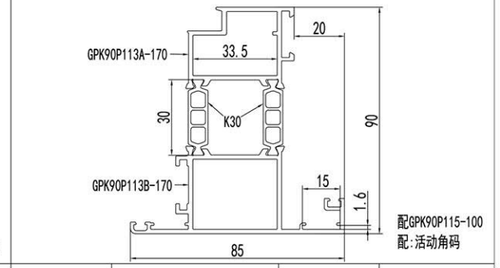



型号	GPK90P82-120U	名称	中梃	型号	GPK90P113-170	名称	扇料
壁厚(mm)	1.3	米重(kg/m)	1.635	壁厚(mm)	1.7	米重(kg/m)	2.142

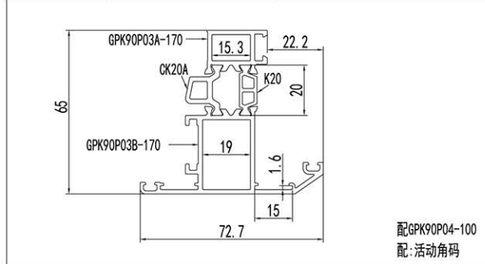

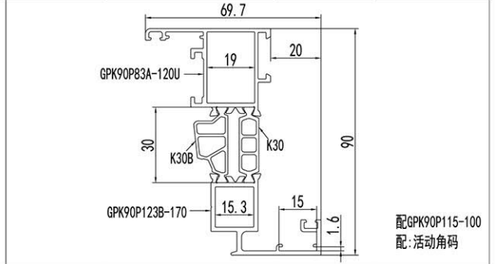

型号	GPK90P03-170	名称	扇料	型号	GPK90P123-T01	名称	扇料
壁厚(mm)	1.7	米重(kg/m)	1.542	壁厚(mm)	1.3/1.7	米重(kg/m)	1.716

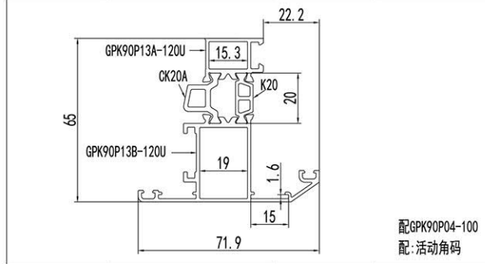


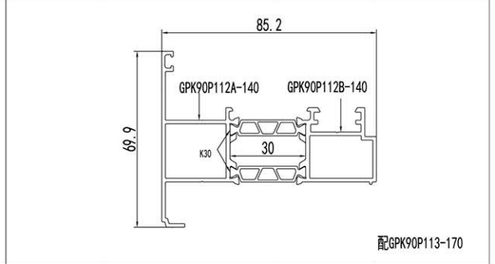


型号	GPK90P13-120U	名称	扇料	型号	GPK90P112-140	名称	假中梃
壁厚(mm)	1.3	米重(kg/m)	1.354	壁厚(mm)	1.4	米重(kg/m)	1.595

GPK90P系列隔热双内平开窗截面图

（隔热条宽度为30mm）




配GPK90P11-120U
配:活动角码




配GPK90P83-120U

型号	GPK90P06-120	名称	纱窗框	型号	GPK90P84-100	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.359	壁厚(mm)	1.0	米重(kg/m)	0.222



配:活动角码




配GPK90P123-T01
GPK90P113-170


型号	GPK90P126-120	名称	纱窗框	型号	GPK90P115-100	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.429	壁厚(mm)	1.0	米重(kg/m)	0.25




配GPK90P52-120U
GPK90P62-170



型号	GPK90P09-120U	名称	辅料	型号	GPK90P14-100	名称	压线
壁厚(mm)	1.3	米重(kg/m)	0.078	壁厚(mm)	1.0	米重(kg/m)	0.246




配GPK90P13-120U



型号	GPK90P04-100	名称	压线	型号	GPK90P94-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.181	壁厚(mm)	1.0	米重(kg/m)	0.364


GPK90P系列隔热双内平开窗截面图

（隔热条宽度为30mm）



配 GPK8589C-120U 压线
配:活动角码


型号	GPK8589-120U	名称	纱扇	
壁厚(mm)	1.3	米重(kg/m)	0.446	




型号	GPK8589C-120U	名称	压线	
壁厚(mm)	1.3	米重(kg/m)	0.084	

GPK100 系列隔热平开窗纱一体装配图



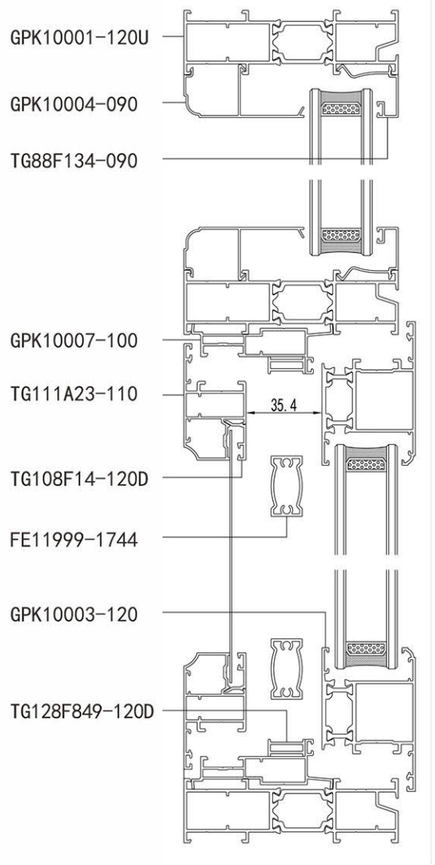


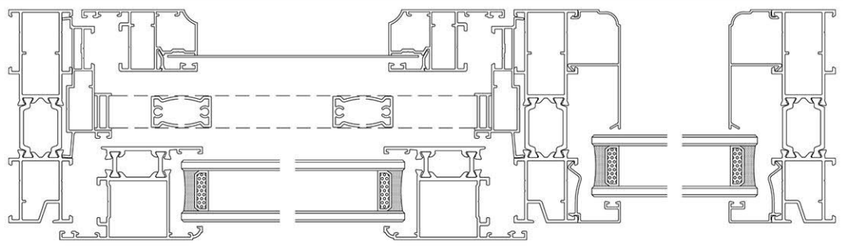

1500mm x 2000mm x 300mm单开标窗每平方用料：7.9kg/m^2(不含护栏)


GPK100 系列隔热平开窗纱一体截面图

（隔热条宽度为28mm）




配:活动角码

型号	GPK10001-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.331




配:活动角码

型号	GPK10023-T01	名称	扇料
壁厚(mm)	1.8	米重(kg/m)	1.278




配:活动角码
配GPK10001-120U



配:活动角码


型号	GPK10007-100	名称	附框
壁厚(mm)	1.0	米重(kg/m)	0.496

型号	GPK10033-120	名称	扇料
壁厚(mm)	1.2	米重(kg/m)	1.092




配:活动角码

型号	GPK10003-120	名称	扇料
壁厚(mm)	1.2	米重(kg/m)	1.092




配GPK10001-120U

型号	GPK10004-090	名称	压线
壁厚(mm)	0.9	米重(kg/m)	0.275



配:活动角码




型号	GPK10013-T01	名称	扇料
壁厚(mm)	1.8	米重(kg/m)	1.269

型号	TG88F134-090	名称	压线
壁厚(mm)	0.9	米重(kg/m)	0.188


GPK100 系列隔热平开窗纱一体截面图

（隔热条宽度为28mm）




配:活动角码
配 TG108F14-120D 压线


型号	TG111A23-110	名称	纱扇
壁厚(mm)	1.1	米重(kg/m)	0.564




型号	TG108F14-120D	名称	压线
壁厚(mm)	1.2(1.08)	米重(kg/m)	0.102




型号	TG128F849-120D	名称	防盗格
壁厚(mm)	1.1	米重(kg/m)	0.138



型号	FE11999-1744	名称	格条
壁厚(mm)	1.2	米重(kg/m)	0.320

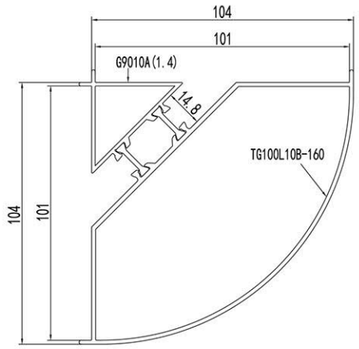



型号	TG100L10-T01	名称	转角
壁厚(mm)	1.6	米重(kg/m)	2.243




型号	9010	名称	转角
壁厚(mm)	1.4	米重(kg/m)	1.333

G110BG 系列隔热平开窗纱一体装配图

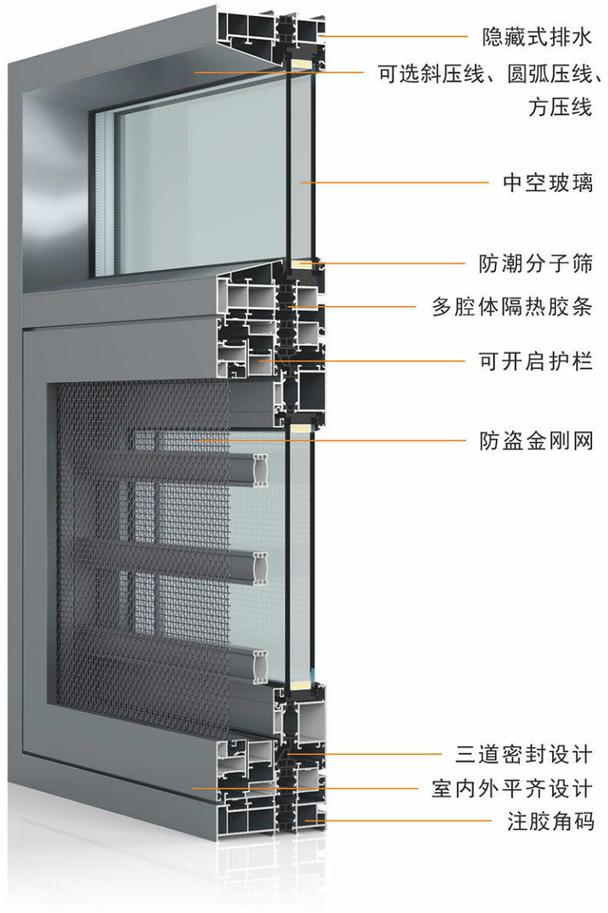

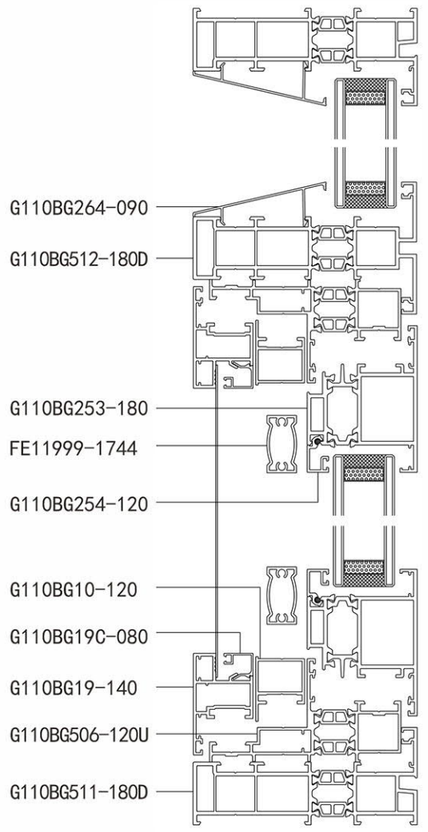


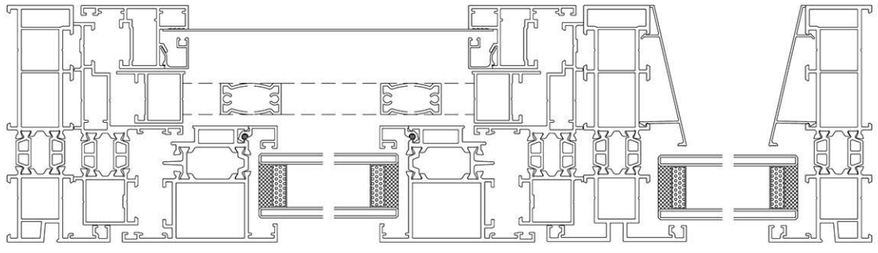

1500mm x 2000mm x 300mm单开标窗每平方用料：11.969kg/m²(不含护栏)


G110BG 系列隔热平开窗纱一体截面图

（20I条 隔热条宽度为20mm）

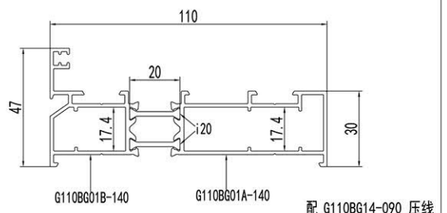


配 G110BG14-090 压线
配:活动角码

型号	G110BG01-140	名称	框料
壁厚(mm)	1.4	米重(kg/m)	1.599

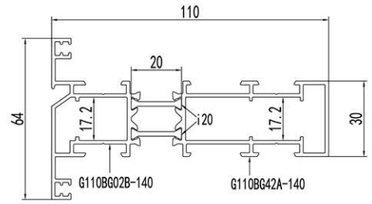


配G110BG14-090 压线

型号	G110BG42-140	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	1.877

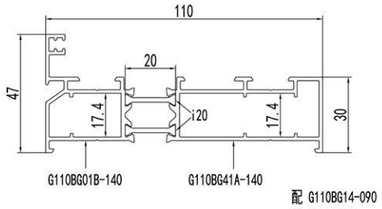


配 G110BG14-090 压线
配:活动角码

型号	G110BG41-140	名称	框料
壁厚(mm)	1.4	米重(kg/m)	1.613




配 G110BG84-090

型号	G110BG82-140	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	0.519




配 G110BG14-090 压线
配:活动角码

型号	G110BG51-180	名称	框料
壁厚(mm)	1.8	米重(kg/m)	1.904

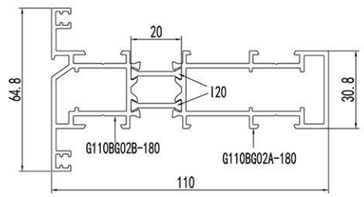


配 G110BG14-090 压线

型号	G110BG02-180	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.174

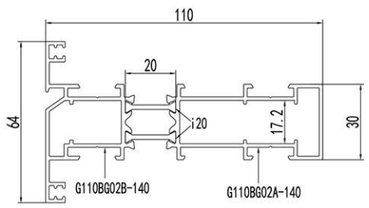

配 G110BG14-090 压线

型号	G110BG02-140	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	1.848




配 G110BG64-100
G110BG14-090压线
配 G110BG66-120

型号	G110BG62-120	名称	中梃
壁厚(mm)	1.2	米重(kg/m)	1.461


G110BG 系列隔热平开窗纱一体截面图

（20I条 隔热条宽度为20mm）

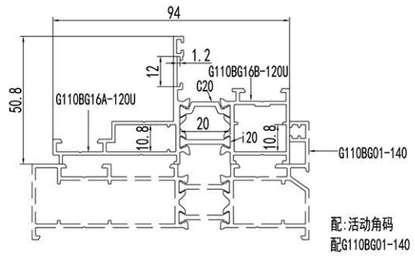

配:活动角码
配G110BG01-140

型号	G110BG16-120U	名称	附框
壁厚(mm)	1.3	米重(kg/m)	1.333

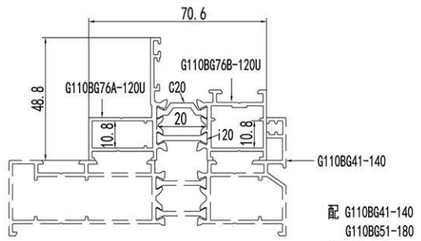


配 G110BG41-140
G110BG51-180
配:活动角码

型号	G110BG76-120U	名称	附框
壁厚(mm)	1.3	米重(kg/m)	1.174


G110BG 系列隔热平开窗纱一体截面图

（20C条 隔热条宽度为20mm）

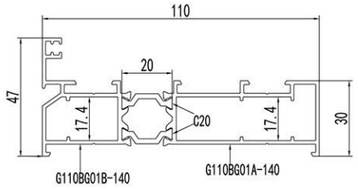


配 G110BG14-090 压线
配:活动角码

型号	G110BG81-140	名称	框料
壁厚(mm)	1.4	米重(kg/m)	1.622

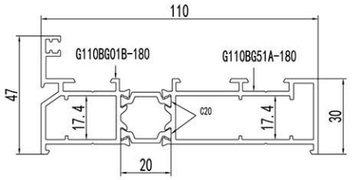


配 G110BG14-090 压线
配:活动角码

型号	G110BG121-180	名称	框料
壁厚(mm)	1.8	米重(kg/m)	1.927

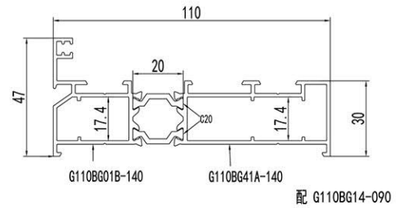


配 G110BG14-090 压线
配:活动角码

型号	G110BG271-140	名称	框料
壁厚(mm)	1.4	米重(kg/m)	1.636

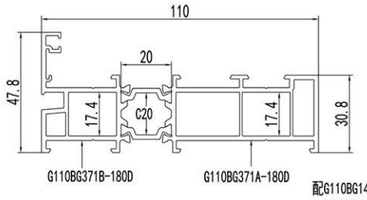


配G110BG14-090压线
G110BG374-100
配:活动角码

型号	G110BG371-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.092

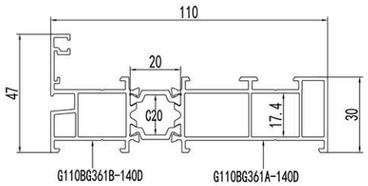


配G110BG14-090压线
G110BG374-100
配:活动角码

型号	G110BG361-140D	名称	框料
壁厚(mm)	1.4	米重(kg/m)	1.797

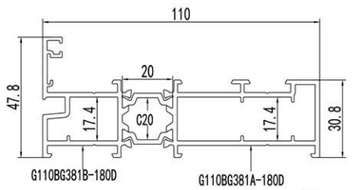


配G110BG14-090压线
G110BG374-100
配:活动角码

型号	G110BG381-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	1.994

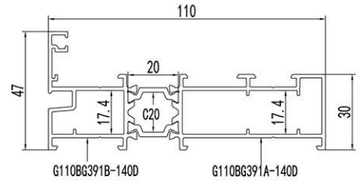

配G110BG14-090压线
G110BG374-100
配:活动角码

型号	G110BG391-140D	名称	框料
壁厚(mm)	1.4	米重(kg/m)	1.702

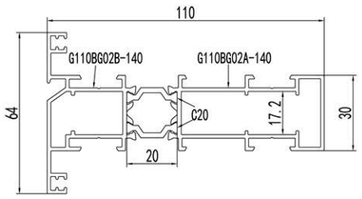


配 G110BG14-090 压线

型号	G110BG102-140	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	1.872


G110BG 系列隔热平开窗纱一体截面图

（20C条 隔热条宽度为20mm）

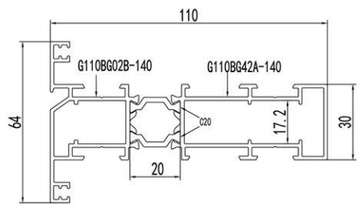


配 G110BG14-090 压线

型号	G110BG272-140	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	1.900

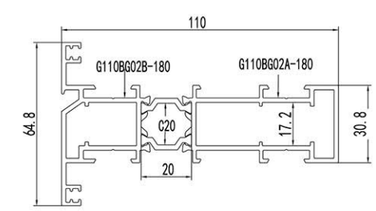


配 G110BG14-090 压线

型号	G110BG262-180	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.197




配 G110BG84-090

型号	G110BG312-140	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	1.523

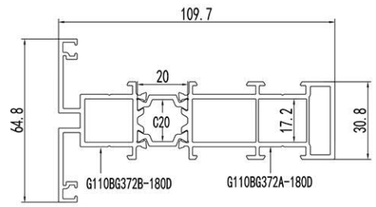


配G110BG14-090压线

型号	G110BG372-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.247

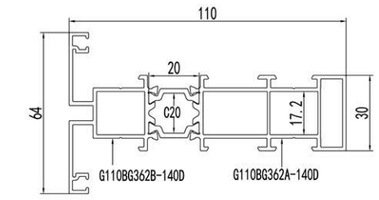


配G110BG14-090压线

型号	G110BG362-140D	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	1.939

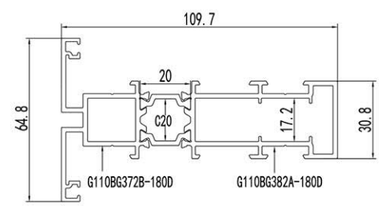


配G110BG14-090压线

型号	G110BG382-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.176

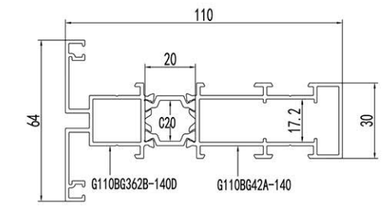

配G110BG14-090压线

型号	G110BG392-140D	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	1.862

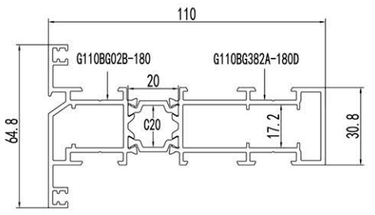


配G110BG14-090压线


型号	G110BG402-180	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.225

G110BG系列隔热平开窗纱一体截面图

（20C条 隔热条宽度为20mm）




配 G110BG64-100
G110BG14-090压线
配 G110BG66-120

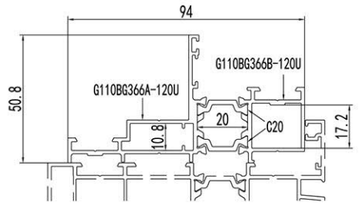


配:活动角码

型号	G110BG72-120	名称	中梃	型号	G110BG366-120U	名称	附框
壁厚(mm)	1.2	米重(kg/m)	1.484	壁厚(mm)	1.3	米重(kg/m)	1.352




配:活动角码

型号	G110BG236-120U	名称	附框
壁厚(mm)	1.3	米重(kg/m)	1.345



配:活动角码

型号	G110BG176-120U	名称	附框
壁厚(mm)	1.3	米重(kg/m)	1.186




配:活动角码


型号	G110BG546-120U	名称	附框
壁厚(mm)	1.3	米重(kg/m)	1.356

G110BG系列隔热平开窗纱一体截面图

（20多腔体 隔热条宽度为20mm）

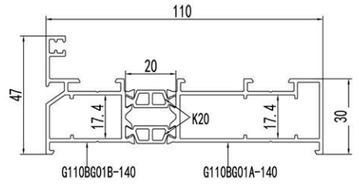


配 G110BG14-090 压线
配:活动角码

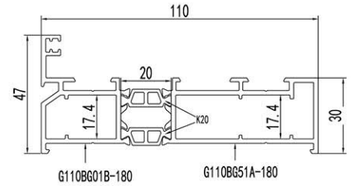


配 G110BG14-090 压线
配:活动角码

型号	G110BG71-140	名称	框料	型号	G110BG251-180	名称	框料
壁厚(mm)	1.4	米重(kg/m)	1.665	壁厚(mm)	1.8	米重(kg/m)	1.97




配 G110BG14-090 压线
配:活动角码

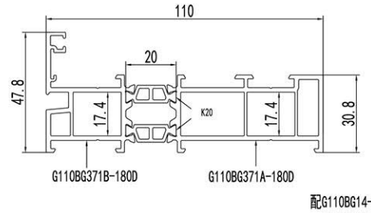


配G110BG14-090压线
G110BG374-100
配:活动角码

型号	G110BG281-140	名称	框料	型号	G110BG511-180D	名称	框料
壁厚(mm)	1.4	米重(kg/m)	1.6786	壁厚(mm)	1.8	米重(kg/m)	2.135

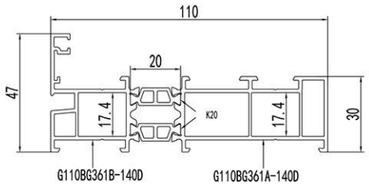


配G110BG14-090压线
G110BG374-100
配:活动角码

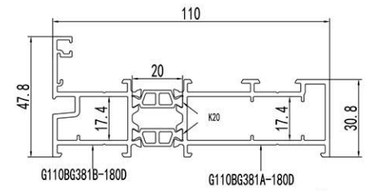


配G110BG14-090压线
G110BG374-100
配:活动角码

型号	G110BG501-140D	名称	框料	型号	G110BG521-180D	名称	框料
壁厚(mm)	1.4	米重(kg/m)	1.84	壁厚(mm)	1.8	米重(kg/m)	2.037

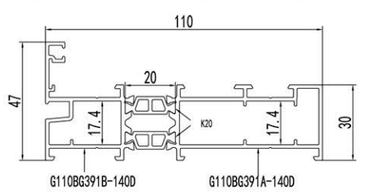

配G110BG14-090压线
G110BG374-100
配:活动角码

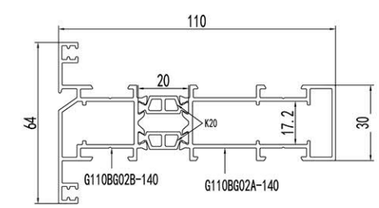


配 G110BG14-090 压线


型号	G110BG531-140D	名称	框料	型号	G110BG92-140	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	1.745	壁厚(mm)	1.4	米重(kg/m)	1.9146

G110BG系列隔热平开窗纱一体截面图

（20C条 隔热条宽度为20mm）

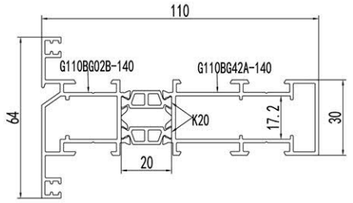


配G110BG14-090 压线

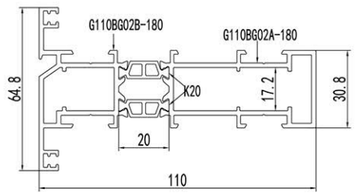


配 G110BG14-090 压线

型号	G110BG282-140	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	1.9426

型号	G110BG252-180	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.24




配 G110BG84-090

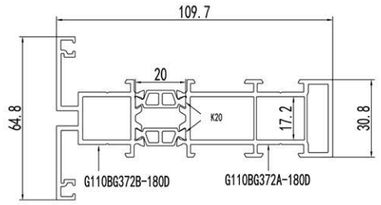


配G110BG14-090压线

型号	G110BG322-140	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	1.5656

型号	G110BG512-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.29

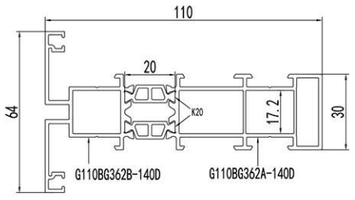


配G110BG14-090压线

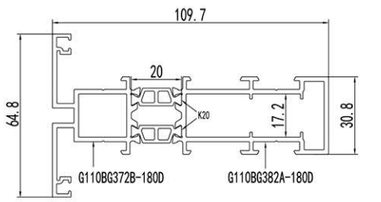


配G110BG14-090压线

型号	G110BG502-140D	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	1.982

型号	G110BG522-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.219

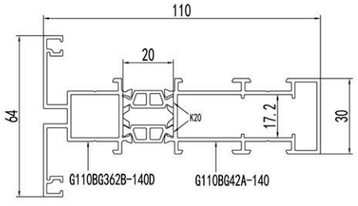

配G110BG14-090压线

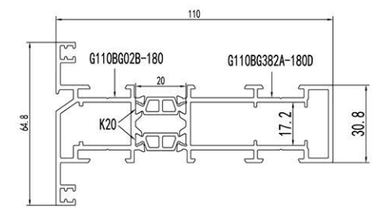


配G110BG14-090压线

型号	G110BG532-T01	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	1.905


型号	G110BG542-T01	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.268

G110BG系列隔热平开窗纱一体截面图

（20多腔体 隔热条宽度为20mm）




配 G110BG64-100
G110BG14-090压线
配 G110BG66-120

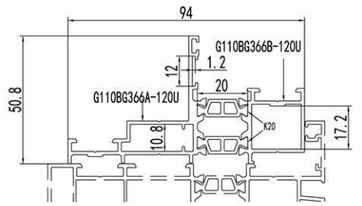

配:活动角码


型号	G110BG292-120	名称	中梃
壁厚(mm)	1.2	米重(kg/m)	1.5266

型号	G110BG506-120U	名称	附框
壁厚(mm)	1.3	米重(kg/m)	1.395




配:活动角码

型号	G110BG226-120U	名称	附框
壁厚(mm)	1.3	米重(kg/m)	1.388



配:活动角码

型号	G110BG276-120U	名称	附框
壁厚(mm)	1.3	米重(kg/m)	1.2286




配:活动角码


型号	G110BG256-120U	名称	附框
壁厚(mm)	1.3	米重(kg/m)	1.398

G110BG 系列隔热平开窗纱一体截面图

（扇、纱扇、压线、转角、辅料）

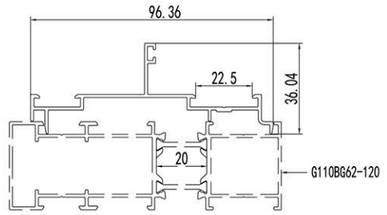


配 G110BG62-120




配G110BG254-120压线
配:活动角码

型号	G110BG66-120	名称	附框	型号	G110BG253-180	名称	扇料
壁厚(mm)	1.2	米重(kg/m)	0.601	壁厚(mm)	1.8	米重(kg/m)	1.537

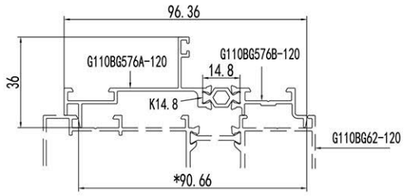


配 G110BG62-120




配:活动角码

型号	G110BG576-120	名称	附框	型号	G110BG363-T01	名称	扇料
壁厚(mm)	1.2	米重(kg/m)	0.749	壁厚(mm)	1.4	米重(kg/m)	1.325




配:活动角码




配G110BG594-120压线
配:活动角码

型号	G110BG63-120	名称	扇料	型号	G110BG593-140D	名称	扇料
壁厚(mm)	1.2	米重(kg/m)	1.2564	壁厚(mm)	1.4	米重(kg/m)	1.397



配:活动角码




配:活动角码


型号	G110BG73-T01	名称	扇料	型号	G110BG603-T01	名称	扇料
壁厚(mm)	1.2	米重(kg/m)	1.322	壁厚(mm)	1.8	米重(kg/m)	1.487

G110BG 系列隔热平开窗纱一体截面图

（扇、纱扇、压线、转角、辅料）




配:活动角码
配G110BG19C-080压线

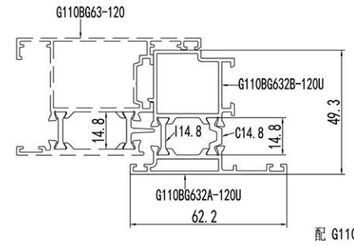


配 G110BG63-120

型号	G110BG109-100	名称	纱扇	型号	G110BG632-120U	名称	假中梃
壁厚(mm)	1.0	米重(kg/m)	0.516	壁厚(mm)	1.3	米重(kg/m)	1.121




配G110BG19C-080压线
配TG65M07-560角码




配 G110BG19-140

型号	G110BG19-140	名称	纱扇	型号	G110BG642-120	名称	假中梃
壁厚(mm)	1.4	米重(kg/m)	0.645	壁厚(mm)	1.2	米重(kg/m)	0.439




配:活动角码
配 G110BG69C-090 压线




配:活动角码

型号	G110BG69-120D	名称	纱扇	型号	G110BG10-120	名称	防盗格
壁厚(mm)	1.1	米重(kg/m)	0.649	壁厚(mm)	1.2	米重(kg/m)	0.347




配:活动角码




型号	G110BG99-140	名称	纱扇	型号	FE11999-1744	名称	格条
壁厚(mm)	1.4	米重(kg/m)	0.729	壁厚(mm)	1.2	米重(kg/m)	0.320

G110BG 系列隔热平开窗纱一体截面图


（扇、纱扇、压线、转角、辅料）

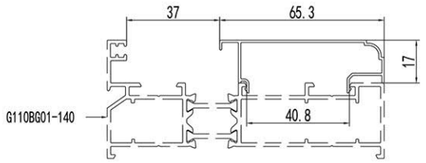


配 G110BG01-140/G110BG51-180
G110BG41-140/G110BG02-140
G110BG42-140/G110BG62-120




型号	G110BG14-090	名称	压线	型号	G110BG264-090	名称	压线
壁厚(mm)	0.9	米重(kg/m)	0.313	壁厚(mm)	0.9	米重(kg/m)	0.247

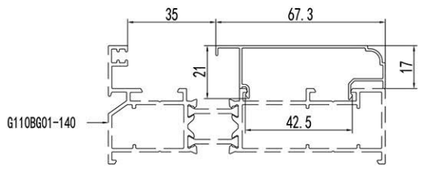


配 G110BG01-140/G110BG51-180
G110BG41-140/G110BG02-140
G110BG42-140/G110BG62-120




型号	G110BG74-090	名称	压线	型号	G110BG604-090	名称	压线
壁厚(mm)	0.9	米重(kg/m)	0.318	壁厚(mm)	0.9	米重(kg/m)	0.257

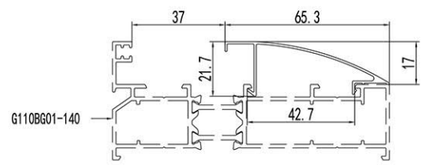


配 G110BG01-140/G110BG51-180
G110BG41-140/G110BG02-140
G110BG42-140/G110BG62-120



型号	G110BG04C-090	名称	压线	型号	G110BG554-100	名称	压线
壁厚(mm)	0.9	米重(kg/m)	0.281	壁厚(mm)	1.0	米重(kg/m)	0.165

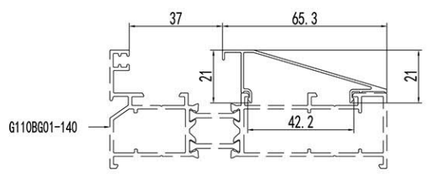


配 G110BG01-140/G110BG51-180
G110BG41-140/G110BG02-140
G110BG42-140/G110BG62-120




型号	G110BG04E-090	名称	压线	型号	G110BG584-100	名称	压线
壁厚(mm)	0.9	米重(kg/m)	0.283	壁厚(mm)	1.0	米重(kg/m)	0.362

G110BG 系列隔热平开窗纱一体截面图

（扇、纱扇、压线、转角、辅料）

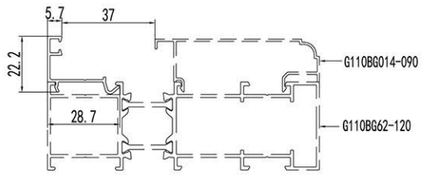


配 G110BG62-120




配 G110BG69-120D

型号	G110BG64-100	名称	压线	型号	G110BG69C-090	名称	纱压线
壁厚(mm)	1.0	米重(kg/m)	0.18	壁厚(mm)	0.9	米重(kg/m)	0.108

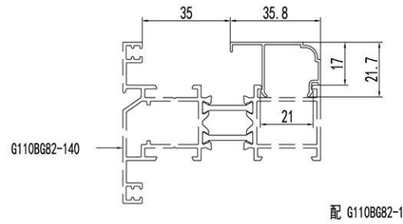


配 G110BG82-140




配 G110BG19-140
G110BG109-100

型号	G110BG84-090	名称	压线	型号	G110BG19C-080	名称	纱压线
壁厚(mm)	0.9	米重(kg/m)	0.207	壁厚(mm)	0.8	米重(kg/m)	0.102




配G110BG253-180




配 G110BG19-140
G110BG109-100

型号	G110BG254-120	名称	压线	型号	G110BG104-080	名称	纱压线
壁厚(mm)	1.2	米重(kg/m)	0.147	壁厚(mm)	0.8	米重(kg/m)	0.096



配G110BG593-140D




配 G110BG69-120D


型号	G110BG594-120	名称	压线	型号	G110BG79-100	名称	辅料
壁厚(mm)	1.2	米重(kg/m)	0.149	壁厚(mm)	1.0	米重(kg/m)	0.165

G110BG 系列隔热平开窗纱一体截面图


（扇、纱扇、压线、转角、辅料）



型号	G110BG89-100	名称	辅料	
壁厚(mm)	1.0	米重(kg/m)	0.134	




型号	G95C05	名称	盖板	
壁厚(mm)	0.7	米重(kg/m)	0.045	

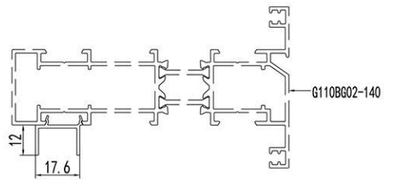

配 G110BG02-140

型号	G110BG75-120	名称	滑槽	
壁厚(mm)	1.2	米重(kg/m)	0.145	

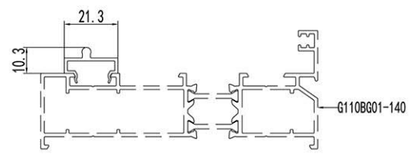



配 G110BG01-140

型号	G110BG85-120	名称	轨道	
壁厚(mm)	1.2	米重(kg/m)	0.169	


G110BG 系列隔热平开窗纱一体截面图

（扇、纱扇、压线、转角、辅料）

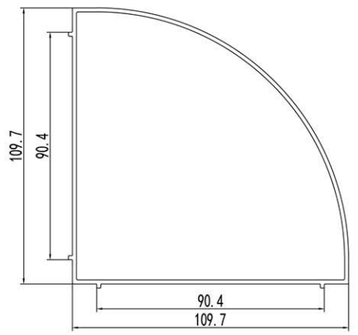

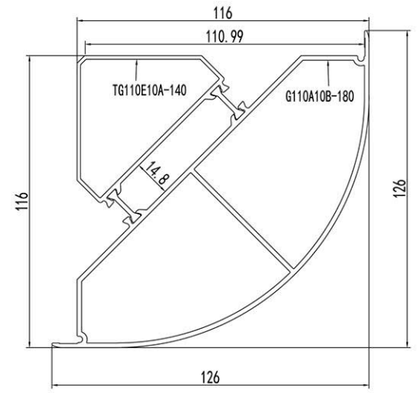



型号	TL11010-160	名称	转角	型号	G110A10-T01	名称	转角
壁厚(mm)	1.6	米重(kg/m)	1.718	壁厚(mm)	1.4	米重(kg/m)	3.121

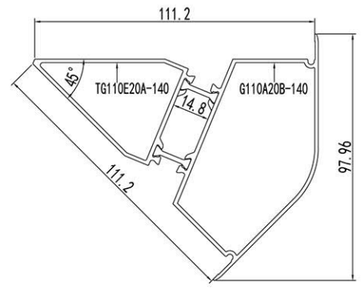


型号	G110A20-140	名称	转角	
壁厚(mm)	1.4	米重(kg/m)	1.811	

GPK115D系列隔热平开窗纱一体装配图

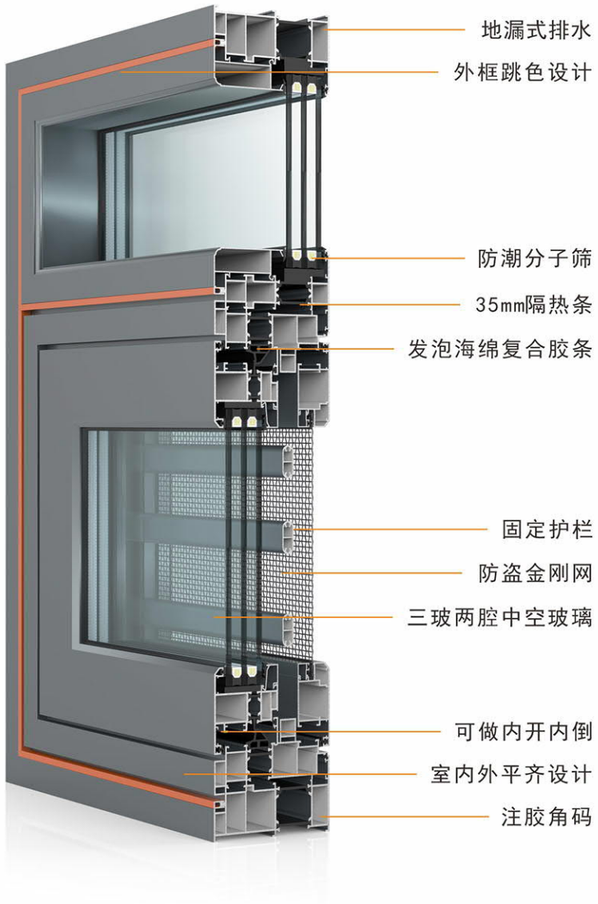

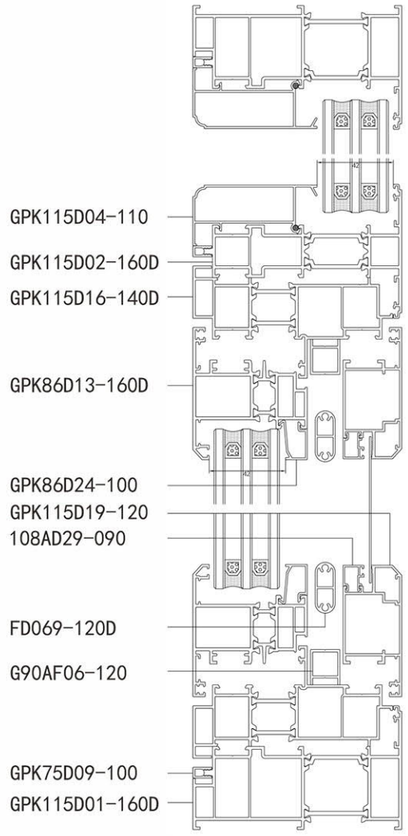


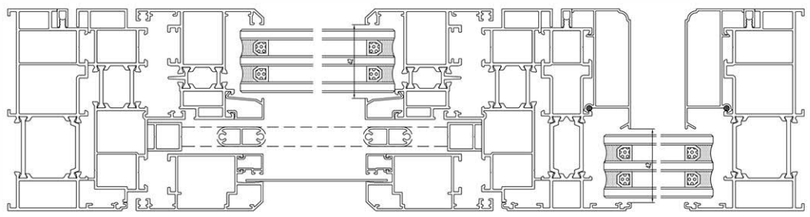


1500mm x 2000mm x 300mm单开标窗每平方用料：13.436kg/m^2(不含护栏)


GPK115D系列隔热平开窗纱一体截面图


（隔热条宽度为35mm）

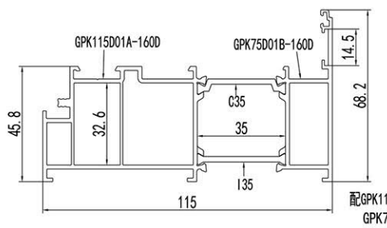

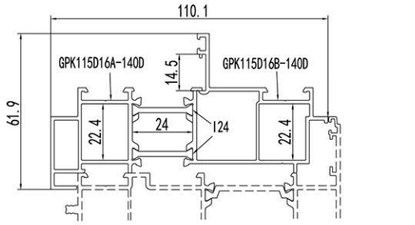



型号	GPK115D01-160D	名称	框料	型号	GPK115D16-140D	名称	附框
壁厚(mm)	1.6	米重(kg/m)	2.178	壁厚(mm)	1.4	米重(kg/m)	1.777

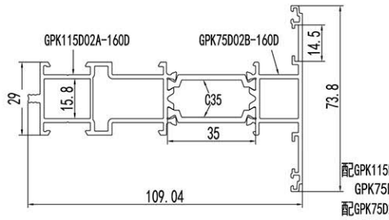





型号	GPK115D02-160D	名称	中梃	型号	GPK115D09-120	名称	纱扇
壁厚(mm)	1.6	米重(kg/m)	1.88	壁厚(mm)	1.2	米重(kg/m)	0.748

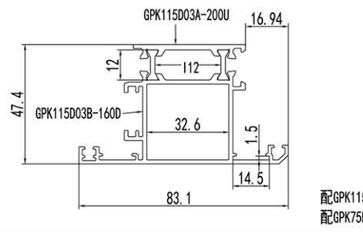

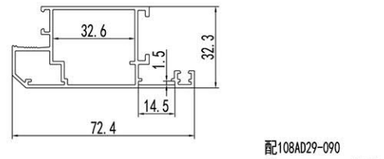

型号	GPK115D03-T01	名称	扇料	型号	GPK115D19-120	名称	纱扇
壁厚(mm)	1.6	米重(kg/m)	1.478	壁厚(mm)	1.2	米重(kg/m)	0.815

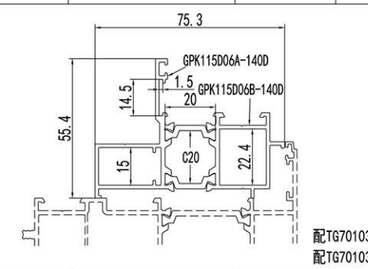


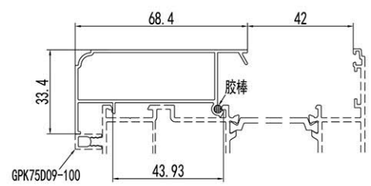


型号	GPK115D06-140D	名称	附框	型号	GPK115D04-110	名称	压线
壁厚(mm)	1.4	米重(kg/m)	1.291	壁厚(mm)	1.1	米重(kg/m)	0.569

GPK115D 系列隔热平开窗纱一体截面图


（隔热条宽度为35mm）




配GPK115D03-T01




型号	GPK115D14-120	名称	压线	型号	GPK75D19-250	名称	中梃连接件
壁厚(mm)	1.2	米重(kg/m)	0.161	壁厚(mm)	2.5	米重(kg/m)	0.947




配GPK86D24-100压线
配TG701039D-220U角码




型号	GPK86D13-160D	名称	扇料	型号	GPK75D29-220U	名称	中梃连接件
壁厚(mm)	1.6	米重(kg/m)	1.587	壁厚(mm)	2.3	米重(kg/m)	1.324




配GPK86D13-160D



型号	GPK86D24-100	名称	压线	型号	GPK75D10-220U	名称	角码
壁厚(mm)	1.0	米重(kg/m)	0.162	壁厚(mm)	2.3	米重(kg/m)	2.484







型号	GPK75D09-100	名称	辅料	型号	TG701039D-220U	名称	角码
壁厚(mm)	1.0	米重(kg/m)	0.078	壁厚(mm)	2.3	米重(kg/m)	1.742


GPK115D 系列隔热平开窗纱一体截面图


（隔热条宽度为35mm）






型号	TG701039-220U	名称	角码	型号	FE11999-1744	名称	格条
壁厚(mm)	2.3	米重(kg/m)	1.507	壁厚(mm)	1.2	米重(kg/m)	0.320






型号	108AD29-090	名称	压线	型号	FD069-120D	名称	格条
壁厚(mm)	0.9	米重(kg/m)	0.111	壁厚(mm)	1.2	米重(kg/m)	0.275



配:活动角码


型号	G110BG10-120	名称	防盗格				
壁厚(mm)	1.2	米重(kg/m)	0.347				




型号	G90AF06-120	名称	防盗格				
壁厚(mm)	1.2	米重(kg/m)	0.223				

GPK115D 系列隔热平开窗纱一体截面图


（隔热条宽度为35mm）

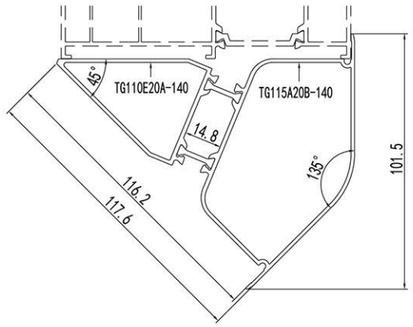

型号	TG115A20-140	名称	转角
壁厚(mm)	1.4	米重(kg/m)	1.851

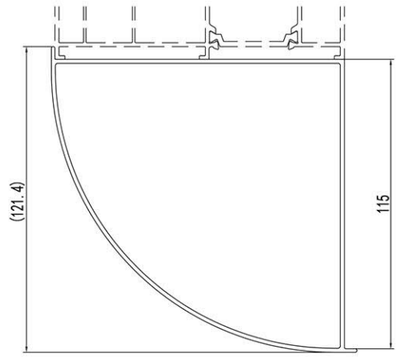



型号	GPK115E20-160	名称	转角
壁厚(mm)	1.6	米重(kg/m)	1.823

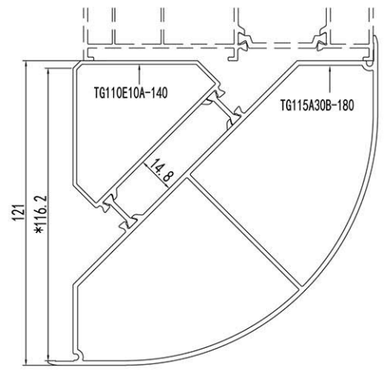


型号	TG115A30-T01	名称	转角
壁厚(mm)	*	米重(kg/m)	3.220

GPK115E 系列隔热平开窗纱一体装配图

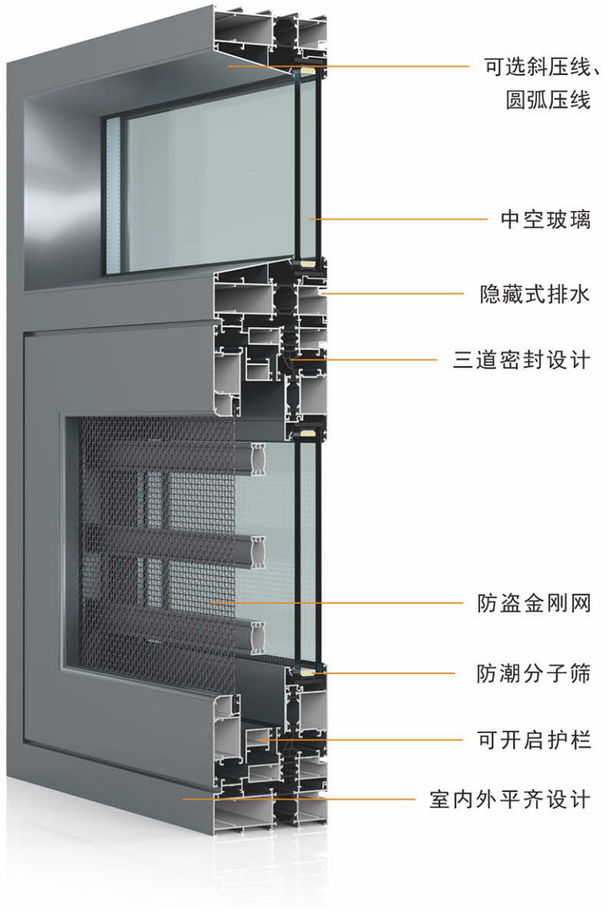

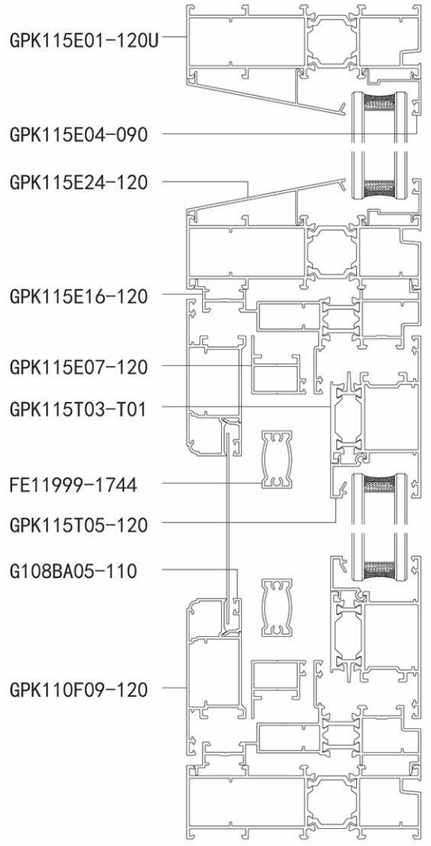


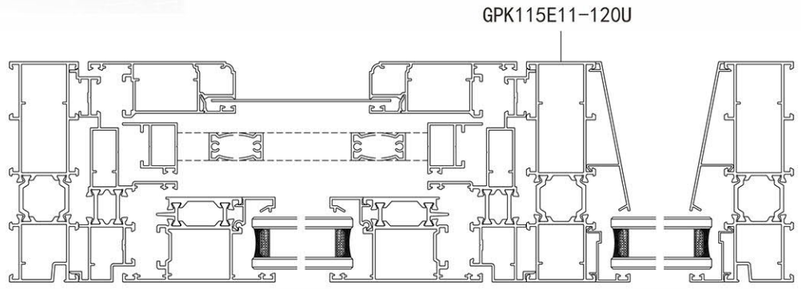


1500mm x 2000mm x 300mm单开标窗每平方用料：10.789kg/m^2(不含护栏)


GPK115E 系列隔热平开窗纱一体截面图


（隔热条宽度为24mm）

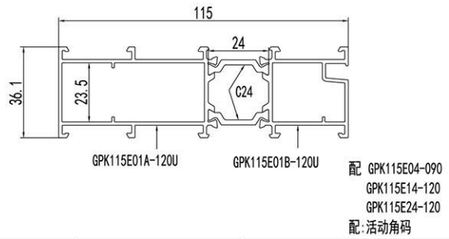




型号	GPK115E01-120U	名称	框料	型号	GPK115E26-120	名称	附框
壁厚(mm)	1.3	米重(kg/m)	1.646	壁厚(mm)	1.2	米重(kg/m)	1.154

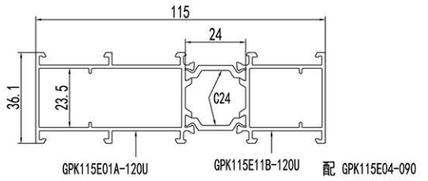





配:活动角码

型号	GPK115E11-120U	名称	框料	型号	GPK115E07-120	名称	防盗格
壁厚(mm)	1.3	米重(kg/m)	1.613	壁厚(mm)	1.2	米重(kg/m)	0.342






型号	GPK115E06-120	名称	附框	型号	GPK115E04-090	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.705	壁厚(mm)	0.9	米重(kg/m)	0.167




配:活动角码

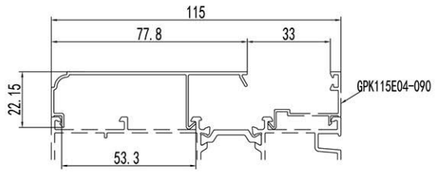


型号	GPK115E16-120	名称	附框	型号	GPK115E14-120	名称	压线
壁厚(mm)	1.2	米重(kg/m)	1.392	壁厚(mm)	1.2	米重(kg/m)	0.379


GPK115E 系列隔热平开窗纱一体截面图

（隔热条宽度为24mm）

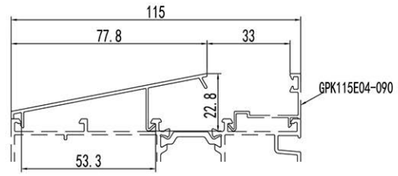




型号	GPK115E24-120	名称	压线	型号	G108BA05-110	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.335	壁厚(mm)	1.1	米重(kg/m)	0.100




配 GPK115T05-120
配 TG70T08-350角码




配:活动角码

型号	GPK115T03-T01	名称	扇料	型号	G90AF06-120	名称	防盗格
壁厚(mm)	1.4	米重(kg/m)	1.337	壁厚(mm)	1.2	米重(kg/m)	0.223




配 G108BA05-110 压线
配:活动角码




型号	FE11999-1744	名称	格条
壁厚(mm)	1.2	米重(kg/m)	0.320

型号	GPK110F09-120	名称	纱扇
壁厚(mm)	1.2	米重(kg/m)	0.777




配 GPK115T03-T01

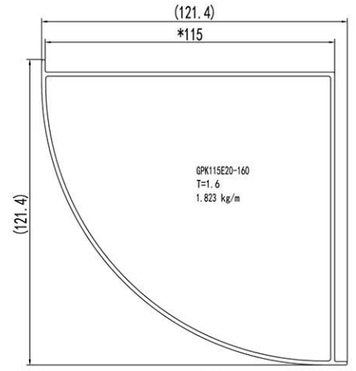


型号	GPK115T05-120	名称	压线	型号	GPK115E20-160	名称	转角
壁厚(mm)	1.2	米重(kg/m)	0.180	壁厚(mm)	1.6	米重(kg/m)	1.823

GPK115E 系列隔热平开窗纱一体截面图

（隔热条宽度为24mm）

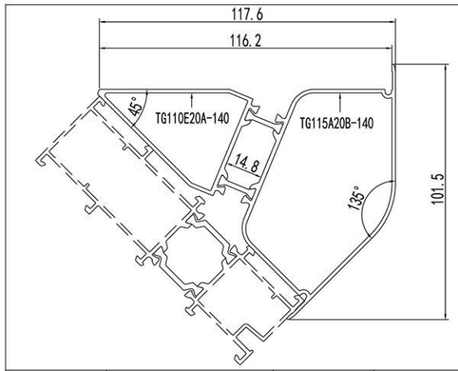


型号	TG115A20-140	名称	转角	
壁厚(mm)	1.4	米重(kg/m)	1.851	

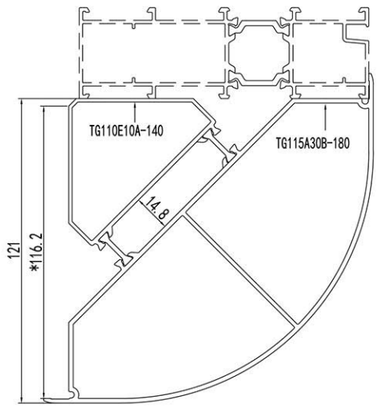



型号	TG115A30-T01	名称	转角	
壁厚(mm)	*	米重(kg/m)	3.220	

JGP110 系列隔热平开窗纱一体装配图

（T=1.8幕墙款）

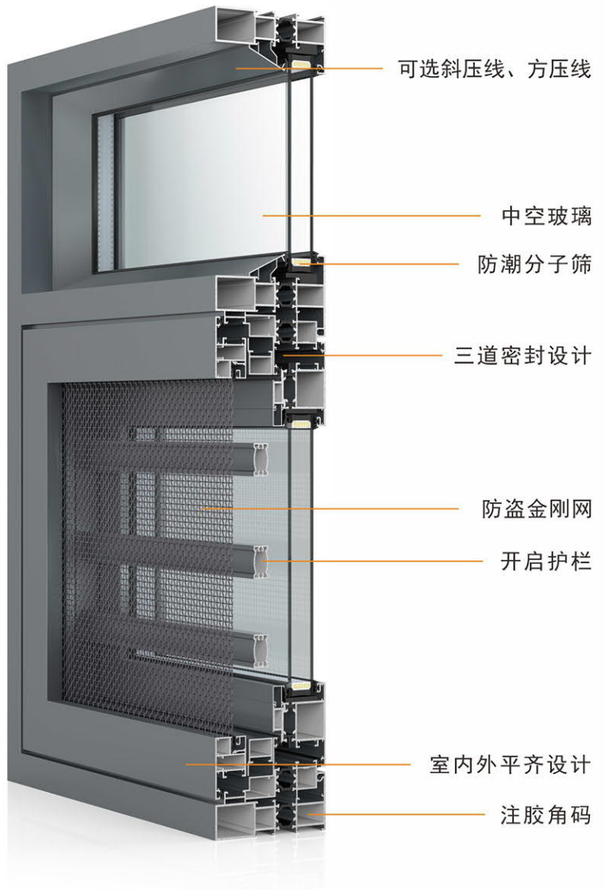

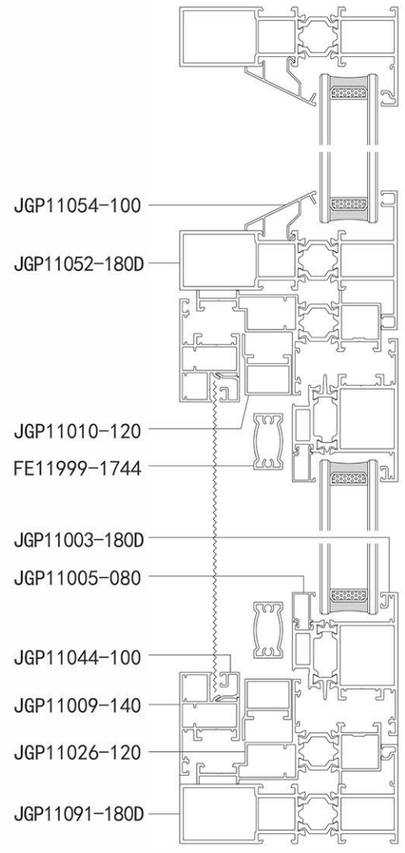


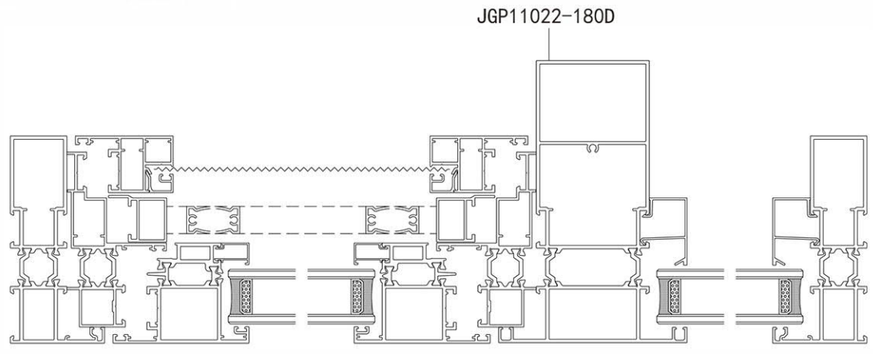

1500mm x 2000mm x 300mm单开标窗每平方用料：10.789kg/m²(不含护栏)


JGP110 系列隔热平开窗纱一体截面图

（T=1.3幕墙款 隔热条宽度为20mm）

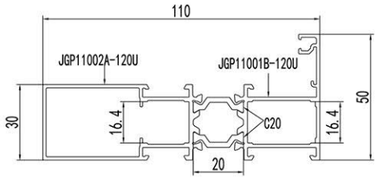


配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP11001-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.616

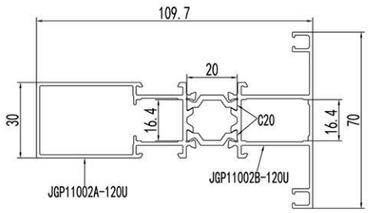


配JGP11004-100压线/JGP11054-100压线

型号	JGP11002-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.721

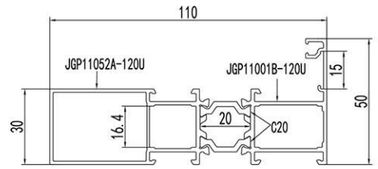


配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP11091-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.65

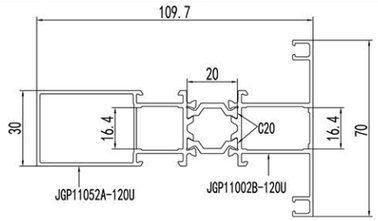


配JGP11004-100压线/JGP11054-100压线

型号	JGP11052-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.754

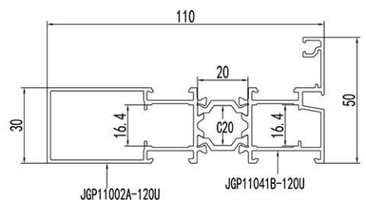


配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP110101-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.663

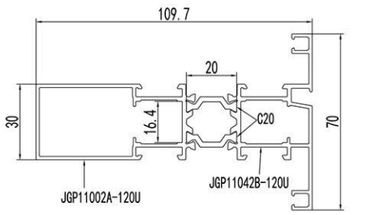


配JGP11004-100压线/JGP11054-100压线

型号	JGP110102-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.786

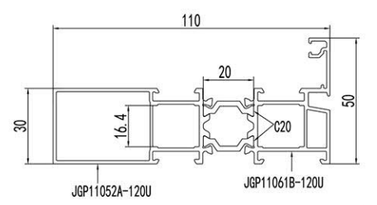

配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP110301-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.731

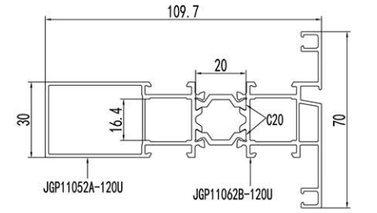


配JGP11004-100压线/JGP11054-100压线

型号	JGP110302-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.854


JGP110 系列隔热平开窗纱一体截面图

（T=1.3幕墙款 隔热条宽度为20mm）

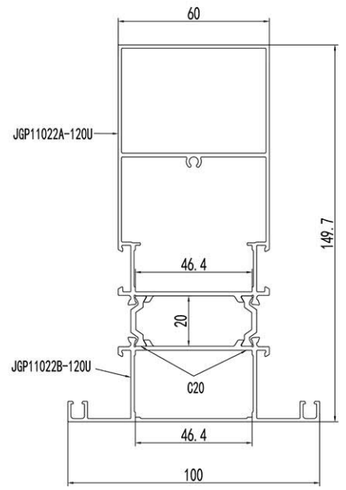


配JGP11004-100压线/JGP11054-100压线

型号	JGP11022-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	2.738



配JGP11005-080压线
配:活动角码

型号	JGP11003-120U	名称	扇料
壁厚(mm)	1.3	米重(kg/m)	1.391




配:活动角码

型号	JGP11013-T01	名称	扇料
壁厚(mm)	1.3	米重(kg/m)	1.308


JGP110 系列隔热平开窗纱一体截面图

（T=1.3常规款 隔热条宽度为20mm）

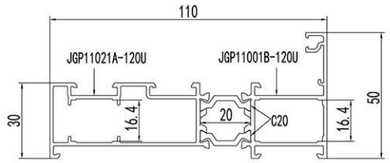


配:活动角码
配JGP11014-100压线/JGP11024-120压线
JGP11004-100压线/JGP11054-100压线

型号	JGP11021-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.638

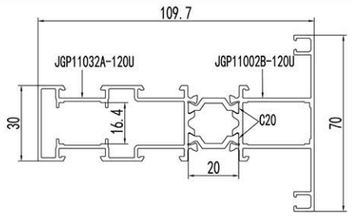


配JGP11014-100压线/JGP11024-120压线
JGP11004-100压线/JGP11054-100压线

型号	JGP11032-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.836

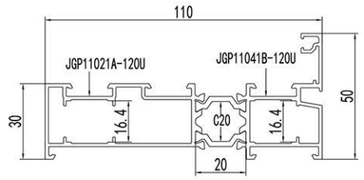


配:活动角码
配JGP11014-100压线/JGP11024-120压线
JGP11004-100压线/JGP11054-100压线

型号	JGP11041-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.685

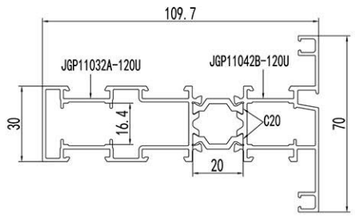


配JGP11014-100压线/JGP11024-120压线
JGP11004-100压线/JGP11054-100压线

型号	JGP11042-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.902

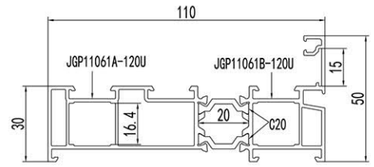


配:活动角码
配JGP11014-100压线/JGP11024-120压线
JGP11004-100压线/JGP11054-100压线

型号	JGP11061-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.786

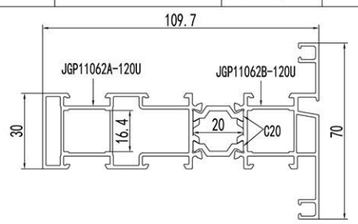


配JGP11014-100压线/JGP11024-120压线
JGP11004-100压线/JGP11054-100压线

型号	JGP11062-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	2.003

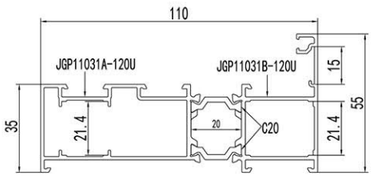

配:活动角码
配JGP11014-100压线/JGP11024-120压线
JGP11004-100压线/JGP11054-100压线

型号	JGP11031-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.717

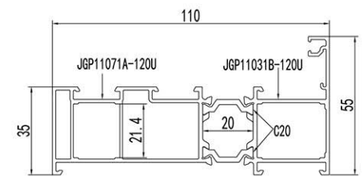


配:活动角码
配JGP11014-100压线/JGP11024-120压线
JGP11004-100压线/JGP11054-100压线

型号	JGP11071-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.812

JGP110 系列隔热平开窗纱一体截面图

（T=1.3常规款 隔热条宽度为20mm）




配JGP11004-100压线
JGP11054-100压线

型号	JGP11072-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.489


JGP110 系列隔热平开窗纱一体截面图

（T=1.8幕墙款 隔热条宽度为20mm）

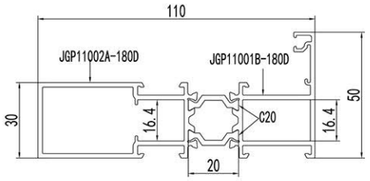


配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP11001-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	1.911

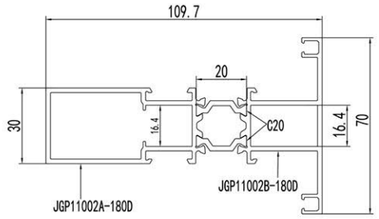


配JGP11004-100压线/JGP11054-100压线

型号	JGP11002-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.022

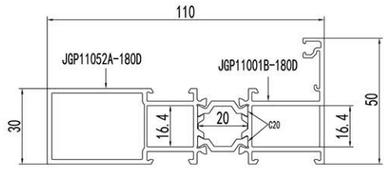


配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP11091-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	1.946

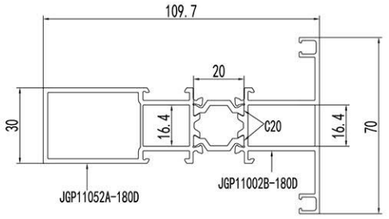


配JGP11004-100压线/JGP11054-100压线

型号	JGP11052-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.056

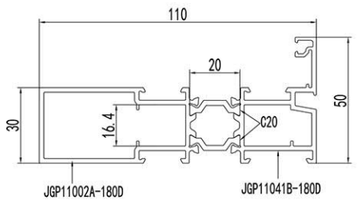


配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP110201-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	1.958

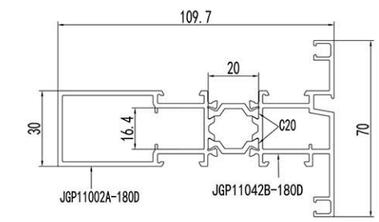


配JGP11004-100压线/JGP11054-100压线

型号	JGP110202-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.096

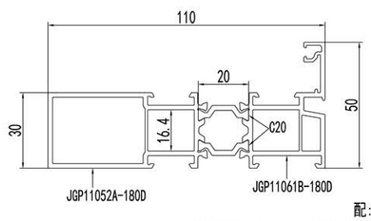

配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP110301-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.026

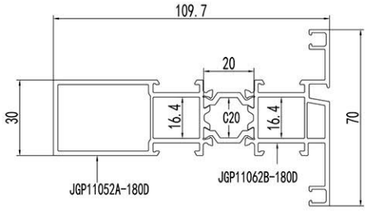


配JGP11004-100压线/JGP11054-100压线

型号	JGP110302-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.164


JGP110 系列隔热平开窗纱一体截面图

（T=1.8幕墙款 隔热条宽度为20mm）

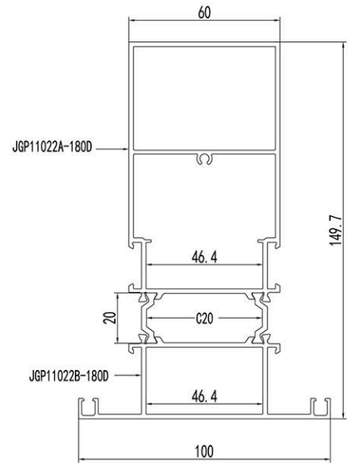


配JGP11004-100压线/JGP11054-100压线

型号	JGP11022-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	3.258



配JGP11005-080压线
配:活动角码

型号	JGP11003-180D	名称	扇料
壁厚(mm)	1.8	米重(kg/m)	1.538




配:活动角码

型号	JGP11023-T01	名称	扇料
壁厚(mm)	1.8	米重(kg/m)	1.425


JGP110 系列隔热平开窗纱一体截面图

（T=1.8常规款 隔热条宽度为20mm）

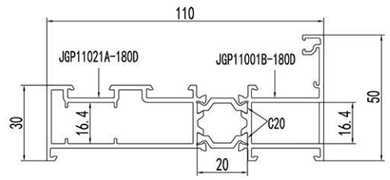


配:活动角码
配JGP11014-100压线/JGP11024-120压线

型号	JGP11021-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	1.929

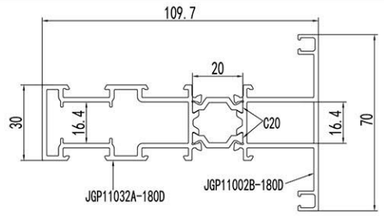


配JGP11014-100压线/JGP11024-120压线

型号	JGP11032-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.157

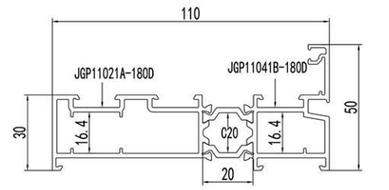


配:活动角码
配JGP11014-100压线/JGP11024-120压线

型号	JGP11041-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	1.976

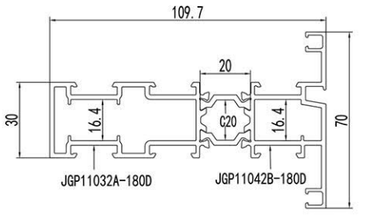


配JGP11014-100压线/JGP11024-120压线

型号	JGP11042-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.231

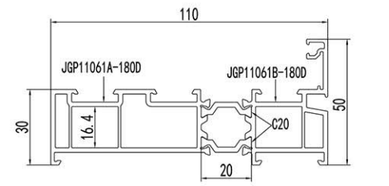


配:活动角码
配JGP11014-100压线/JGP11024-120压线

型号	JGP11061-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.077

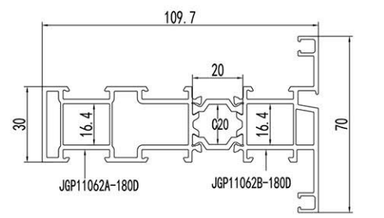


配JGP11014-100压线/JGP11024-120压线

型号	JGP11062-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.333

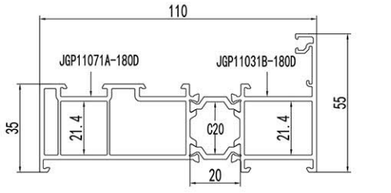

配:活动角码
配JGP11014-100压线/JGP11024-120压线

型号	JGP11071-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.118

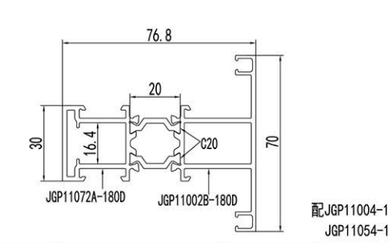


配JGP11004-100压线
JGP11054-100压线

型号	JGP11072-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	1.701


JGP110 系列隔热平开窗纱一体截面图

（纱扇、压线、辅料 隔热条宽度为20mm）




配:活动角码

型号	JGP11006-120	名称	附框
壁厚(mm)	1.2	米重(kg/m)	1.141




配 JGP11039-120 压线
配:活动角码

型号	JGP11029-120	名称	纱扇
壁厚(mm)	1.2	米重(kg/m)	0.663




配:活动角码

型号	JGP11026-120	名称	附框
壁厚(mm)	1.2	米重(kg/m)	1.29




配 JGP11044-100 压线
配:活动角码

型号	JGP11049-120	名称	纱扇
壁厚(mm)	1.2	米重(kg/m)	0.779

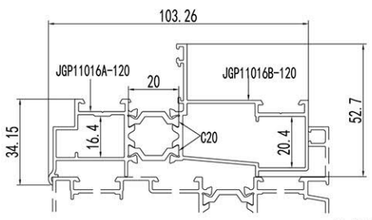


配:活动角码


型号	JGP11016-120	名称	附框
壁厚(mm)	1.2	米重(kg/m)	1.439

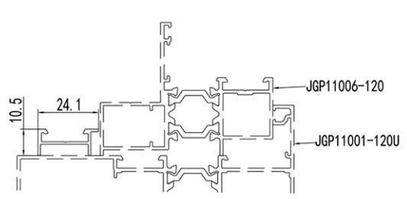

型号	JGP11036-100	名称	辅料
壁厚(mm)	1.0	米重(kg/m)	0.140



配 JGP11044-100 压线
配:活动角码

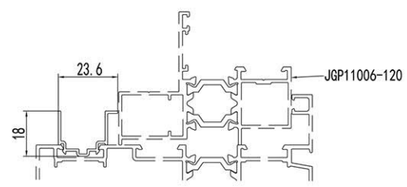



型号	JGP11009-140	名称	纱扇
壁厚(mm)	1.4	米重(kg/m)	0.670

型号	JGP11046-090	名称	辅料
壁厚(mm)	0.9	米重(kg/m)	0.155


JGP110 系列隔热平开窗纱一体截面图


（纱扇、压线、辅料 隔热条宽度为20mm）

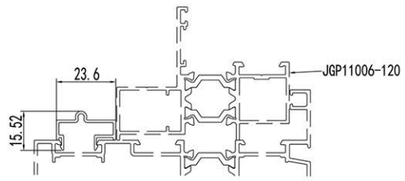

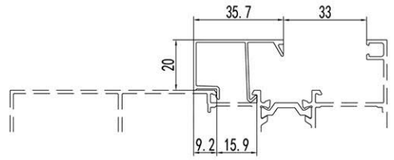


型号	JGP11034-100	名称	辅料	型号	JGP11004-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.165	壁厚(mm)	1.0	米重(kg/m)	0.275




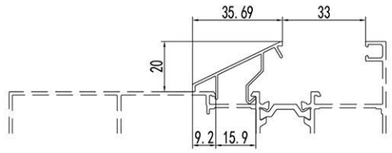


型号	JGP11044-100	名称	压线	型号	JGP11054-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.122	壁厚(mm)	1.0	米重(kg/m)	0.204




配 JGP11029-120



型号	JGP11039-120	名称	压线	型号	JGP11014-100	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.097	壁厚(mm)	1.0	米重(kg/m)	0.291




配JGP11003-120U




型号	JGP11005-080	名称	压线	型号	JGP11064-100	名称	压线
壁厚(mm)	0.8	米重(kg/m)	0.108	壁厚(mm)	1.0	米重(kg/m)	0.280


JGP110 系列隔热平开窗纱一体截面图

（纱扇、压线、辅料 隔热条宽度为20mm）






型号	JGP11024-120	名称	压线	型号	G95C15A-090	名称	盖板
壁厚(mm)	1.2	米重(kg/m)	0.397	壁厚(mm)	0.9	米重(kg/m)	0.052




型号	JGP11074-100	名称	压线				
壁厚(mm)	1.0	米重(kg/m)	0.356				



配:活动角码


型号	JGP11010-120	名称	防盗格				
壁厚(mm)	1.2	米重(kg/m)	0.335				





型号	FE11999-1744	名称	格条				
壁厚(mm)	1.2	米重(kg/m)	0.320				

JGP125系列隔热平开窗纱一体装配图

（T=1.8常规款）

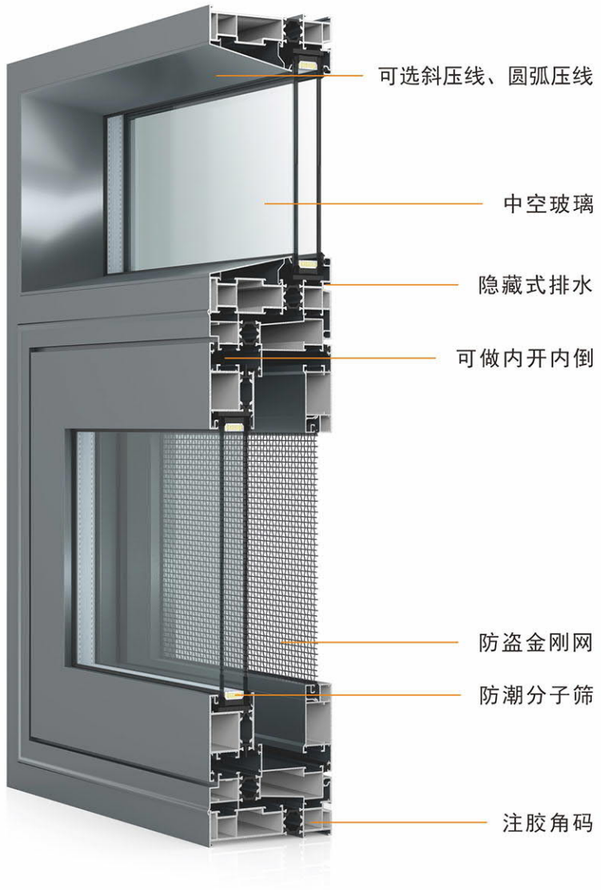

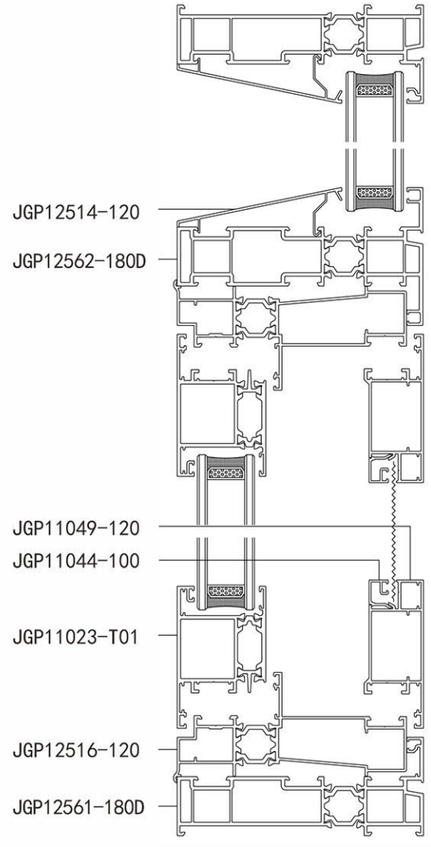


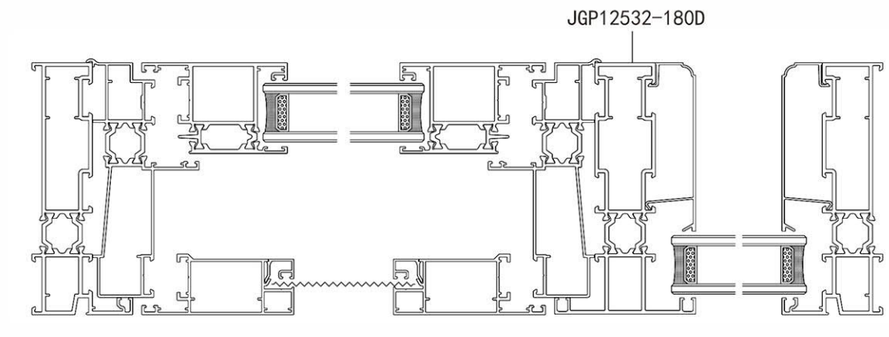

1500mm x 2000mm x 300mm单开标窗每平方用料：12.340kg/m^2(不含护栏)


JGP125系列隔热平开窗纱一体截面图

（T=1.3幕墙款 隔热条宽度为20mm）

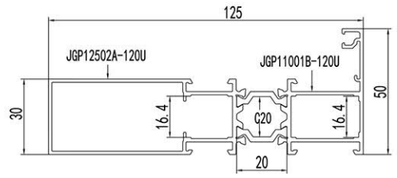


配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP12501-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.722

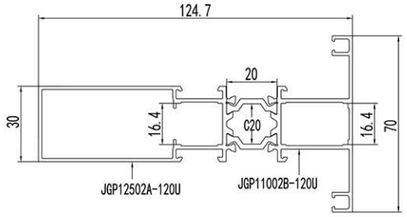


配JGP11004-100压线/JGP11054-100压线

型号	JGP12502-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.826

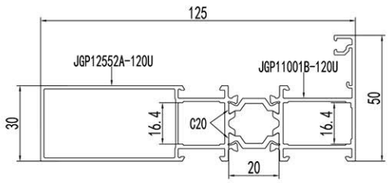


配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP12591-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.756

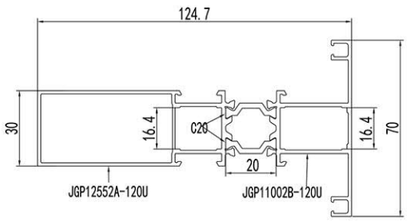


配JGP11004-100压线/JGP11054-100压线

型号	JGP12552-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.86

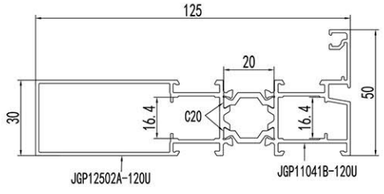


配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP125161-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.769

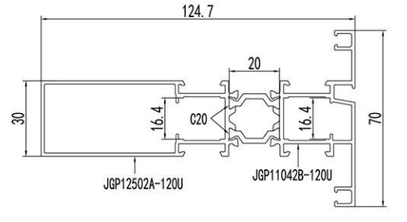


配JGP11004-100压线/JGP11054-100压线

型号	JGP125162-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.892

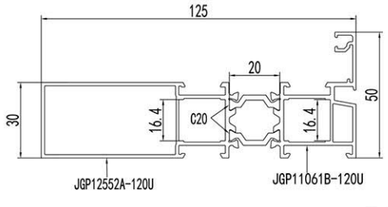

配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP125171-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.837

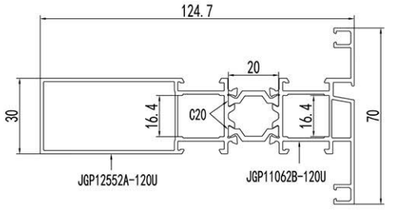


配JGP11004-100压线/JGP11054-100压线

型号	JGP125172-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.959


JGP125系列隔热平开窗纱一体截面图

（T=1.3常规款 隔热条宽度为20mm）

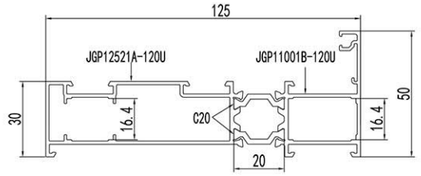


配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP12521-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.743

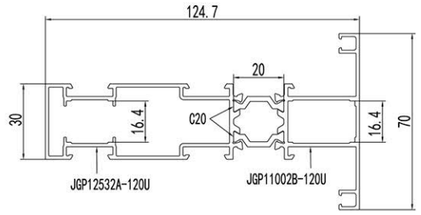


配JGP12514-120压线/JGP12524-120压线

型号	JGP12532-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.941

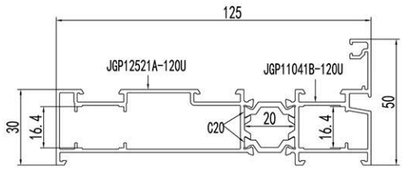


配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP12541-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.79

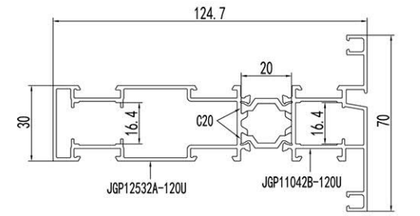


配JGP12514-120压线/JGP12524-120压线

型号	JGP12542-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	2.007

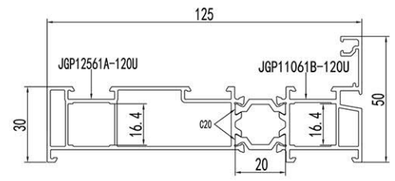


配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP12561-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.892

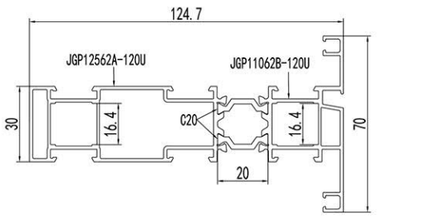


配JGP12514-120压线/JGP12524-120压线

型号	JGP12562-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	2.109

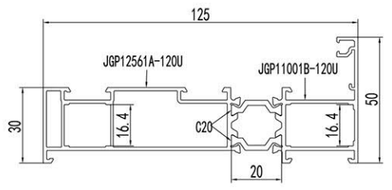

配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP125101-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.811

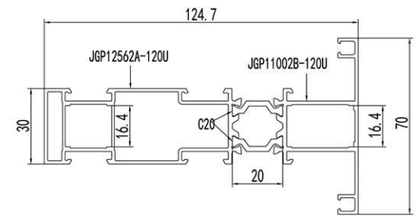


配JGP12514-120压线/JGP12524-120压线

型号	JGP12592-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	2.009


JGP125系列隔热平开窗纱一体截面图

（T=1.3常规款 隔热条宽度为20mm）

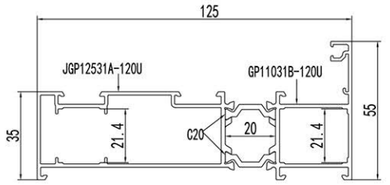


配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP12531-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.823

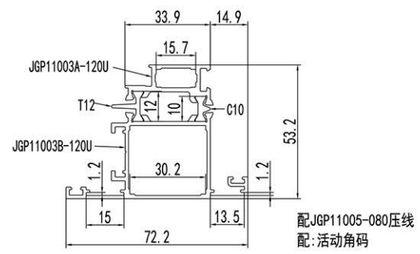


配JGP11005-080压线
配:活动角码

型号	JGP11003-120U	名称	扇料
壁厚(mm)	1.3	米重(kg/m)	1.391

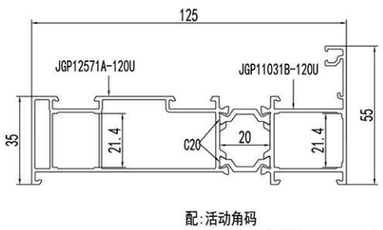


配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP12571-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.916

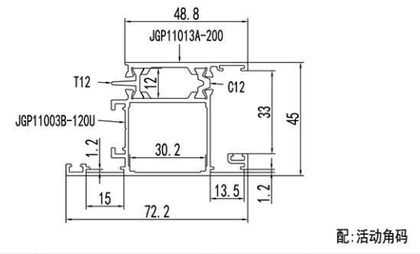

配:活动角码

型号	JGP11013-T01	名称	扇料
壁厚(mm)	1.3	米重(kg/m)	1.308




配JGP11004-100压线
JGP11054-100压线

型号	JGP11072-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.489


JGP125系列隔热平开窗纱一体截面图

（T=1.8幕墙款 隔热条宽度为20mm）

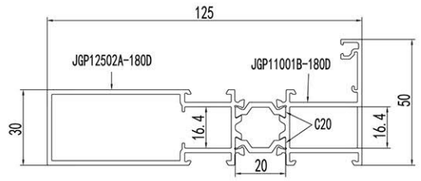


配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP12501-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.058

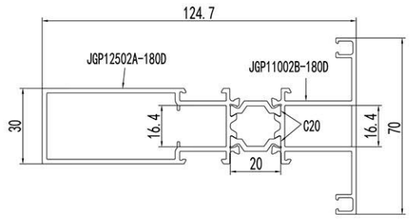


配JGP11004-100压线/JGP11054-100压线

型号	JGP12502-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.167

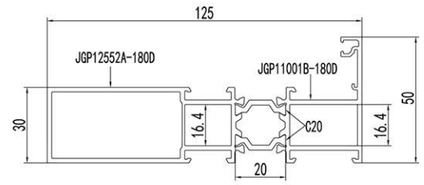


配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP12591-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.092

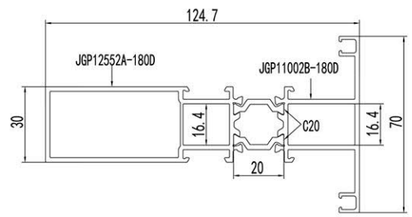


配JGP11004-100压线/JGP11054-100压线

型号	JGP12552-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.203

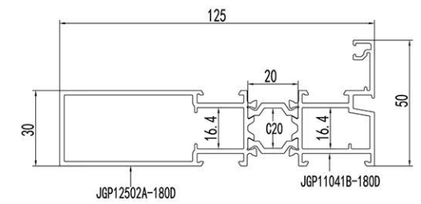


配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP125131-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.104

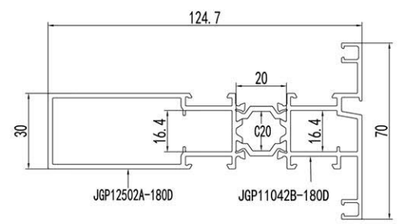


配JGP11004-100压线/JGP11054-100压线

型号	JGP125152-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.241

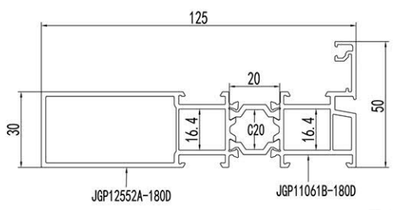

配:活动角码
配JGP11004-100压线/JGP11054-100压线

型号	JGP125141-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.172

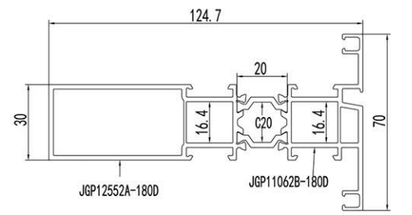


配JGP11004-100压线/JGP11054-100压线

型号	JGP125152-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.241


JGP125系列隔热平开窗纱一体截面图

（T=1.8幕墙款 隔热条宽度为20mm）

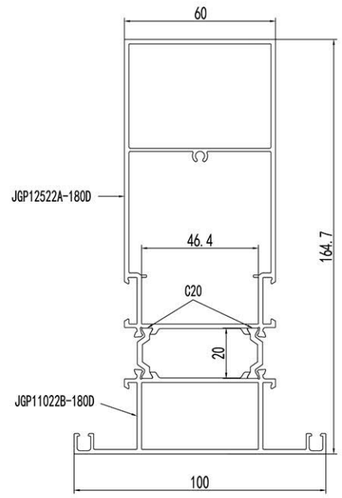


配JGP11004-100压线/JGP11054-100压线

型号	JGP12522-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	3.359

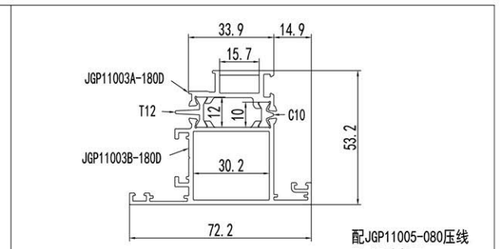


配JGP11005-080压线
配:活动角码

型号	JGP11003-180D	名称	扇料
壁厚(mm)	1.8	米重(kg/m)	1.538




配:活动角码

型号	JGP11023-T01	名称	扇料
壁厚(mm)	1.8	米重(kg/m)	1.425

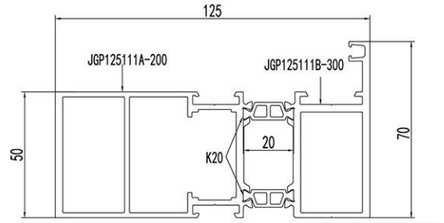

配 JGP12544-140 压线
配:活动角码

型号	JGP125111-T01	名称	框料
壁厚(mm)	2.0/3.0	米重(kg/m)	3.572

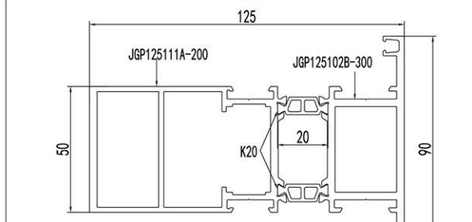


配 JGP12544-140 压线
配:活动角码

型号	JGP125102-T01	名称	中梃
壁厚(mm)	2.0/3.0	米重(kg/m)	3.85


JGP125系列隔热平开窗纱一体截面图

（T=1.8常规款 隔热条宽度为20mm）

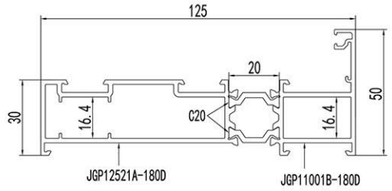


配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP12521-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.076

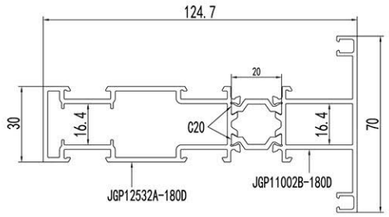


配JGP12514-120压线/JGP12524-120压线

型号	JGP12532-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.303

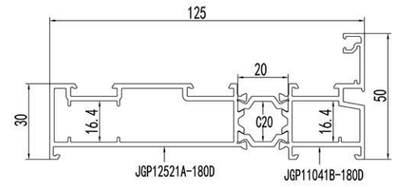


配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP12541-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.122

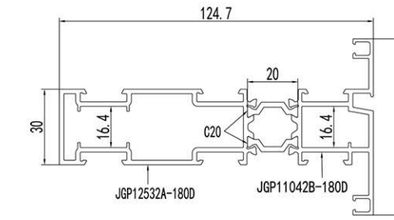


配JGP12514-120压线/JGP12524-120压线

型号	JGP12542-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.377

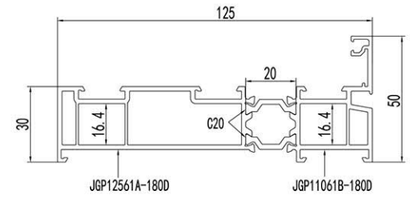


配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP12561-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.223

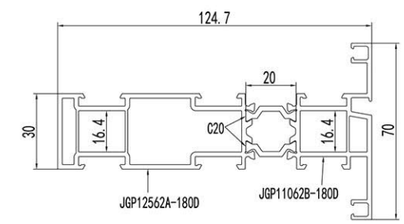


配JGP12514-120压线/JGP12524-120压线

型号	JGP12562-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.479

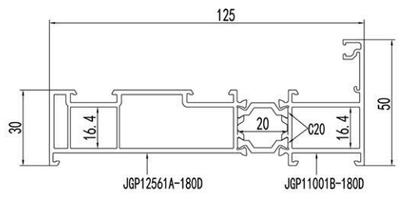

配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP125101-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.142

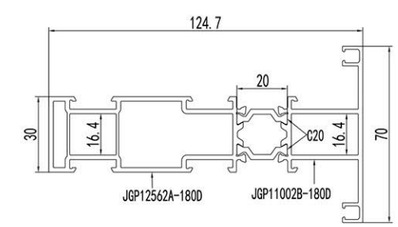


配JGP12514-120压线/JGP12524-120压线

型号	JGP12592-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.372


JGP125系列隔热平开窗纱一体截面图

（T=1.8常规款 隔热条宽度为20mm）

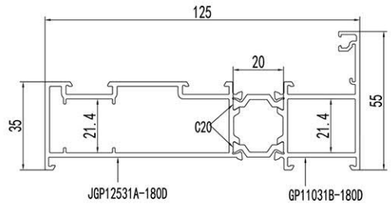


配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP12531-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.173

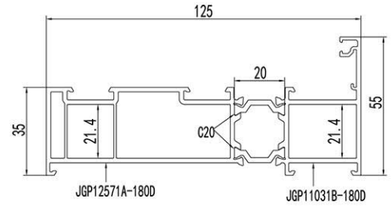


配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP12571-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.264



配JGP11004-100压线
JGP11054-100压线

型号	JGP11072-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	1.701

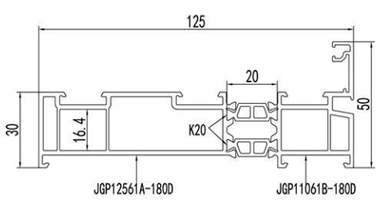


配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP125121-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.266


JGP125系列隔热平开窗纱一体截面图

（T=2.2常规款 隔热条宽度为20mm）

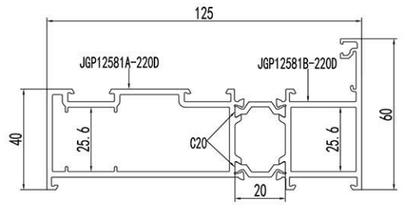


配:活动角码
配JGP12514-120压线/JGP12524-120压线

型号	JGP12581-220D	名称	框料
壁厚(mm)	2.2	米重(kg/m)	2.663

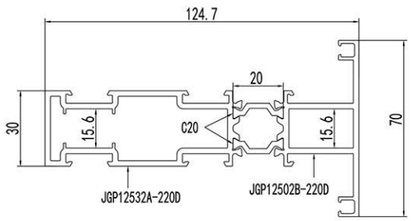

配JGP12514-120压线/JGP12524-120压线

型号	JGP12532-220D	名称	中梃
壁厚(mm)	2.2	米重(kg/m)	2.684




配JGP11005-080压线
配:活动角码

型号	JGP12503-T01	名称	扇料
壁厚(mm)	1.8/2.2	米重(kg/m)	1.938


JGP125系列隔热平开窗纱一体截面图

（纱扇、压线、辅料 隔热条宽度为20mm）

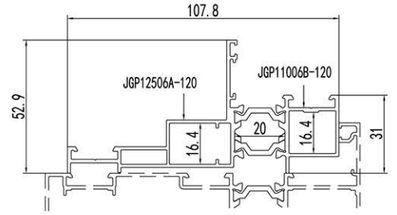


配:活动角码

型号	JGP12506-120	名称	附框
壁厚(mm)	1.2	米重(kg/m)	1.403

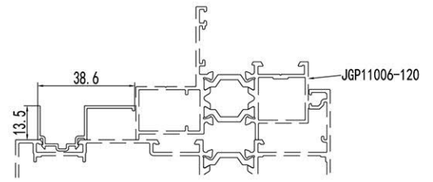


型号	JGP12526-100	名称	辅料
壁厚(mm)	1.0	米重(kg/m)	0.198

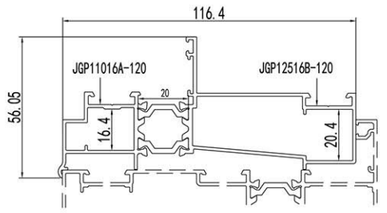


配:活动角码

型号	JGP12516-120	名称	附框
壁厚(mm)	1.2	米重(kg/m)	1.538

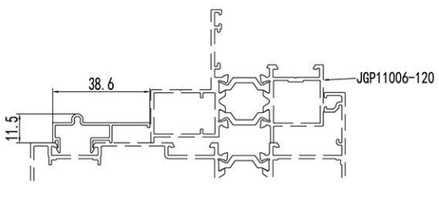


型号	JGP12534-100	名称	辅料
壁厚(mm)	1.0	米重(kg/m)	0.208

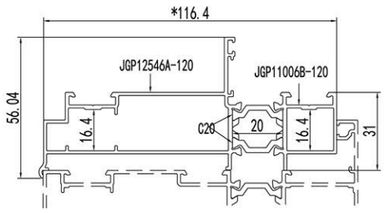


配:活动角码


型号	JGP12546-120	名称	附框
壁厚(mm)	1.2	米重(kg/m)	1.537

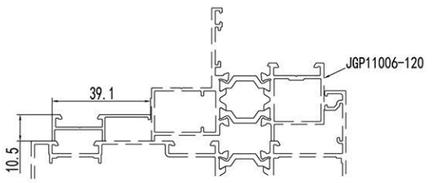

型号	JGP12536-100	名称	辅料
壁厚(mm)	1.0	米重(kg/m)	0.183



型号	JGP12508-220D	名称	门槛
壁厚(mm)	2.2	米重(kg/m)	1.309




配 JGP11044-100 压线
配:活动角码


型号	JGP11009-140	名称	纱扇
壁厚(mm)	1.4	米重(kg/m)	0.670

JGP125系列隔热平开窗纱一体截面图

（纱扇、压线、辅料 隔热条宽度为20mm）




配 JGP11039-120 压线
配:活动角码




配JGP11003-120U


型号	JGP11029-120	名称	纱扇	型号	JGP11005-080	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.663	壁厚(mm)	0.8	米重(kg/m)	0.108




配 JGP11044-100 压线
配:活动角码

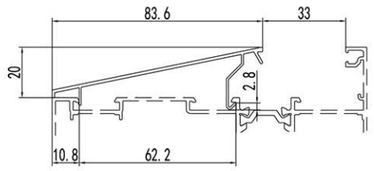


型号	JGP11049-120	名称	纱扇	型号	JGP12514-120	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.779	壁厚(mm)	1.2	米重(kg/m)	0.374




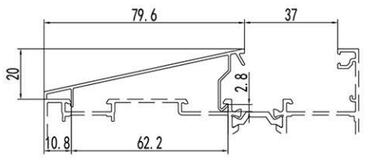

型号	JGP11044-100	名称	压线	型号	JGP12554-110	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.122	壁厚(mm)	1.1	米重(kg/m)	0.341




配 JGP11029-120

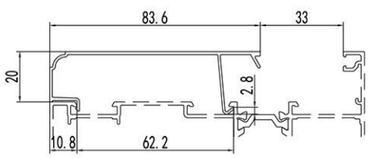


型号	JGP11039-120	名称	压线	型号	JGP12524-120	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.097	壁厚(mm)	1.2	米重(kg/m)	0.444

JGP125系列隔热平开窗纱一体截面图


（纱扇、压线、辅料 隔热条宽度为20mm）

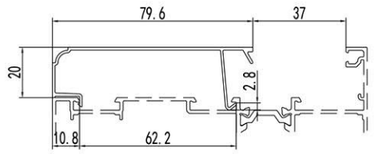





配:活动角码


型号	JGP12564-110	名称	压线	型号	JGP11010-120	名称	防盗格
壁厚(mm)	1.1	米重(kg/m)	0.413	壁厚(mm)	1.2	米重(kg/m)	0.335







型号	JGP12544-140	名称	压线	型号	FE11999-1744	名称	格条
壁厚(mm)	1.4	米重(kg/m)	0.375	壁厚(mm)	1.2	米重(kg/m)	0.320

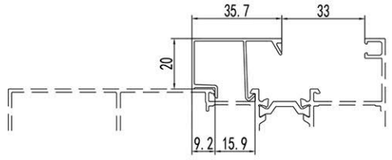



型号	JGP11004-100	名称	压线	型号	G95C15A-090	名称	盖板
壁厚(mm)	1.0	米重(kg/m)	0.275	壁厚(mm)	0.9	米重(kg/m)	0.052

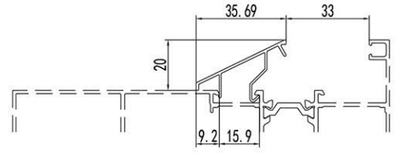

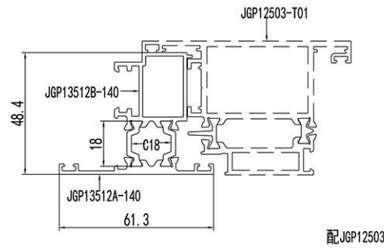


配JGP12503-T01

型号	JGP11054-100	名称	压线	型号	JGP13512-140	名称	假中梃
壁厚(mm)	1.0	米重(kg/m)	0.204	壁厚(mm)	1.4	米重(kg/m)	1.131


JGP125系列隔热平开窗纱一体截面图

（纱扇、压线、辅料 隔热条宽度为20mm）




配 JGP11049-120

型号	JGP13552-120	名称	假中梃
壁厚(mm)	1.2	米重(kg/m)	0.421




配 JGP11049-120

型号	JGP13558-120	名称	纱窗封边
壁厚(mm)	1.2	米重(kg/m)	0.109




配 JGP12503-T01

型号	JGP13528-120	名称	外开门封边
壁厚(mm)	1.2	米重(kg/m)	0.537



配 JGP12503-T01

型号	JGP13548-120	名称	外开门封边
壁厚(mm)	1.2	米重(kg/m)	0.284





配 JGP11049-120


型号	JGP13538-120	名称	纱窗封边
壁厚(mm)	1.2	米重(kg/m)	0.317

JGP135系列隔热平开窗纱一体装配图

（T=2.2）

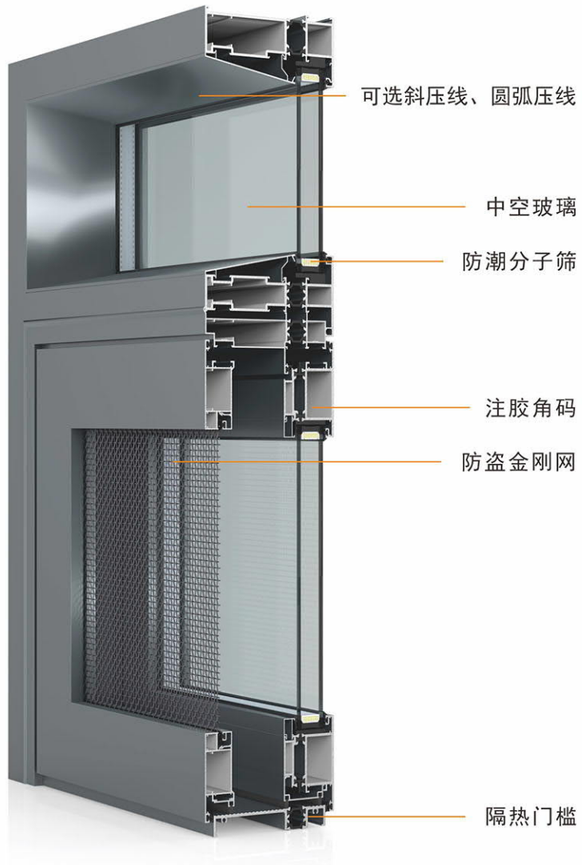

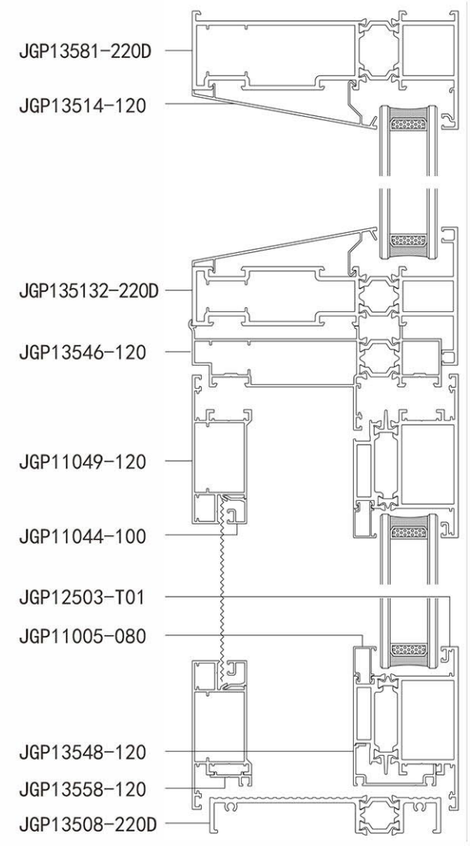


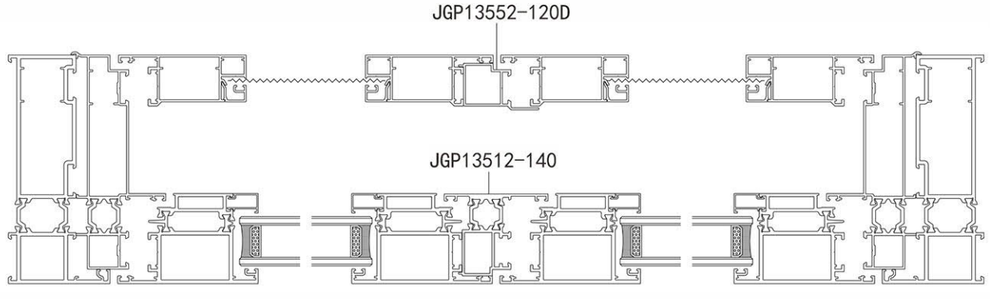

2500mm x 2000mm x 400mm单开标窗每平方用料：16.205kg/m^2(不含护栏)


JGP135系列隔热平开窗纱一体截面图

（T=1.8 隔热条宽度为20mm）

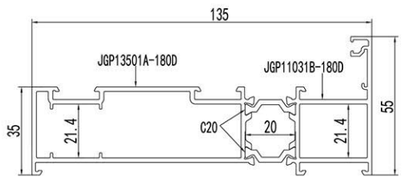


配:活动角码
配JGP13514-120压线/JGP13524-120压线

型号	JGP13501-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.271

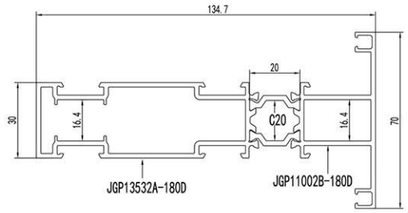


配JGP13514-120压线/JGP13524-120压线

型号	JGP13532-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.401

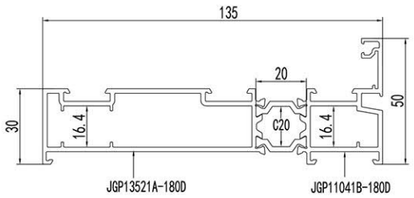


配:活动角码
配JGP13514-120压线/JGP13524-120压线

型号	JGP13521-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.220

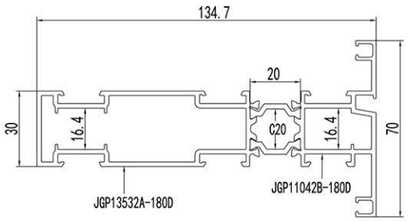


配JGP13514-120压线/JGP13524-120压线

型号	JGP13542-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.475

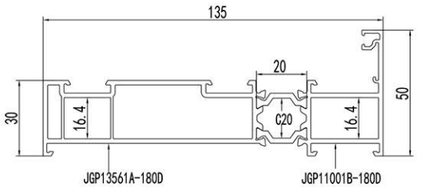


配:活动角码
配JGP13514-120压线/JGP13524-120压线

型号	JGP135101-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.240

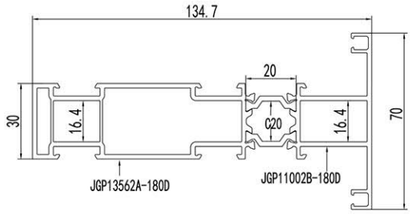


配JGP13514-120压线/JGP13524-120压线

型号	JGP13592-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.470

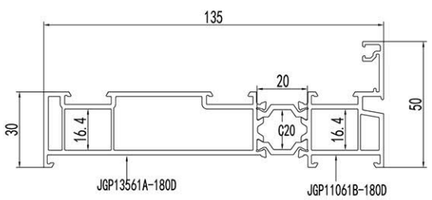

配:活动角码
配JGP13514-120压线/JGP13524-120压线

型号	JGP13561-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.322

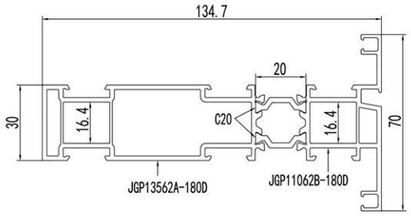


配JGP13514-120压线/JGP13524-120压线

型号	JGP13562-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.577


JGP135系列隔热平开窗纱一体截面图

（T=1.8 隔热条宽度为20mm）

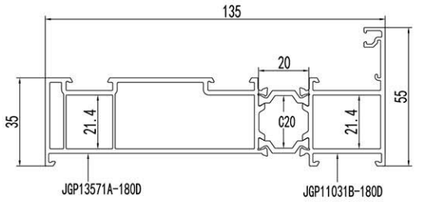


配:活动角码
配JGP13514-120压线/JGP13524-120压线

型号	JGP13571-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.366

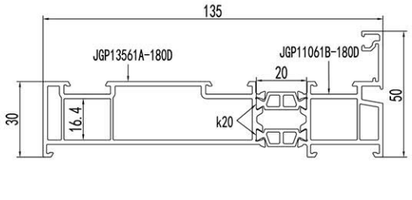


配:活动角码
配JGP13514-120压线/JGP13524-120压线

型号	JGP135111-180D	名称	框料
壁厚(mm)	1.8	米重(kg/m)	2.365

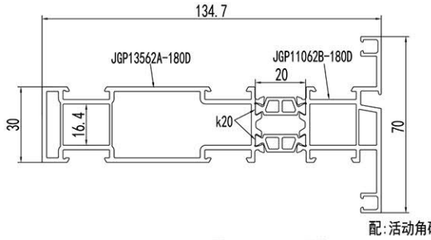


配:活动角码
配JGP13514-120压线/JGP13524-120压线

型号	JGP135102-180D	名称	中梃
壁厚(mm)	1.8	米重(kg/m)	2.620



配JGP11005-080压线
配:活动角码

型号	JGP11003-180D	名称	扇料
壁厚(mm)	1.8	米重(kg/m)	1.538

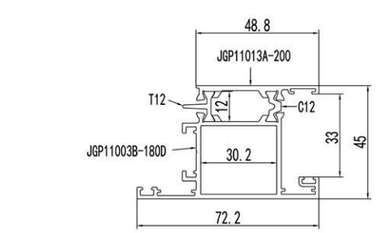


配:活动角码

型号	JGP11023-T01	名称	扇料
壁厚(mm)	1.8	米重(kg/m)	1.425


JGP135系列隔热平开窗纱一体截面图

（T=2.2 隔热条宽度为20mm）

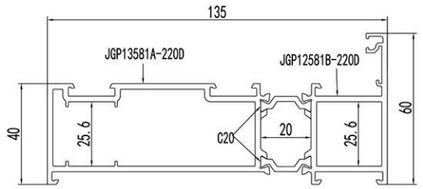


配:活动角码
配JGP13514-120压线/JGP13524-120压线

型号	JGP13581-220D	名称	框料
壁厚(mm)	2.2	米重(kg/m)	2.782

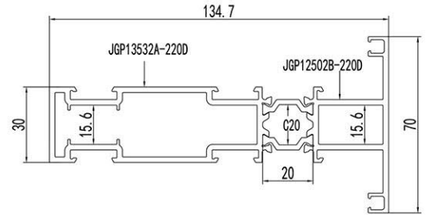

配JGP13514-120压线/JGP13524-120压线

型号	JGP135132-220D	名称	中梃
壁厚(mm)	2.2	米重(kg/m)	2.803




配JGP11005-080压线
配:活动角码

型号	JGP12503-T01	名称	扇料
壁厚(mm)	1.8/2.2	米重(kg/m)	1.938


JGP135系列隔热平开窗纱一体截面图

（纱扇、压线、辅料 隔热条宽度为20mm）

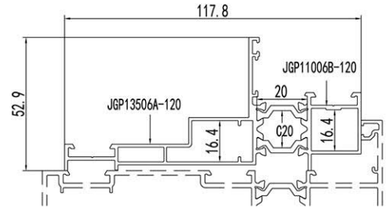


配:活动角码

型号	JGP13506-120	名称	附框
壁厚(mm)	1.2	米重(kg/m)	1.468




配 JGP11039-120 压线
配:活动角码

型号	JGP11029-120	名称	纱扇
壁厚(mm)	1.2	米重(kg/m)	0.663

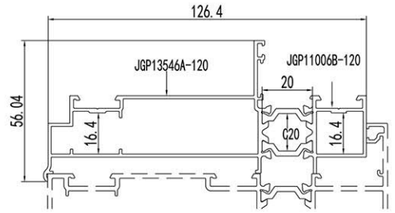


配:活动角码

型号	JGP13546-120	名称	附框
壁厚(mm)	1.2	米重(kg/m)	1.602




配 JGP11044-100 压线
配:活动角码


型号	JGP11049-120	名称	纱扇
壁厚(mm)	1.2	米重(kg/m)	0.779




型号	JGP13508-220D	名称	门槛
壁厚(mm)	2.2	米重(kg/m)	1.377



型号	JGP11044-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.122



配 JGP11044-100 压线
配:活动角码




配 JGP11029-120

型号	JGP11009-140	名称	纱扇
壁厚(mm)	1.4	米重(kg/m)	0.670

型号	JGP11039-120	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.097


JGP135系列隔热平开窗纱一体截面图

（纱扇、压线、辅料 隔热条宽度为20mm）




配JGP11003-120U


型号	JGP11005-080	名称	压线
壁厚(mm)	0.8	米重(kg/m)	0.108




型号	JGP13544-120	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.464




型号	JGP13514-120	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.407

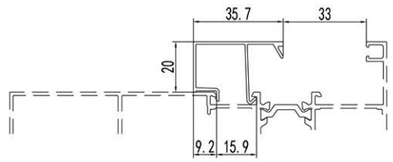


型号	JGP11004-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.275

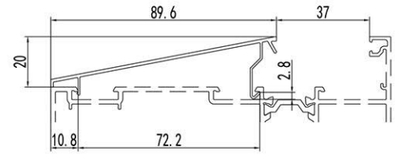


型号	JGP13534-120	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.393

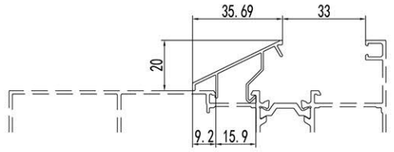

型号	JGP11054-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.204




型号	JGP13524-120	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.477



型号	G95C15A-090	名称	盖板
壁厚(mm)	0.9	米重(kg/m)	0.052


JGP135系列隔热平开窗纱一体截面图

（纱扇、压线、辅料 隔热条宽度为20mm）




配:活动角码

型号	JGP11010-120	名称	防盗格
壁厚(mm)	1.2	米重(kg/m)	0.335




型号	FE11999-1744	名称	格条
壁厚(mm)	1.2	米重(kg/m)	0.320

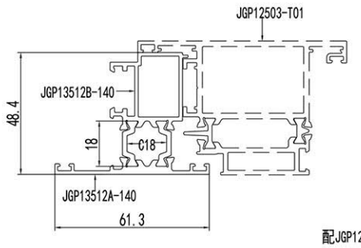


配JGP12503-T01

型号	JGP13512-140	名称	假中梃
壁厚(mm)	1.4	米重(kg/m)	1.131




配 JGP11049-120

型号	JGP13552-120	名称	假中梃
壁厚(mm)	1.2	米重(kg/m)	0.421




配 JGP12503-T01

型号	JGP13528-120	名称	外开门封边
壁厚(mm)	1.2	米重(kg/m)	0.537




配 JGP12503-T01

型号	JGP13548-120	名称	外开门封边
壁厚(mm)	1.2	米重(kg/m)	0.284



配 JGP11049-120

型号	JGP13538-120	名称	纱窗封边
壁厚(mm)	1.2	米重(kg/m)	0.317



配 JGP11049-120

型号	JGP13558-120	名称	纱窗封边
壁厚(mm)	1.2	米重(kg/m)	0.109





平开门窗系列


“三性”高 功能齐全 易制作

- 凤铝平开窗，标配凤铝铝型材，采用原厂胶条、品牌五金，手感舒适，开窗顺畅。
- 采用汽车级复合胶条，密封性好，产品功能齐全，多样化开启方式，型材通用性强，可满足不同场景及客户使用需求。

PK76K 系列平开窗纱一体装配图

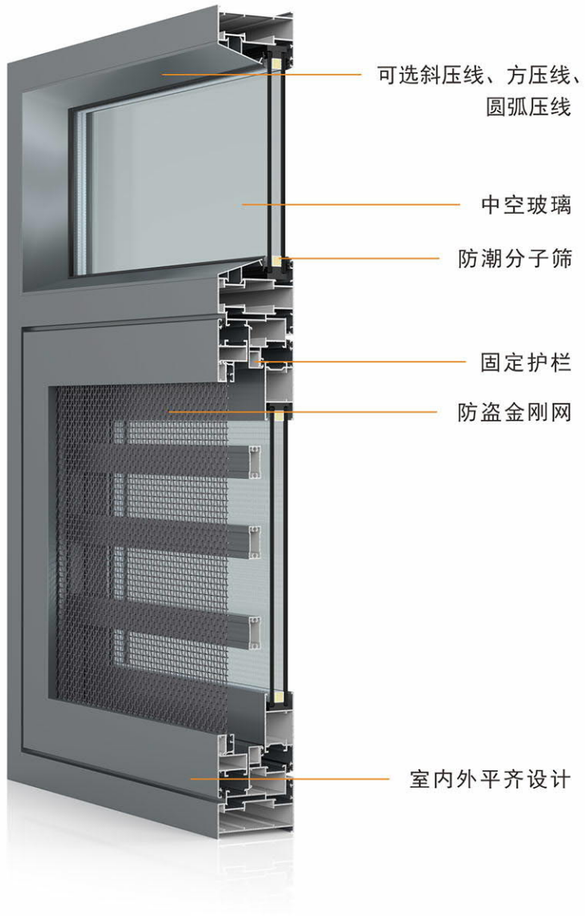


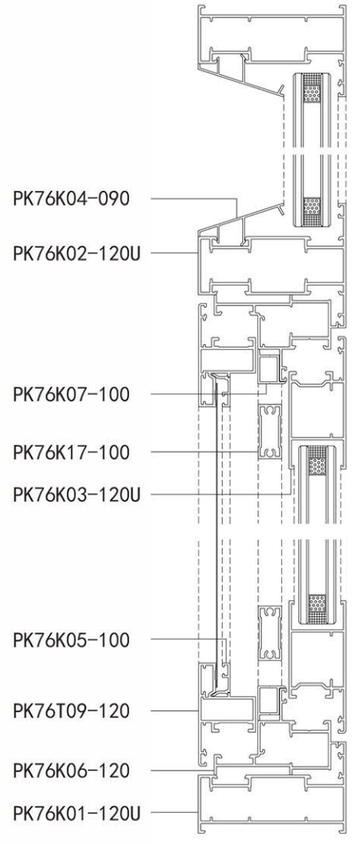

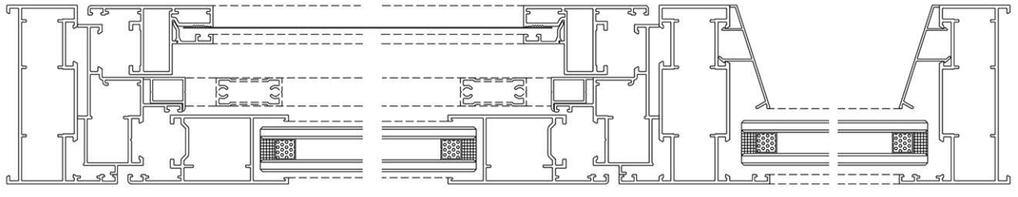


1500mm x 2000mm x 300mm单开标窗每平方用料：5.928kg/m^2(不含护栏)

PK76K 系列平开窗纱一体截面图




配:活动角码
配 PK76K04-090 压线




配:活动角码

型号	PK76K01-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	0.95

型号	PK76K13-120U	名称	扇料
壁厚(mm)	1.3	米重(kg/m)	0.696




配:活动角码
配 PK76K04-090 压线



配:活动角码

型号	PK76K02-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.095

型号	PK76K43-120U	名称	扇料
壁厚(mm)	1.3	米重(kg/m)	0.759




配:活动角码




型号	PK76K06-120	名称	附框
壁厚(mm)	1.2	米重(kg/m)	0.679

型号	PK76K07-100	名称	防盗框
壁厚(mm)	1.0	米重(kg/m)	0.145




配:活动角码




型号	PK76K03-120U	名称	扇料
壁厚(mm)	1.3	米重(kg/m)	0.692

型号	PK76K17-100	名称	防盗格
壁厚(mm)	1.0	米重(kg/m)	0.264

PK76K 系列平开窗纱一体截面图







配 PK76K09-120

型号	PK76K04-090	名称	框压线
壁厚(mm)	0.9	米重(kg/m)	0.186

型号	PK76K05-100	名称	纱压线
壁厚(mm)	1.0	米重(kg/m)	0.094







配PK76K05-100压线
配:活动角码

型号	PK76K44-100	名称	框压线
壁厚(mm)	1.0	米重(kg/m)	0.266

型号	PK88T09-120U	名称	纱扇
壁厚(mm)	1.3	米重(kg/m)	0.753






配 PK76K05-100压线
配:活动角码


型号	PK76K34-100	名称	框压线
壁厚(mm)	1.0	米重(kg/m)	0.352

型号	PK76T09-120	名称	纱扇
壁厚(mm)	1.2	米重(kg/m)	0.596




型号	PK76K54-100	名称	框压线
壁厚(mm)	1.0	米重(kg/m)	0.276


PK76K 系列平开窗纱一体截面图

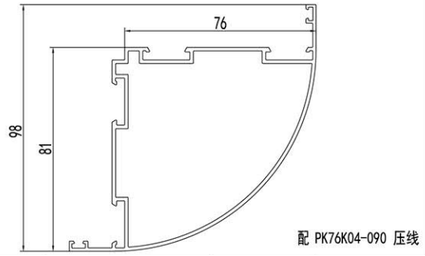

型号	PK76K10-140	名称	转角
壁厚(mm)	1.4	米重(kg/m)	1.417





型号	78910B	名称	转角
壁厚(mm)	1.2	米重(kg/m)	0.88




型号	87910	名称	转角
壁厚(mm)	1.0	米重(kg/m)	0.866

PK88T 系列平开窗纱一体装配图

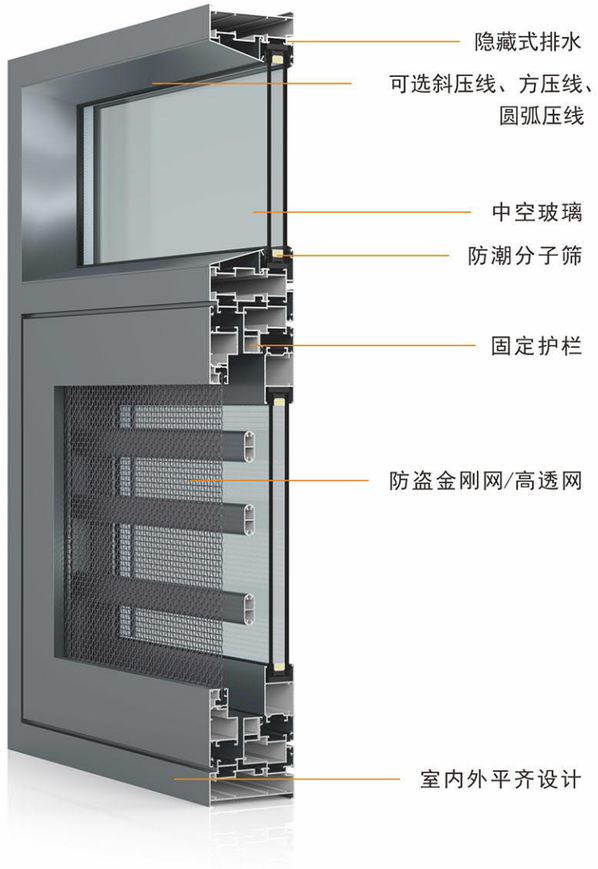


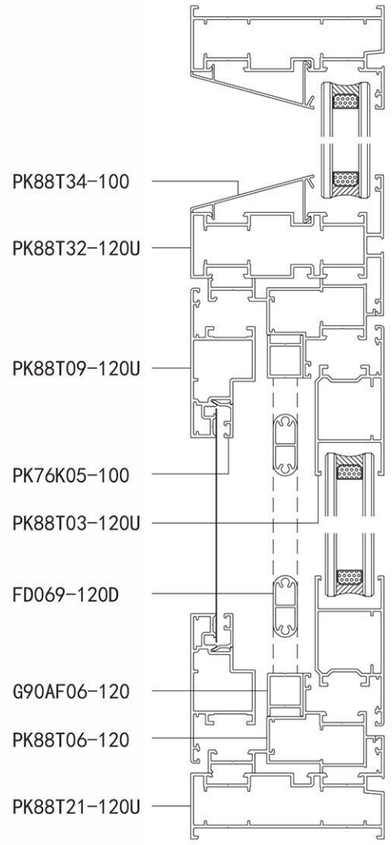

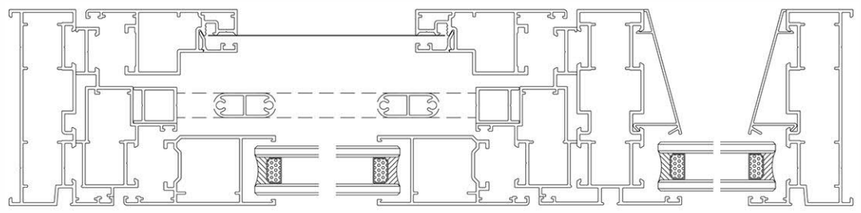


1500mm x 2000mm x 300mm单开标窗每平方用料：6.949kg/m²(不含护栏)

PK88T 系列平开窗纱一体截面图




配PK88T04-100
PK88T14-100

型号	PK88T01-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	0.765




配PK88T04-100
PK88T14-100

型号	PK88T32-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.336




配PK88T04-100
PK88T14-100

型号	PK88T11-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	0.825




配 PK88T14-100 压线
配:活动角码

型号	PK88T71-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.109




配PK88T04-100
PK88T14-100
配:活动角码

型号	PK88T21-120U	名称	框料
壁厚(mm)	1.3	米重(kg/m)	1.111




配 PK88T14-100 压线

型号	PK88T72-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.302



配PK88T04-100
PK88T14-100


型号	PK88T02-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.354



配 PK88T14-100 压线


型号	PK88T82-120U	名称	中梃
壁厚(mm)	1.3	米重(kg/m)	1.309

PK88T 系列平开窗纱一体截面图




配:活动角码

型号	PK88T06-120	名称	附框
壁厚(mm)	1.2	米重(kg/m)	0.788




型号	PK88T04-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.355




配:活动角码

型号	PK88T03-120U	名称	扇料
壁厚(mm)	1.3	米重(kg/m)	0.701




型号	PK88T14-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.310




配:活动角码

型号	PK88T13-120U	名称	扇料
壁厚(mm)	1.3	米重(kg/m)	0.753




型号	PK88T24-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.280




配PK76K05-100压线
配:活动角码


型号	PK88T09-120U	名称	纱扇
壁厚(mm)	1.3	米重(kg/m)	0.753




型号	PK88T34-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.244


PK88T系列平开窗纱一体截面图






型号	PK88T54-100	名称	压线	型号	FD069-120D	名称	格条
壁厚(mm)	1.0	米重(kg/m)	0.349	壁厚(mm)	1.2	米重(kg/m)	0.275







型号	PK88T64-100	名称	压线	型号	88810	名称	转角
壁厚(mm)	1.0	米重(kg/m)	0.304	壁厚(mm)	1.2	米重(kg/m)	0.863




配PK76K09-120



型号	PK76K05-100	名称	压线	型号	88810W	名称	转角
壁厚(mm)	1.0	米重(kg/m)	0.094	壁厚(mm)	1.1	米重(kg/m)	0.912





型号	G90AF06-120	名称	防盗格	型号	82810	名称	转角
壁厚(mm)	1.2	米重(kg/m)	0.223	壁厚(mm)	1.2	米重(kg/m)	1.007





推拉窗系列


隐藏排水 推拉顺畅 防雨水倒灌

- 凤铝推拉窗，精选凤铝断桥铝型材，采用嵌入式框包扇设计，搭接处配置全方位硅化毛条，整窗密封性能突出，防水、防风、防噪音。
- 斜体高低轨设计，配置304不锈钢轨道，推拉顺滑静音，强度高、耐磨损。
- 中间收口位置装有胶条，缓冲吸振，避免窗扇与五金磁撞。
- 带晾衣架功能，更显人性化，美观实用，节省家居空间。

GTL108A系列隔热推拉窗装配图

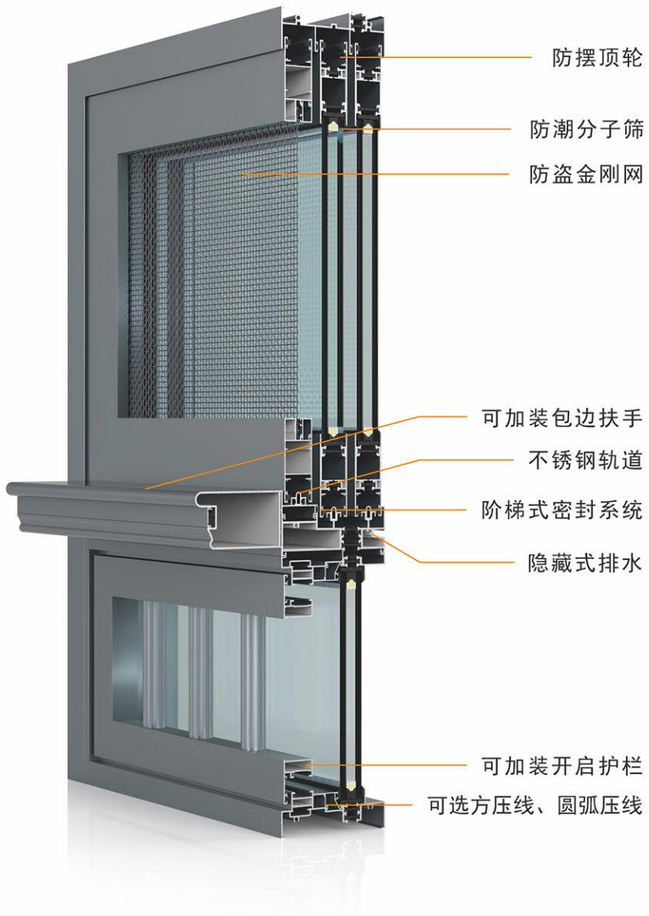

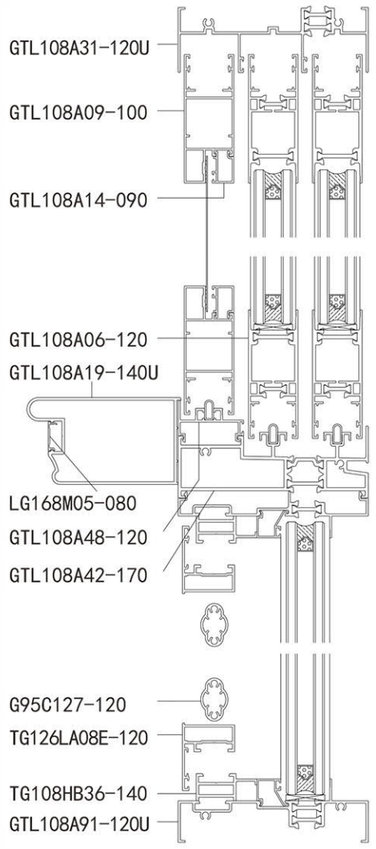


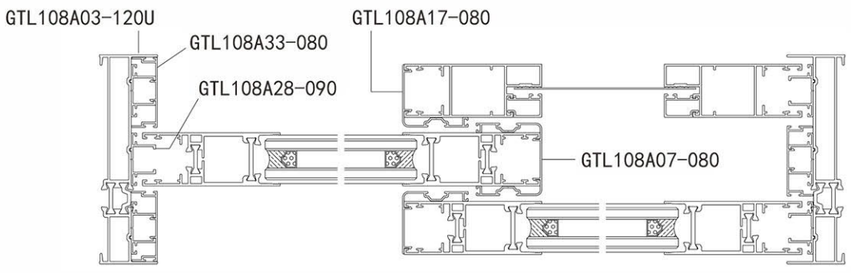


1500mm x 2000mm x 800mm单开标窗每平方用料：9.088kg/m²(不含护栏)

GTL108A系列隔热推拉窗截面图


(隔热条宽度为14.8mm)

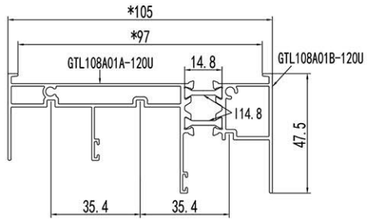




配GTL108A84-100压线


型号	GTL108A01-120U	名称	上滑	型号	GTL108A111-120U	名称	固上滑
壁厚(mm)	1.3	米重(kg/m)	1.486	壁厚(mm)	1.3	米重(kg/m)	1.579

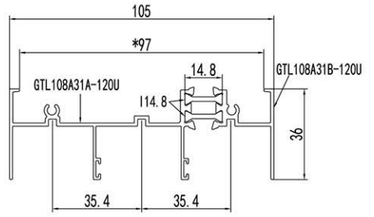




配GTL108A04-080压线


型号	GTL108A31-120U	名称	上滑	型号	GTL108A121-120U	名称	固上滑
壁厚(mm)	1.3	米重(kg/m)	1.16	壁厚(mm)	1.3	米重(kg/m)	1.525




配GTL108A84-100压线

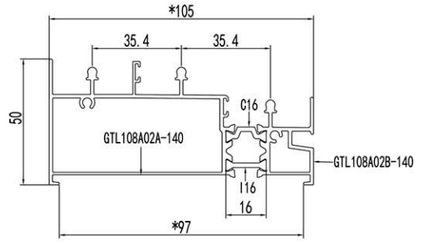

型号	GTL108A101-120U	名称	固上滑	型号	GTL108A02-140	名称	下滑
壁厚(mm)	1.3	米重(kg/m)	1.753	壁厚(mm)	1.4	米重(kg/m)	1.671




配GTL108A04-080压线




型号	GTL108A131-120U	名称	固上滑	型号	108AD32-120	名称	下滑
壁厚(mm)	1.3	米重(kg/m)	1.703	壁厚(mm)	1.2	米重(kg/m)	0.417

GTL108A系列隔热推拉窗截面图

（隔热条宽度为14.8mm）

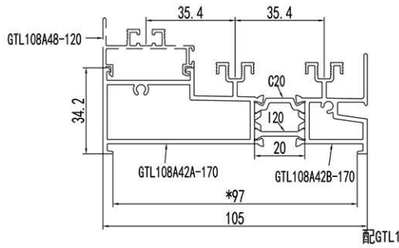


配GTL108A48-120

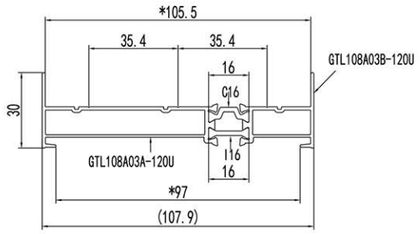


配 GTL108A28-090

型号	GTL108A42-170	名称	下滑	型号	GTL108A03-120U	名称	边封
壁厚(mm)	1.7	米重(kg/m)	1.910	壁厚(mm)	1.3	米重(kg/m)	1.124

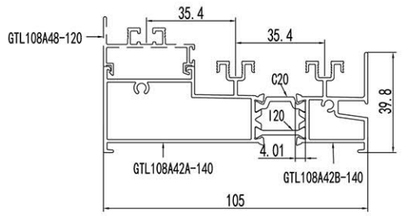


配 GTL108A48-120

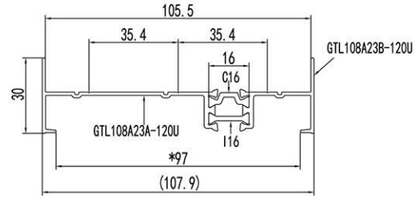


配 GTL108A28-090

型号	GTL108A42-140	名称	下滑	型号	GTL108A23-120U	名称	边封
壁厚(mm)	1.4	米重(kg/m)	1.635	壁厚(mm)	1.3	米重(kg/m)	0.907

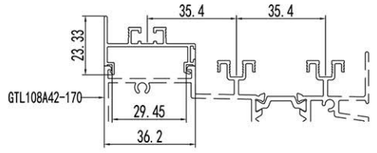


配GTL108A42-170

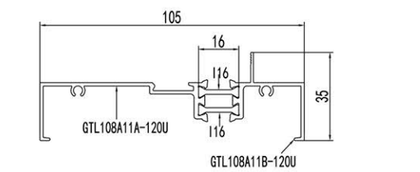


配 GTL108A04-080 压线

型号	GTL108A48-120	名称	挡水板	型号	GTL108A11-120U	名称	上固定
壁厚(mm)	1.2	米重(kg/m)	0.312	壁厚(mm)	1.3	米重(kg/m)	0.932

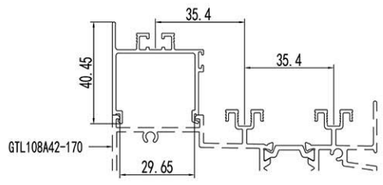

配 GTL108A42-170

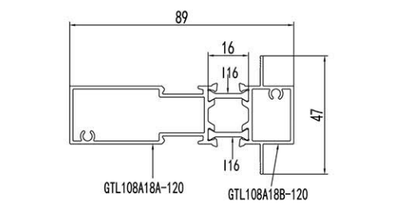


配 GTL108A04-080 压线


型号	GTL108A58-140	名称	挡水板	型号	GTL108A18-120	名称	中柱
壁厚(mm)	1.4	米重(kg/m)	0.482	壁厚(mm)	1.2	米重(kg/m)	1.197

GTL108A系列隔热推拉窗截面图

（隔热条宽度为14.8mm）




配 GTL108A04-080 压线




配:活动角码
配GTL108A07-080
GTL108A17-080

型号	GTL108A13-120	名称	反插板	型号	GTL108A06-120	名称	扇料
壁厚(mm)	1.2	米重(kg/m)	0.658	壁厚(mm)	1.2	米重(kg/m)	1.043




配 GTL108A84-100压线




配:活动角码
配GTL108A37-080
GTL108A47-080

型号	GTL108A91-120U	名称	上固	型号	GTL108A46-120	名称	扇料
壁厚(mm)	1.3	米重(kg/m)	0.983	壁厚(mm)	1.2	米重(kg/m)	0.998




配 GTL108A84-100压线




配:活动角码
配 GTL108A14-090 压线

型号	GTL108A88-120	名称	中柱	型号	GTL108A09-100	名称	纱扇
壁厚(mm)	1.2	米重(kg/m)	1.398	壁厚(mm)	1.0	米重(kg/m)	0.670



配 GTL108A84-100压线
GTL108A01-120U




配:活动角码
配 GTL108A14-090压线

型号	GTL108A93-120	名称	反插板	型号	GTL108A49-100	名称	纱扇
壁厚(mm)	1.2	米重(kg/m)	0.706	壁厚(mm)	1.0	米重(kg/m)	0.643


GTL108A系列隔热推拉窗截面图

（隔热条宽度为14.8mm）




配:活动角码
配 108AD29-090压线

型号	108AD09-120	名称	纱扇
壁厚(mm)	1.2	米重(kg/m)	0.713




配 108AD29-090压线

型号	108AD19-120	名称	纱中横
壁厚(mm)	1.2	米重(kg/m)	0.755




配 GTL108A06-120

型号	GTL108A17-080	名称	单勾企盖板
壁厚(mm)	0.8	米重(kg/m)	0.189




配 GTL108A06-120

型号	GTL108A07-080	名称	双勾企盖板
壁厚(mm)	0.8	米重(kg/m)	0.302




配GTL108A46-120

型号	GTL108A37-080	名称	勾企盖板
壁厚(mm)	0.8	米重(kg/m)	0.183




配GTL108A46-120

型号	GTL108A47-080	名称	勾企盖板
壁厚(mm)	0.8	米重(kg/m)	0.292




型号	GTL108A04-080	名称	压线
壁厚(mm)	0.8	米重(kg/m)	0.116



型号	GTL108A84-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.250


GTL108A系列隔热推拉窗截面图

（隔热条宽度为14.8mm）




配 GTL108A09-100

型号	GTL108A14-090	名称	纱压线
壁厚(mm)	0.9	米重(kg/m)	0.129




型号	108AD29-090	名称	压线
壁厚(mm)	0.9	米重(kg/m)	0.111




配 GTL108A03-120U
GTL108A23-120U

型号	GTL108A28-090	名称	锁座
壁厚(mm)	0.9	米重(kg/m)	0.148




配 GTL108A06-120

型号	GTL108A08-090	名称	收口
壁厚(mm)	0.9	米重(kg/m)	0.167




配 GTL108A28-090

型号	LG168M05-080	名称	盖板
壁厚(mm)	0.8	米重(kg/m)	0.049




配 LG168M05 盖板

型号	GTL108A19-140U	名称	装饰边
壁厚(mm)	1.5	米重(kg/m)	1.088



配 LG168M02


型号	LG168M05-080	名称	盖板
壁厚(mm)	0.8	米重(kg/m)	0.049




型号	TG108HB36-140	名称	副框
壁厚(mm)	1.4	米重(kg/m)	0.320

GTL108A系列隔热推拉窗截面图


（隔热条宽度为14.8mm）




配H11071角码





型号	TG126LA08E-120	名称	防盗格	型号	G95C127-120	名称	格条
壁厚(mm)	1.2	米重(kg/m)	0.412	壁厚(mm)	1.2	米重(kg/m)	0.247





型号	TG108F32-140	名称	拼管	型号	FG108D08-220	名称	拼管
壁厚(mm)	1.4	米重(kg/m)	1.878	壁厚(mm)	2.2	米重(kg/m)	2.021







型号	TG108F42-120	名称	拼板	型号	TL108C33-120U	名称	拼板
壁厚(mm)	1.2	米重(kg/m)	0.713	壁厚(mm)	1.3	米重(kg/m)	0.546


GTL108A系列隔热推拉窗截面图


（隔热条宽度为14.8mm）

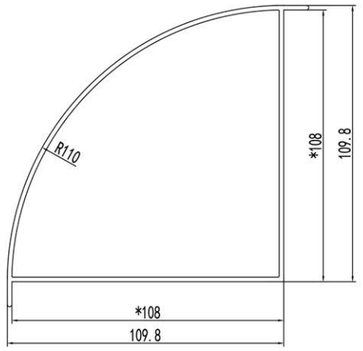

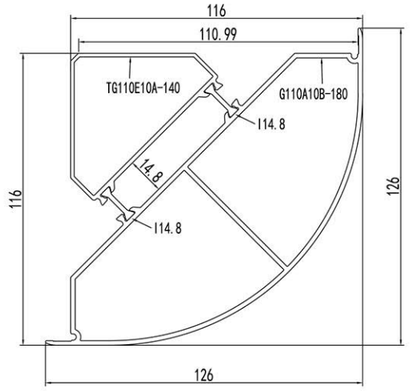


型号	G10830-180	名称	转角	型号	G110A10-T01	名称	转角
壁厚(mm)	1.8	米重(kg/m)	1.974	壁厚(mm)	1.4	米重(kg/m)	3.121

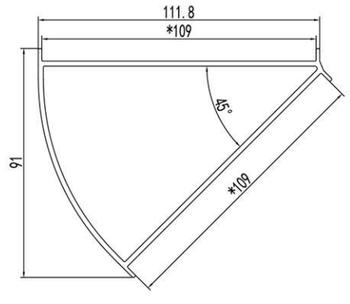


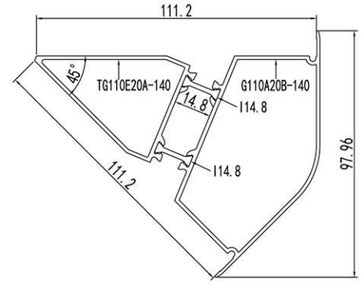


型号	PK10820	名称	转角	型号	G110A20-140	名称	转角
壁厚(mm)	2.0	米重(kg/m)	1.77	壁厚(mm)	1.4	米重(kg/m)	1.811

G108TL系列隔热极窄推拉窗装配图

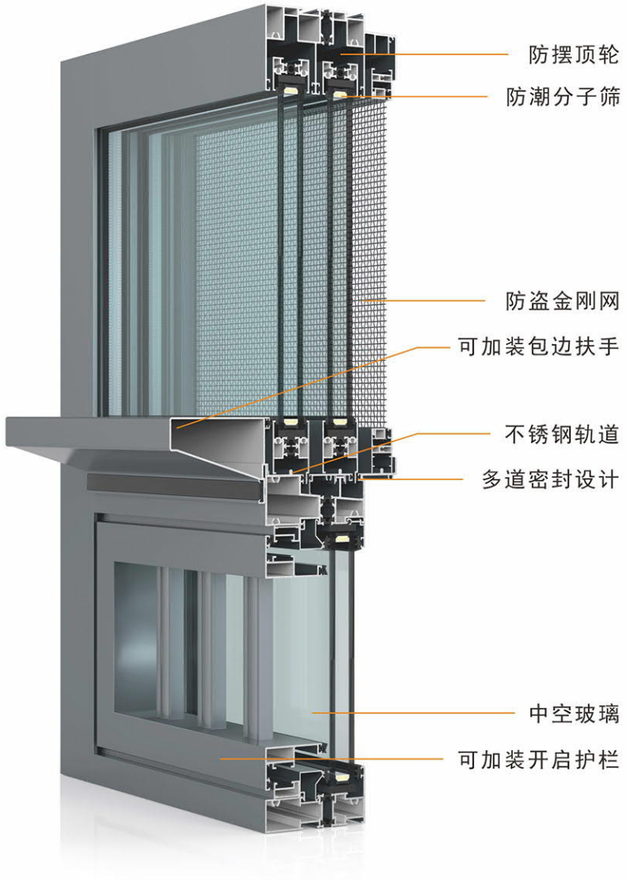

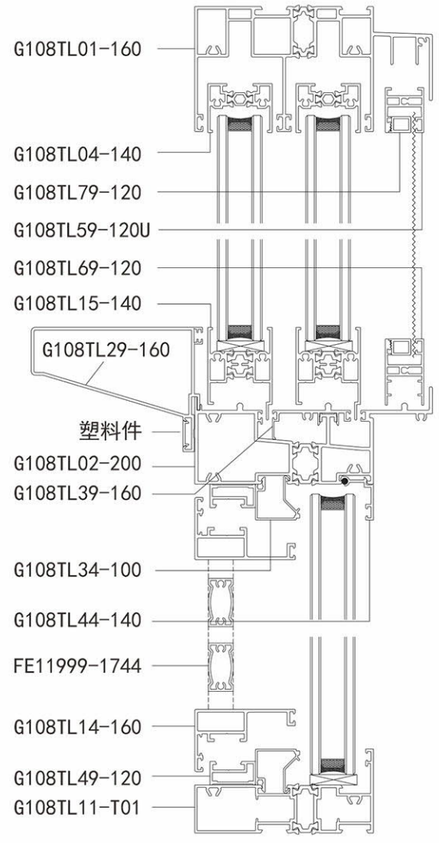


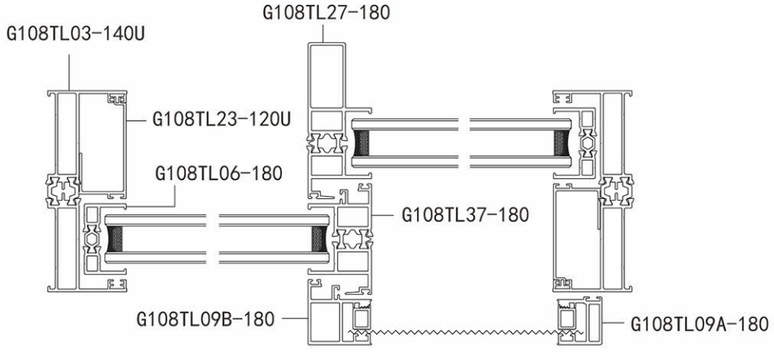


2000mm x 1500mm x 600mm推拉窗每平方用料：11.426kg/m²


G108TL系列隔热极窄推拉窗截面图


(隔热条宽度为14.8mm)

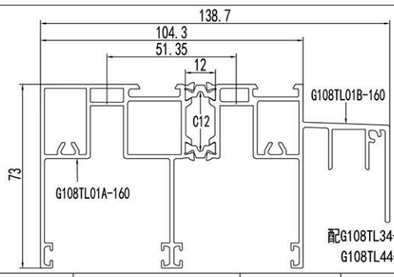





型号	G108TL01-160	名称	上滑	型号	G108TL11-T01	名称	上固定
壁厚(mm)	1.6	米重(kg/m)	3.215	壁厚(mm)	1.4/1.6	米重(kg/m)	1.740

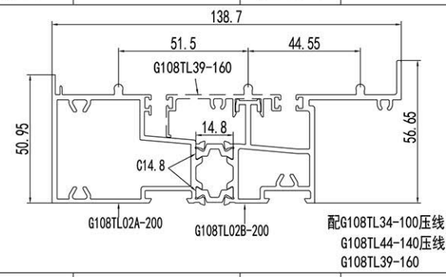

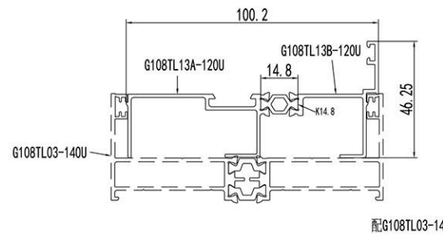



型号	G108TL02-200	名称	下滑	型号	G108TL13-120U	名称	边封盖板
壁厚(mm)	2.0	米重(kg/m)	2.642	壁厚(mm)	1.3	米重(kg/m)	0.963

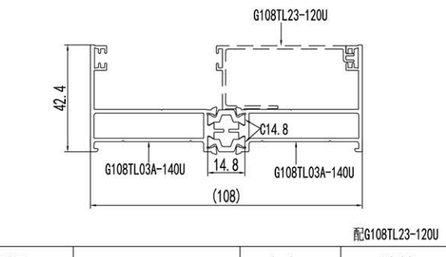



型号	G108TL03-140U	名称	边封	型号	G108TL04-140	名称	上方
壁厚(mm)	1.5	米重(kg/m)	1.533	壁厚(mm)	1.4	米重(kg/m)	0.690

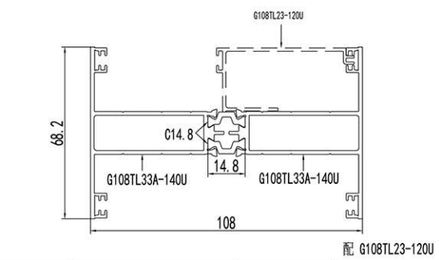





型号	G108TL33-140U	名称	双边封	型号	G108TL15-140	名称	下方
壁厚(mm)	1.5	米重(kg/m)	1.875	壁厚(mm)	1.4	米重(kg/m)	1.018

G108TL系列隔热极窄推拉窗截面图

（隔热条宽度为14.8mm）





配 G108TL08-120U



配 G108TL79-120


型号	G108TL06-180	名称	光企	型号	G108TL59-120U	名称	纱扇上方
壁厚(mm)	1.8	米重(kg/m)	0.559	壁厚(mm)	1.3	米重(kg/m)	0.426






配G108TL79-120


型号	G108TL27-180	名称	勾企	型号	G108TL69-120	名称	纱扇下方
壁厚(mm)	1.8	米重(kg/m)	1.367	壁厚(mm)	1.2	米重(kg/m)	0.514






配 G108TL79-120
G108TL28-100

型号	G108TL37-180	名称	勾企	型号	G108TL09-180	名称	纱扇光企
壁厚(mm)	1.8	米重(kg/m)	1.173	壁厚(mm)	1.8	米重(kg/m)	0.468



配 G108TL06-180




配 G108TL79-120


型号	G108TL08-120U	名称	收口	型号	G108TL09A-180	名称	纱扇光企
壁厚(mm)	1.3	米重(kg/m)	0.768	壁厚(mm)	1.8	米重(kg/m)	0.483

G108TL系列隔热极窄推拉窗截面图

（隔热条宽度为14.8mm）




配 G108TL79-120

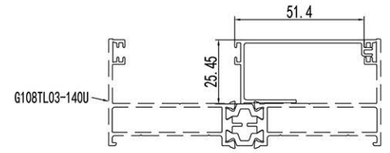


配 G108TL03-140U

型号	G108TL09B-180	名称	纱扇勾企	型号	G108TL23-120U	名称	辅料
壁厚(mm)	1.8	米重(kg/m)	0.682	壁厚(mm)	1.3	米重(kg/m)	0.378




配 G108TL09-180




配G108TL11-T01


型号	G108TL28-100	名称	纱扇收口	型号	G108TL24-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.322	壁厚(mm)	1.0	米重(kg/m)	0.287

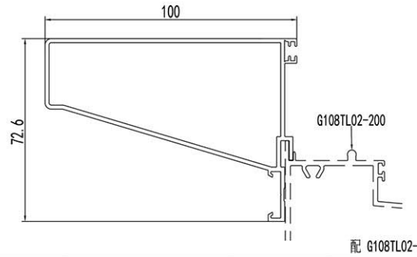


配 G108TL02-200



型号	G108TL29-160	名称	扶手料	型号	G108TL34-100	名称	压线
壁厚(mm)	1.6	米重(kg/m)	1.365	壁厚(mm)	1.0	米重(kg/m)	0.263

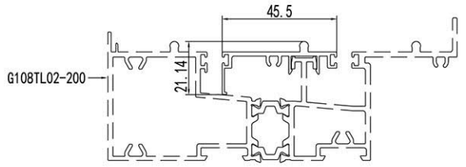


配 G108TL02-200




型号	G108TL39-160	名称	辅料	型号	G108TL44-140	名称	压线
壁厚(mm)	1.6	米重(kg/m)	0.374	壁厚(mm)	1.4	米重(kg/m)	0.201


G108TL系列隔热极窄推拉窗截面图

（隔热条宽度为14.8mm）






型号	G108TL79-120	名称	辅料	型号	FE11999-1744	名称	格条
壁厚(mm)	1.2	米重(kg/m)	0.131	壁厚(mm)	1.2	米重(kg/m)	0.320




型号	G108TL19-160	名称	辅料
壁厚(mm)	1.6	米重(kg/m)	0.187



配：活动角码


型号	G108TL49-120	名称	中隔
壁厚(mm)	1.2	米重(kg/m)	0.322





配：活动角码

型号	G108TL14-160	名称	防盗格
壁厚(mm)	1.6	米重(kg/m)	0.730

TG136A系列隔热推拉窗装配图

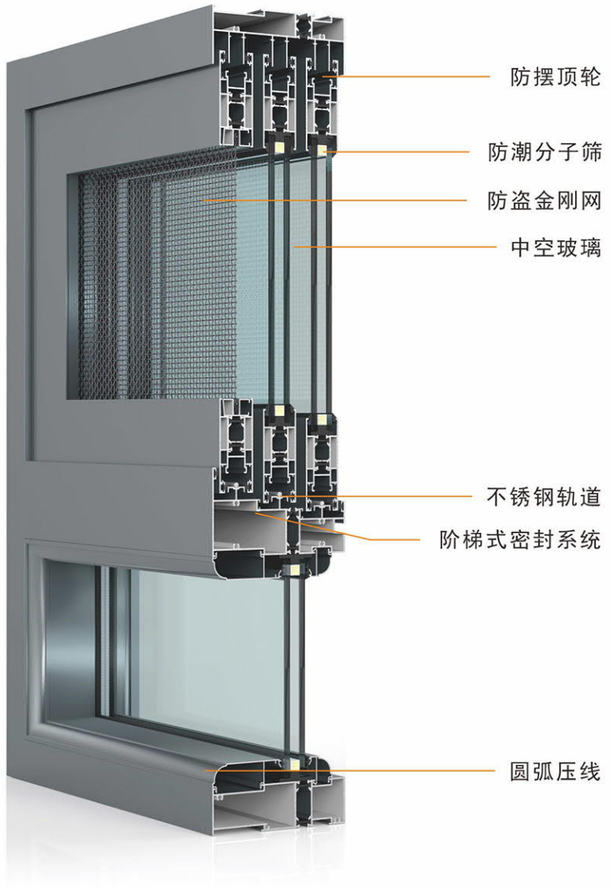

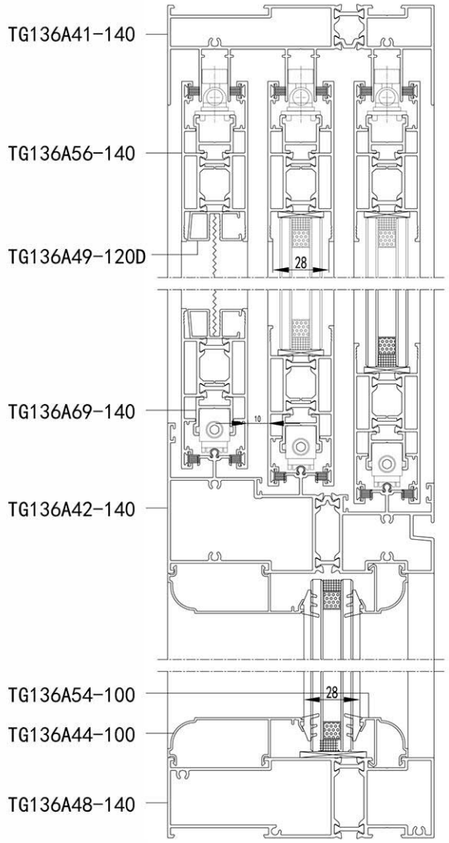


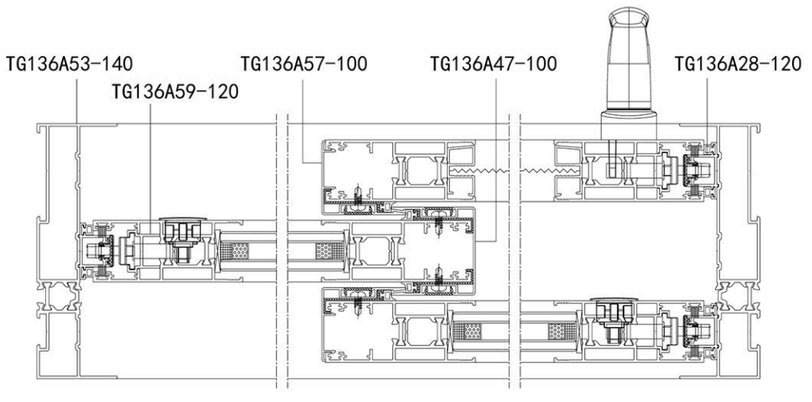

2000mm x 1500mm x 600mm推拉窗每平方用料：14.591kg/m^2


TG136A系列隔热推拉窗截面图

（隔热条宽度为14.8mm）

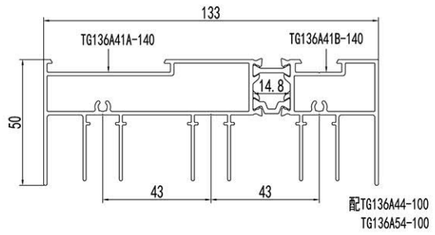


配TG136A44-100
TG136A54-100

型号	TG136A41-140	名称	上滑
壁厚(mm)	1.4	米重(kg/m)	2.353

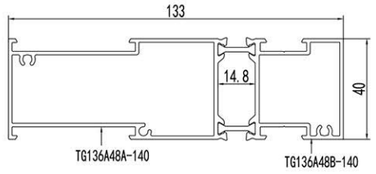


配TG136A44-100 压线
TG136A54-100压线

型号	TG136A48-140	名称	中柱
壁厚(mm)	1.4	米重(kg/m)	1.971

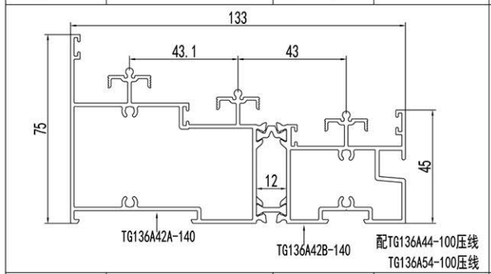


配TG136A44-100压线
TG136A54-100压线


型号	TG136A42-140	名称	下滑
壁厚(mm)	1.4	米重(kg/m)	2.721

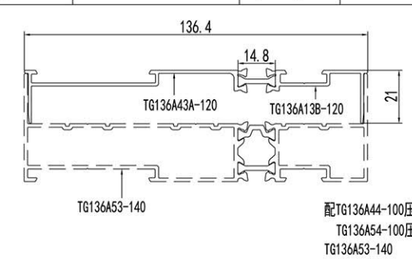

配TG136A44-100压线
TG136A54-100压线
TG136A53-140

型号	TG136A43-120	名称	边封盖板
壁厚(mm)	1.2	米重(kg/m)	0.778







配:活动角码
配TG136A49-120D,
TG136A47-100,
TG136A59-120

型号	TG136A12-180	名称	下滑
壁厚(mm)	1.8	米重(kg/m)	0.964

型号	TG136A56-140	名称	扇料
壁厚(mm)	1.4	米重(kg/m)	1.352

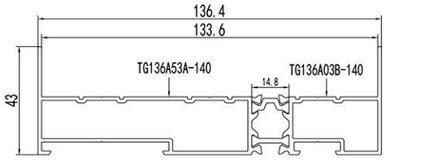

配TG136A44-100 TG136A54-100
TG136A43-120，TG136A46-140
TG136A28-120




配:活动角码
配TG108F14-120D压线

型号	TG136A53-140	名称	边封
壁厚(mm)	1.4	米重(kg/m)	1.762

型号	TG136A79-120	名称	纱扇
壁厚(mm)	1.2	米重(kg/m)	0.955


TG136A系列隔热推拉窗截面图

（隔热条宽度为14.8mm）




配TG136A56-140

型号	TG136A47-100	名称	双勾企盖板
壁厚(mm)	1.0	米重(kg/m)	0.441




配TG136A56-140

型号	TG136A59-120	名称	欧标槽
壁厚(mm)	1.2	米重(kg/m)	0.205




配TG136A56-140

型号	TG136A57-100	名称	单勾企盖板
壁厚(mm)	1.0	米重(kg/m)	0.297




配TG136A56-140

型号	TG136A69-140	名称	轮架
壁厚(mm)	1.4	米重(kg/m)	0.236




配TG136A56-140

型号	TG136A58-120	名称	收口
壁厚(mm)	1.2	米重(kg/m)	0.357

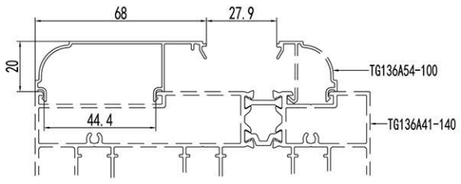


配TG136A41-140/TG136A42-140
TG136A53-140/TG136A48-140/TG136A43-120

型号	TG136A44-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.335

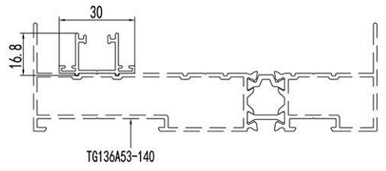

配TG136A53-140

型号	TG136A28-120	名称	锁座
壁厚(mm)	1.2	米重(kg/m)	0.241

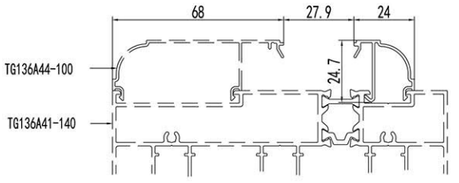


配TG136A41-140/TG136A42-140
TG136A53-140/TG136A48-140/TG136A43-120

型号	TG136A54-100	名称	压线
壁厚(mm)	1.0	米重(kg/m)	0.213


TG136A系列隔热推拉窗截面图

（隔热条宽度为14.8mm）




配 TG136A79-120

型号	TG108F14-120D	名称	纱压线
壁厚(mm)	1.2(1.08)	米重(kg/m)	0.102




配TG136A56-140

型号	TG136A49-120D	名称	单玻槽口
壁厚(mm)	1.2(1.08)	米重(kg/m)	0.257




配 TG136A56-140
TG136A67-100

型号	TG136A64-100	名称	盖板
壁厚(mm)	1.0	米重(kg/m)	0.138

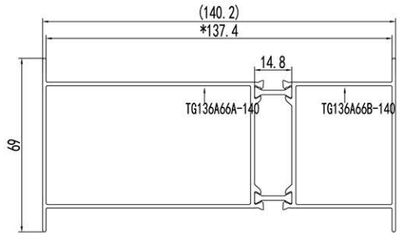


型号	TG136A66-140	名称	拼管
壁厚(mm)	1.4	米重(kg/m)	2.094




配 TG136A56-140
TG136A74-100

型号	TG136A67-100	名称	勾企
壁厚(mm)	1.0	米重(kg/m)	0.195



配TG136A53-140
TG130D03-140

型号	TG136A46-140	名称	拼板
壁厚(mm)	1.4	米重(kg/m)	0.934




配 TG136A56-140
TG136A67-100

型号	TG136A74-100	名称	盖板
壁厚(mm)	1.0	米重(kg/m)	0.16


TG136A系列隔热推拉窗截面图

（隔热条宽度为14.8mm）

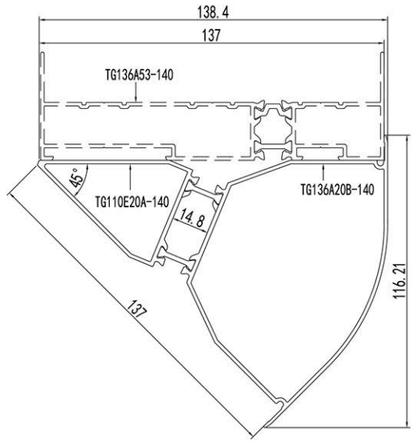


配 TG136A53-140

型号	TG136A20-140	名称	转角
壁厚(mm)	1.4	米重(kg/m)	2.037

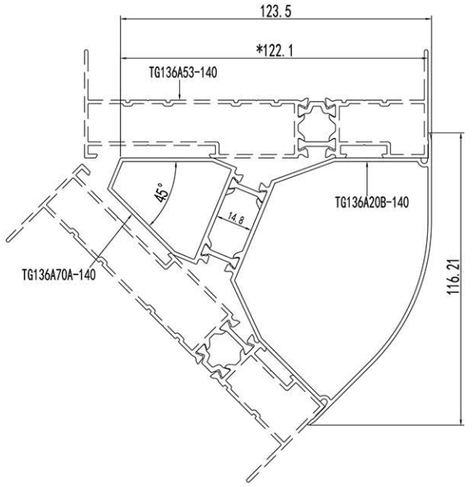


配 TG136A53-140

型号	TG136A70-140	名称	转角
壁厚(mm)	1.4	米重(kg/m)	1.964

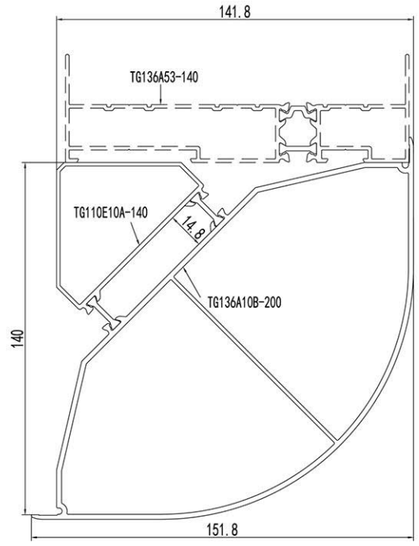

配 TG136A53-140


型号	TG136A10-T01	名称	转角
壁厚(mm)	*	米重(kg/m)	3.917

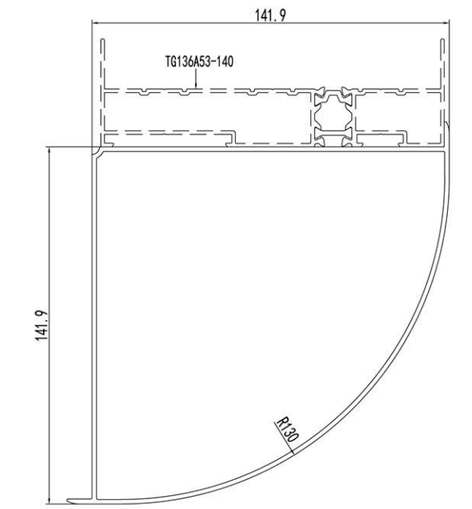



配TG136A53-140

型号	TG136A40-180	名称	转角
壁厚(mm)	1.8	米重(kg/m)	2.555

108AD系列推拉窗装配图

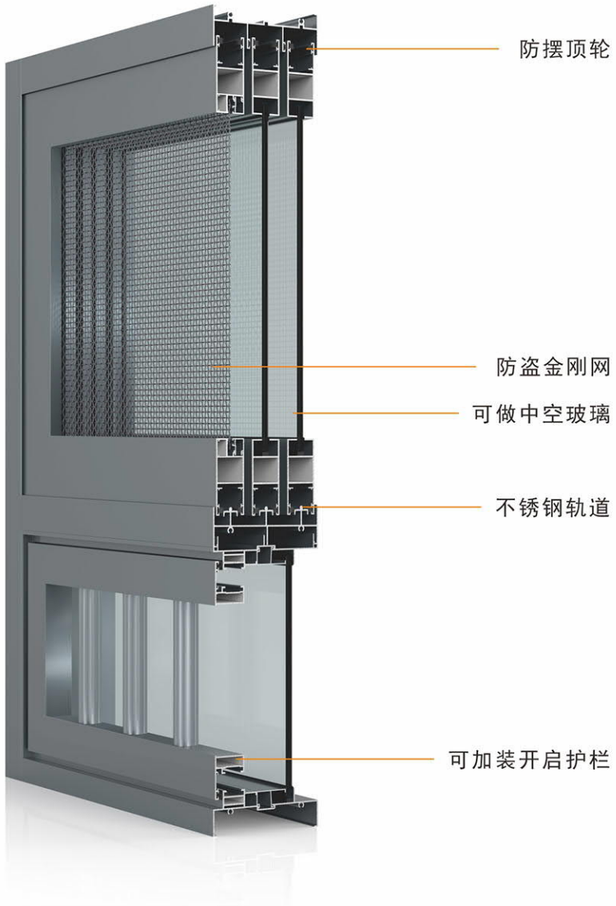


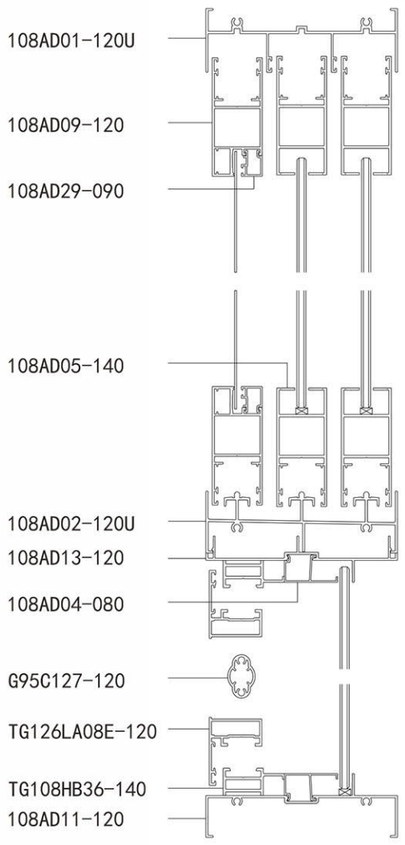

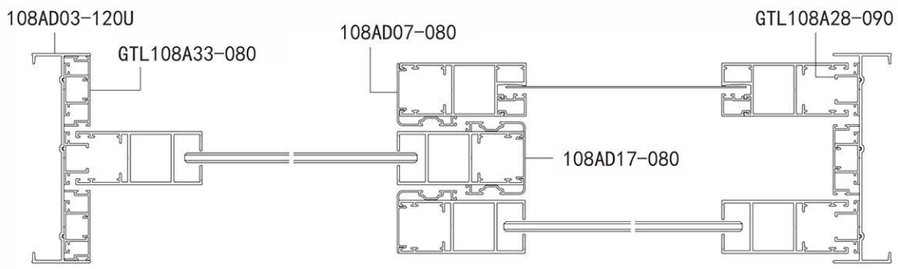


2000mm x 1500mm x 700mm推拉窗每平方用料：6.5kg/m²


108AD系列推拉窗截面图




型号	108AD21-120U	名称	上滑
壁厚(mm)	1.3	米重(kg/m)	0.702



型号	108AD23-120U	名称	边封
壁厚(mm)	1.3	米重(kg/m)	0.507




型号	108AD12-120U	名称	下滑
壁厚(mm)	1.3	米重(kg/m)	0.842




配 108AD04-080 压线

型号	108AD31-120	名称	上固
壁厚(mm)	1.2	米重(kg/m)	0.521




配 108AD04-080 压线


型号	108AD62-120U	名称	下滑
壁厚(mm)	1.3	米重(kg/m)	1.228



配108AD04-080压线

型号	108AD28-120	名称	中柱
壁厚(mm)	1.2	米重(kg/m)	0.810






配 108AD04-080 压线


型号	108AD42-120	名称	下滑
壁厚(mm)	1.2	米重(kg/m)	0.299

型号	108AD33-100	名称	盖板
壁厚(mm)	1.0	米重(kg/m)	0.351


108AD系列推拉窗截面图



型号	108AD01-120U	名称	上滑
壁厚(mm)	1.3	米重(kg/m)	0.882




型号	108AD02-120U	名称	下滑
壁厚(mm)	1.3	米重(kg/m)	1.130




配 108AD04-080 压线


型号	108AD52-120U	名称	下滑
壁厚(mm)	1.3	米重(kg/m)	1.616



型号	108AD32-120	名称	下滑
壁厚(mm)	1.2	米重(kg/m)	0.417




型号	108AD03-120U	名称	边封
壁厚(mm)	1.3	米重(kg/m)	0.611




配 108AD04-080 压线

型号	108AD11-120	名称	上固
壁厚(mm)	1.2	米重(kg/m)	0.614



配 108AD04-080 压线


型号	108AD18-120	名称	中柱
壁厚(mm)	1.2	米重(kg/m)	0.905



配 108AD04-080 压线


型号	108AD13-120	名称	盖板
壁厚(mm)	1.2	米重(kg/m)	0.513

108AD系列推拉窗截面图




配:活动角码

型号	108AD05-140	名称	扇料
壁厚(mm)	1.4	米重(kg/m)	0.773




配 108AD07-080
配:客户角码


型号	108AD75-120U	名称	扇料
壁厚(mm)	1.3	米重(kg/m)	0.673



型号	108AD49-140	名称	中横
壁厚(mm)	1.4	米重(kg/m)	0.821




型号	108AD79-120	名称	中横
壁厚(mm)	1.2	米重(kg/m)	0.624




配:活动角码
配 108AD29-090 压线

型号	108AD09-120	名称	纱扇
壁厚(mm)	1.2	米重(kg/m)	0.713




配 108AD29-090 压线

型号	108AD19-120	名称	纱中横
壁厚(mm)	1.2	米重(kg/m)	0.755





型号	108AD07-080	名称	勾企盖板
壁厚(mm)	0.8	米重(kg/m)	0.182




型号	108AD17-080	名称	勾企盖板
壁厚(mm)	0.8	米重(kg/m)	0.289


108AD系列推拉窗截面图






型号	108AD39-080	名称	盖板	型号	GTL108A28-090	名称	锁座
壁厚(mm)	0.8	米重(kg/m)	0.140	壁厚(mm)	0.9	米重(kg/m)	0.148






配 GTL108A28-090


型号	108AD04-080	名称	压线	型号	GTL108A33-080	名称	盖板
壁厚(mm)	0.8	米重(kg/m)	0.140	壁厚(mm)	0.8	米重(kg/m)	0.165






配 GTL108A06-120

型号	108AD29-090	名称	压线	型号	GTL108A08-090	名称	收口
壁厚(mm)	0.9	米重(kg/m)	0.111	壁厚(mm)	0.9	米重(kg/m)	0.167




型号	GTL108A04-080	名称	压线
壁厚(mm)	0.8	米重(kg/m)	0.116


108AD系列推拉窗截面图

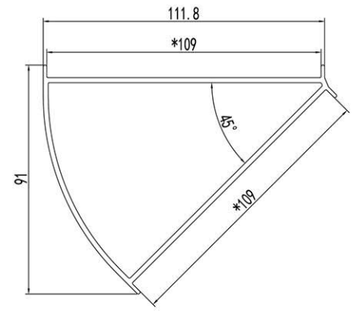


型号	PK10820	名称	转角
壁厚(mm)	2.0	米重(kg/m)	1.77

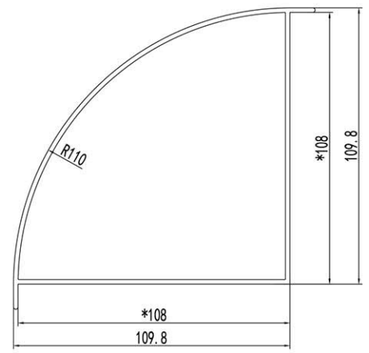


型号	G10830-180	名称	转角
壁厚(mm)	1.8	米重(kg/m)	1.974



型号	TL108C33-120U	名称	拼板
壁厚(mm)	1.3	米重(kg/m)	0.546



型号	88838	名称	拼板
壁厚(mm)	1.2	米重(kg/m)	0.425



型号	88838	名称	拼板
壁厚(mm)	1.4	米重(kg/m)	0.496





推拉门


功能齐全 推拉顺畅 易制作

- 凤铝推拉门，标配凤铝铝型材，采用原厂胶条、品牌五金，手感舒适，推拉顺畅。
- 采用嵌入式框包扇设计，能有效密封防水、防风、防噪音。
- 上防摆轮设计，防止推拉门在使用过程中的摆动，让使用更加安全舒心。
- 人性化轨道设计，配置304不锈钢轨道，推拉顺滑静音，平稳防晃，耐磨损。

TL190系列推拉门装配图

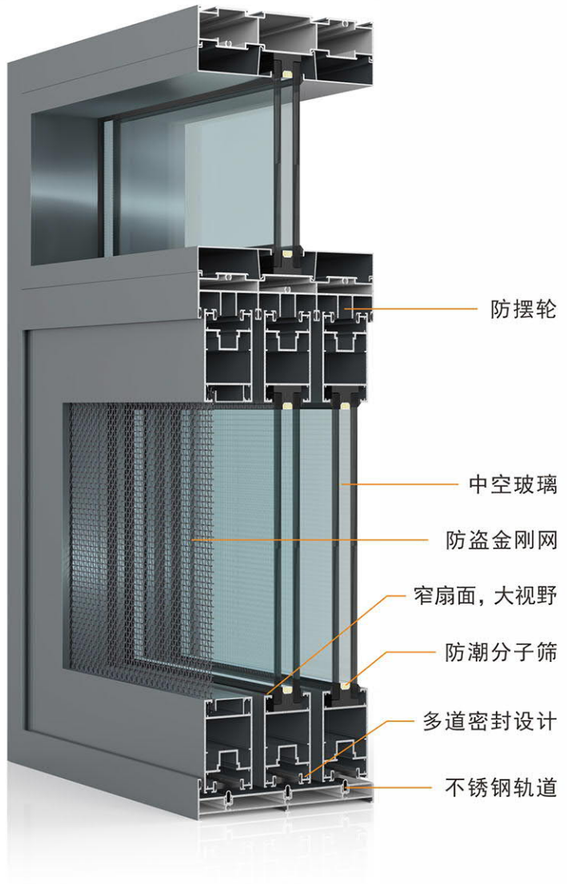

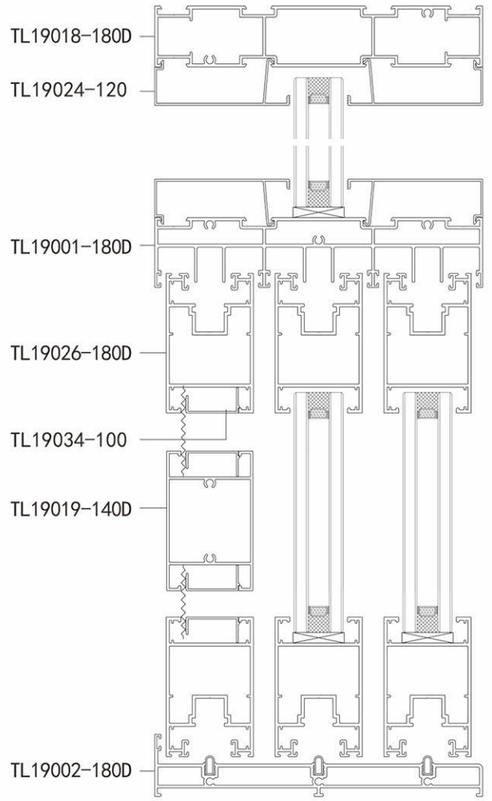


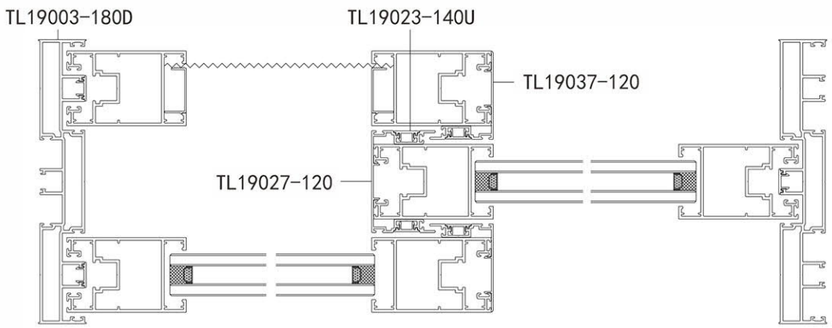

1800mm x 2200mm x 500mm推拉门窗每平方用料：14.918kg/m²


TL190系列推拉门截面图

（三轨）

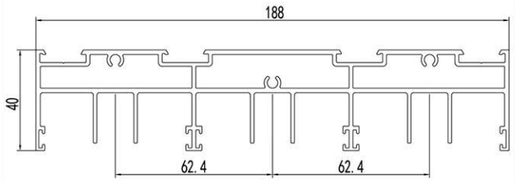


配 TL19024-120压线


型号	TL19001-180D	名称	上滑
壁厚(mm)	1.8	米重(kg/m)	3.236



型号	TL19002-180D	名称	下滑
壁厚(mm)	1.8	米重(kg/m)	2.223

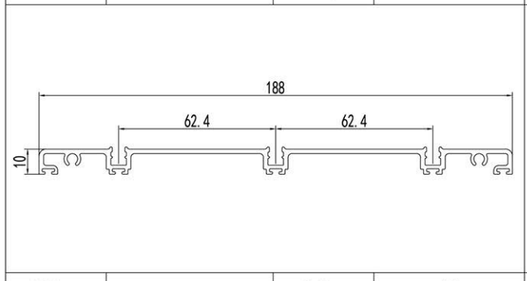


型号	TL19012-180D	名称	下滑
壁厚(mm)	1.8	米重(kg/m)	1.376

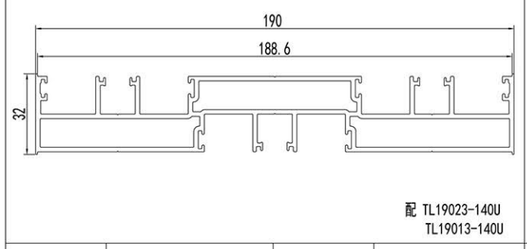


配 TL19023-140U
TL19013-140U

型号	TL19003-180D	名称	边封
壁厚(mm)	1.8	米重(kg/m)	3.041

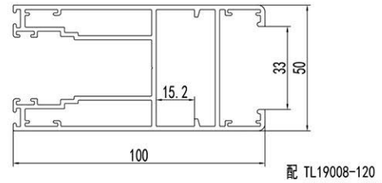


配 TL19008-120
TL19028-120
配:活动角码

型号	TL19006-180D	名称	扇料
壁厚(mm)	1.8	米重(kg/m)	2.221




配 TL19014-140压线
配:活动角码

型号	TL19016-160D	名称	纱扇
壁厚(mm)	1.6	米重(kg/m)	1.951



配 TL19014-140压线

型号	TL19009-160D	名称	纱中横
壁厚(mm)	1.6	米重(kg/m)	1.857




配 TL19009-160D
TL19016-160D

型号	TL19014-140	名称	压线
壁厚(mm)	1.4	米重(kg/m)	0.217


TL190系列推拉门截面图

（三轨）

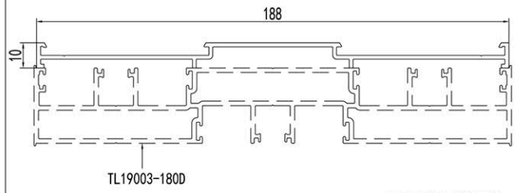


配 TL19024-120压线
TL19003-180D

型号	TL19013-140U	名称	边封盖板
壁厚(mm)	1.4	米重(kg/m)	0.960




配 TL19024-120压线

型号	TL19018-180D	名称	中柱
壁厚(mm)	1.8	米重(kg/m)	2.639

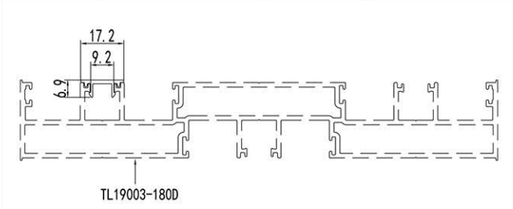


配 TL19003-180D

型号	TL19023-140U	名称	盖板
壁厚(mm)	1.5	米重(kg/m)	0.097

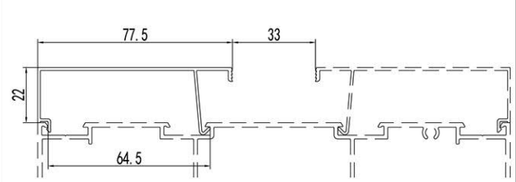


型号	TL19024-120	名称	压线
壁厚(mm)	1.2	米重(kg/m)	0.427

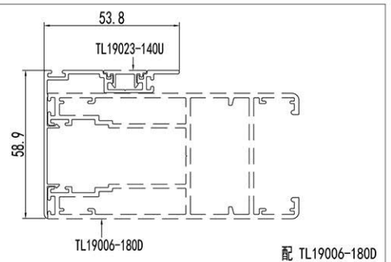


配 TL19006-180D

型号	TL19007-120	名称	勾企盖板
壁厚(mm)	1.2	米重(kg/m)	0.519

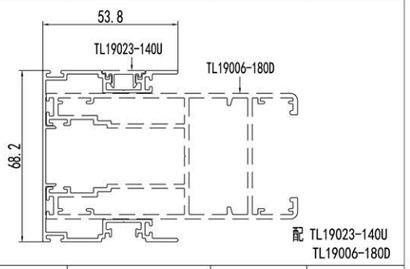


配 TL19023-140U
TL19006-180D

型号	TL19017-120	名称	勾企盖板
壁厚(mm)	1.2	米重(kg/m)	0.851

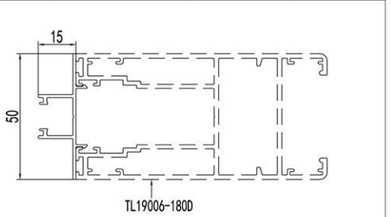

配 TL19006-180D

型号	TL19008-120	名称	收口
壁厚(mm)	1.2	米重(kg/m)	0.302

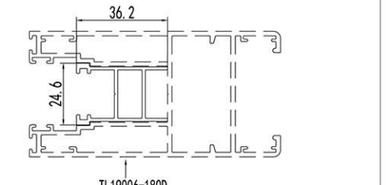


配 TL19006-180D
配:活动角码


型号	TL19028-120	名称	锁槽
壁厚(mm)	1.2	米重(kg/m)	0.423

TL190系列推拉门截面图

（中窄扇）




配:活动角码
配TL19034-100
TL19037-120
TL19027-120




配:活动角码
配 TL19034-100
TL19057-120
TL19047-120

型号	TL19026-180D	名称	扇料	型号	TL19036-180D	名称	扇料
壁厚(mm)	1.8	米重(kg/m)	1.724	壁厚(mm)	1.8	米重(kg/m)	1.466




配 TL19026-180D
TL19023-140U




配 TL19036-180D
TL19023-140U

型号	TL19037-120	名称	勾企盖板	型号	TL19057-120	名称	勾企盖板
壁厚(mm)	1.2	米重(kg/m)	0.477	壁厚(mm)	1.2	米重(kg/m)	0.429




配 TL19026-180D
TL19023-140U




配 TL19036-180D
TL19023-140U

型号	TL19027-120	名称	勾企盖板	型号	TL19047-120	名称	勾企盖板
壁厚(mm)	1.2	米重(kg/m)	0.767	壁厚(mm)	1.2	米重(kg/m)	0.670





配 TL19034-100




型号	TL19019-140D	名称	中横	型号	TL19034-100	名称	纱窗压线
壁厚(mm)	1.4	米重(kg/m)	1.158	壁厚(mm)	1.0	米重(kg/m)	0.150

TL190系列推拉门包边、扣板截面图

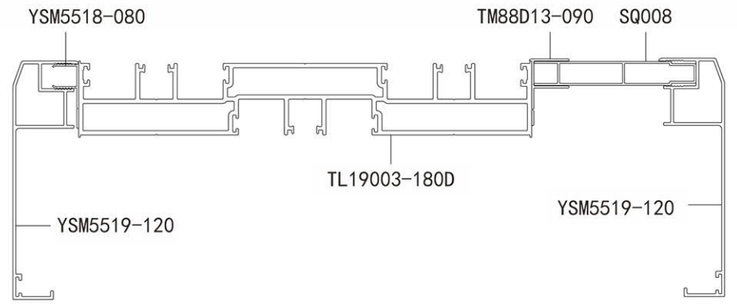





配 YSM5518-080
配：活动角码




配 YSM5519-120

型号	YSM5519-120	名称	门包边	型号	YSM5518-080	名称	F条
壁厚(mm)	1.2	米重(kg/m)	0.679	壁厚(mm)	0.8	米重(kg/m)	0.098






型号	SQ007	名称	扣板	型号	SQ008	名称	扣板
壁厚(mm)	0.8	米重(kg/m)	0.498	壁厚(mm)	0.8	米重(kg/m)	0.35





配 SQ007扣板

型号	TM88D13-090	名称	F条				
壁厚(mm)	0.9	米重(kg/m)	0.141				

TM110Y系列极窄室内推拉门装配图

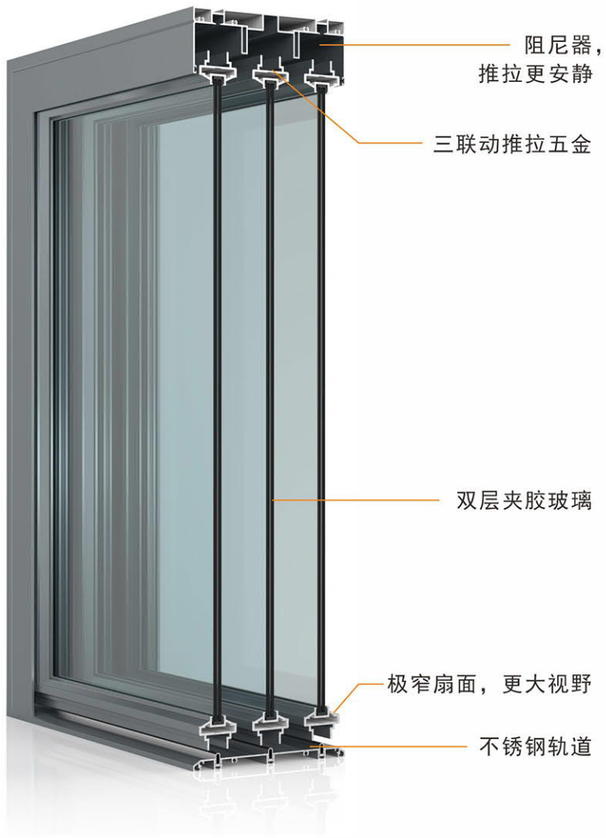


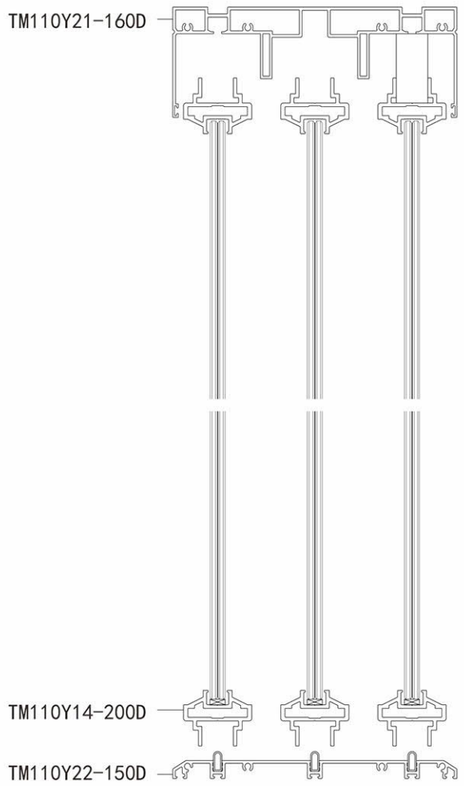

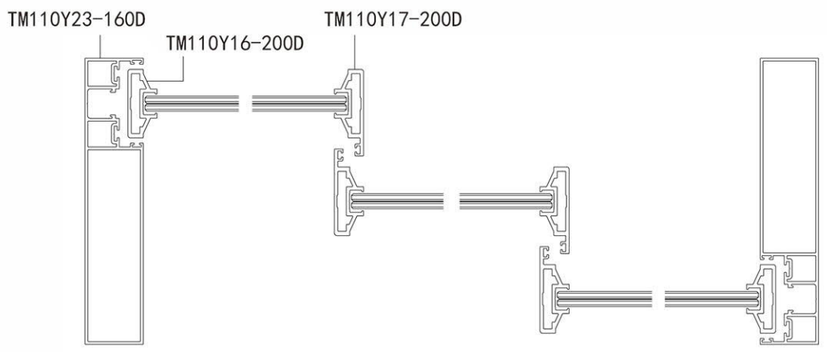


2200mm x 2700mm单开门每平方用料：5.458kg/m²

TM110Y系列极窄室内推拉门截面图




型号	TM110Y01-120	名称	上滑
壁厚(mm)	1.2	米重(kg/m)	0.894




配 TM110Y27-120U


型号	TM110Y51-230	名称	吊轨
壁厚(mm)	2.3	米重(kg/m)	1.156




型号	TM110Y02-150D	名称	门下滑
壁厚(mm)	1.5	米重(kg/m)	0.445



型号	TM110Y03-120	名称	边封
壁厚(mm)	1.2	米重(kg/m)	0.754

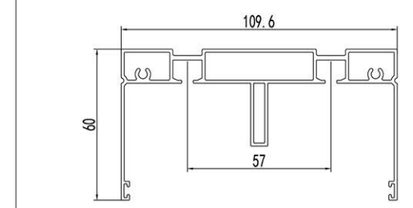


型号	TM110Y11-120	名称	上滑
壁厚(mm)	1.2	米重(kg/m)	1.535




配 TM110Y27-120U

型号	TM110Y41-230	名称	吊轨
壁厚(mm)	2.3	米重(kg/m)	2.040





型号	TM110Y12-150D	名称	门下滑
壁厚(mm)	1.5	米重(kg/m)	0.757



型号	TM110Y13-120	名称	边封
壁厚(mm)	1.2	米重(kg/m)	1.228


TM110Y系列极窄室内推拉门截面图

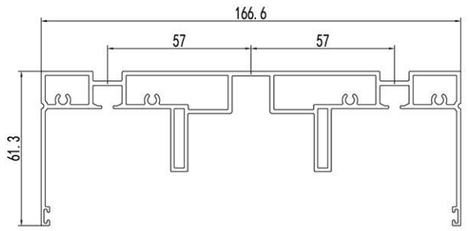




配:活动角码


型号	TM110Y21-160D	名称	上滑	型号	TM110Y04-200D	名称	上下方
壁厚(mm)	1.6	米重(kg/m)	2.728	壁厚(mm)	2.0	米重(kg/m)	0.878

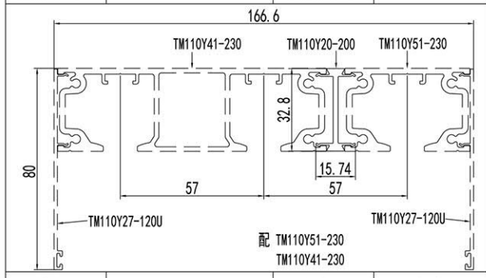




配 TM110Y30-100
配:活动角码


型号	TM110Y20-200	名称	拼条	型号	TM110Y06-200D	名称	光企
壁厚(mm)	2.0	米重(kg/m)	0.285	壁厚(mm)	2.0	米重(kg/m)	0.690






配:活动角码

型号	TM110Y22-150D	名称	门下滑	型号	TM110Y07-200D	名称	勾企
壁厚(mm)	1.5	米重(kg/m)	1.131	壁厚(mm)	2.0	米重(kg/m)	0.773







配:活动角码

型号	TM110Y23-160D	名称	边封	型号	TM110Y14-200D	名称	上下方
壁厚(mm)	1.6	米重(kg/m)	2.049	壁厚(mm)	2.0	米重(kg/m)	0.792

TM110Y系列极窄室内推拉门截面图




配:活动角码




配 TM110Y16-200D

型号	TM110Y16-200D	名称	光企	型号	TM110Y30-100	名称	转角
壁厚(mm)	2.0	米重(kg/m)	0.605	壁厚(mm)	1.0	米重(kg/m)	0.354




配:活动角码

型号	TM110Y17-200D	名称	勾企				
壁厚(mm)	2.0	米重(kg/m)	0.687				



配 TM110Y16-200D


型号	TM110Y08-100	名称	收口				
壁厚(mm)	1.0	米重(kg/m)	0.492				



配 TM110Y51-230
TM110Y41-230


型号	TM110Y27-120U	名称	盖板				
壁厚(mm)	1.3	米重(kg/m)	0.310				

TM110Y系列极窄卫生间平开门截面图




配:活动角码

型号	TM110Y31-140D	名称	门框
壁厚(mm)	1.4	米重(kg/m)	0.836




型号	TM110Y32-140D	名称	中梃
壁厚(mm)	1.4	米重(kg/m)	0.983




配:活动角码

型号	TM110Y33-200D	名称	门扇
壁厚(mm)	2.0	米重(kg/m)	0.659




配:活动角码

型号	TM110Y36-150D	名称	门扇
壁厚(mm)	1.5	米重(kg/m)	0.872



配 TM110Y36-150D


型号	TM110Y38-100	名称	收口
壁厚(mm)	1.0	米重(kg/m)	0.193




配:活动角码


型号	TM110Y16-200D	名称	光企
壁厚(mm)	2.0	米重(kg/m)	0.605

TM110Y系列极窄室内门包边截面图

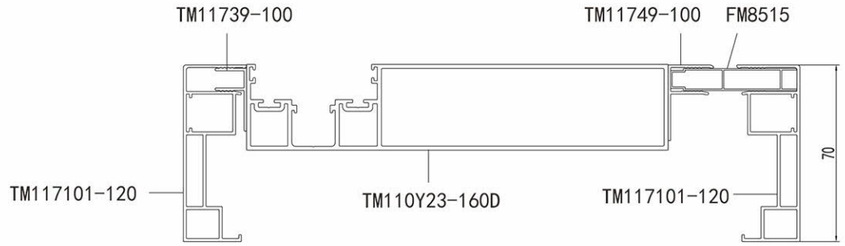


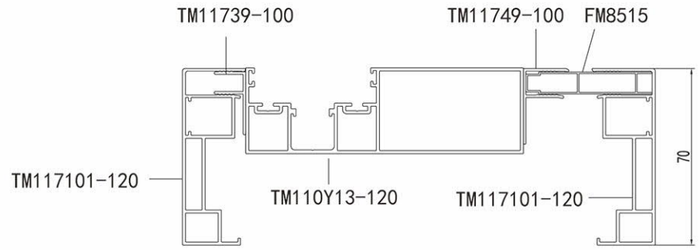

TM110Y系列极窄室内门包边截面图




自配




配 FM8515
配:活动角码

型号	FM8515	名称	扣板	型号	TM11771-100	名称	包边
壁厚(mm)	0.6	米重(kg/m)	0.2	壁厚(mm)	1.0	米重(kg/m)	0.477




自配




配 FM8515
配:活动角码

型号	FM8505	名称	扣板	型号	TM11781-100	名称	包边
壁厚(mm)	0.7	米重(kg/m)	0.435	壁厚(mm)	1.0	米重(kg/m)	0.383




配 TM11771-100




配 FM8515
配:活动角码

型号	TM11739-100	名称	F条	型号	TM11791-100	名称	包边
壁厚(mm)	1.0	米重(kg/m)	0.134	壁厚(mm)	1.0	米重(kg/m)	0.451



配 FM8515



配 FM8515
配:活动角码

型号	TM11749-100	名称	F条	型号	TM117101-120	名称	包边
壁厚(mm)	1.0	米重(kg/m)	0.171	壁厚(mm)	1.2	米重(kg/m)	0.722




阳光房

无惧风雨 尽享阳光 安装便捷


- 凤铝阳光房，标配凤铝型材，积木式快速安装，稳定牢靠。
- 采光面大，视野开阔，是家人与自然亲近的理想空间。
- 隔声保温效果好，克服了传统阳光房冬冷夏热、结雾结冰等问题。



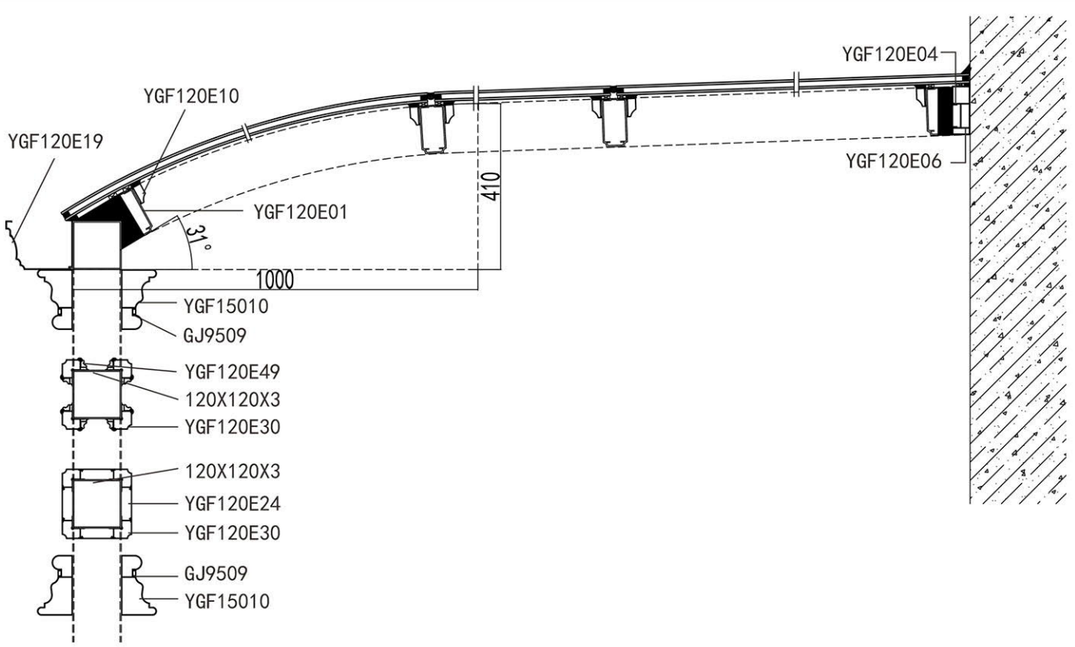


YGF120E系列阳光房



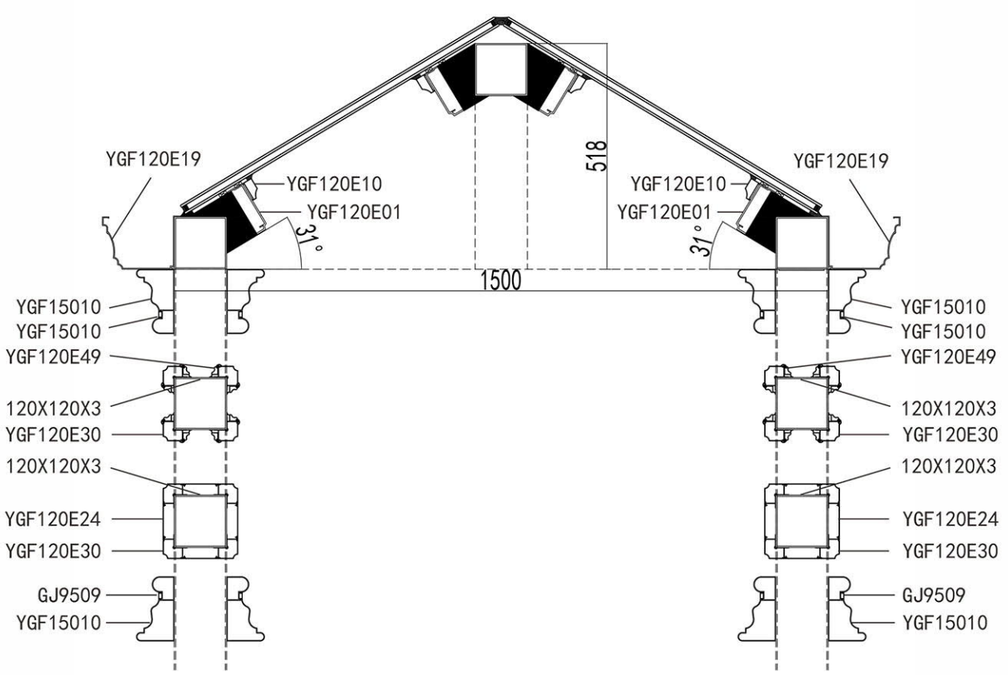



YGF120E系列阳光房



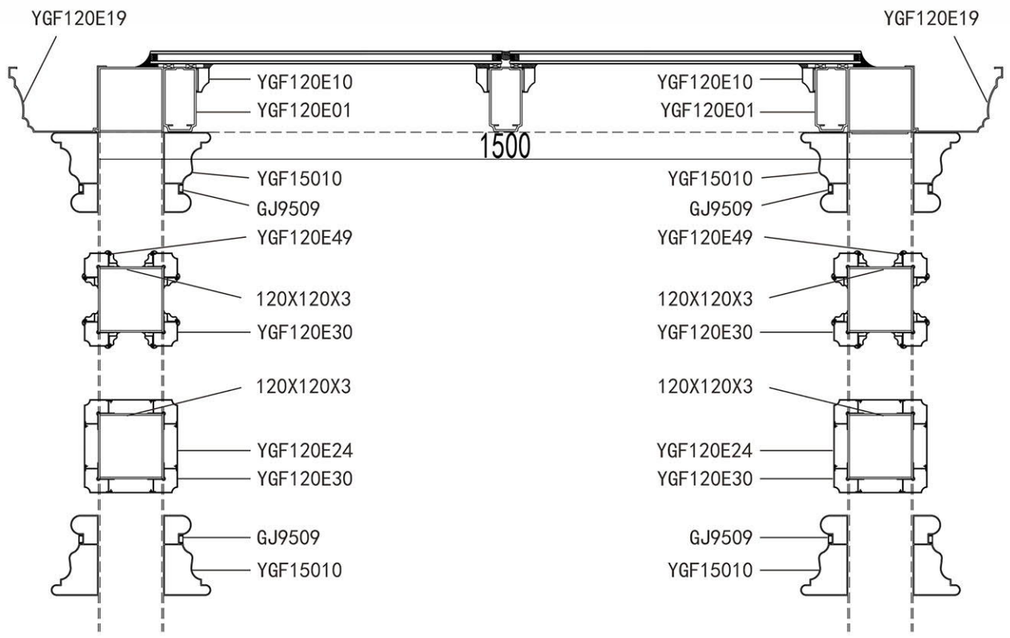


YGF120E系列阳光房截面图

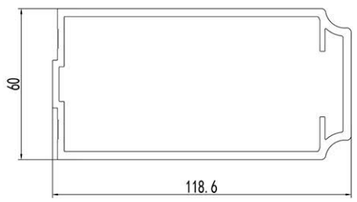




配 YGF120E06


型号	YGF120E01	名称	主梁	型号	YGF120E04	名称	盖板
壁厚(mm)	3.2	米重(kg/m)	2.931	壁厚(mm)	1.2	米重(kg/m)	0.244

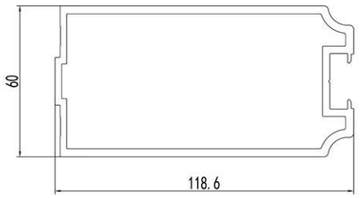




配 YGF120E39


型号	YGF120E11	名称	主梁	型号	YGF120E24	名称	盖板
壁厚(mm)	3.2	米重(kg/m)	2.969	壁厚(mm)	1.2	米重(kg/m)	0.322






配 YGF120E49
YGF120E24
150X150X2.5

型号	YGF120E03	名称	副梁	型号	YGF120E39	名称	装饰管
壁厚(mm)	2.0	米重(kg/m)	1.472	壁厚(mm)	1.4	米重(kg/m)	0.995

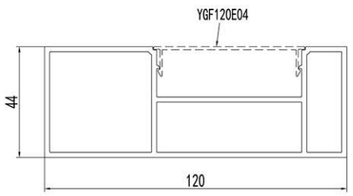


配 YGF120E04




配 YGF120E39

型号	YGF120E06	名称	靠墙料	型号	YGF120E49	名称	装饰条
壁厚(mm)	2.0	米重(kg/m)	2.170	壁厚(mm)	1.0	米重(kg/m)	0.266

YGF120E系列阳光房截面图




型号	YGF120E10	名称	耳饰
壁厚(mm)	1.0	米重(kg/m)	0.385




配 YGF120E24
120X120X3

型号	YGF120E30	名称	装饰管
壁厚(mm)	1.4	米重(kg/m)	0.767

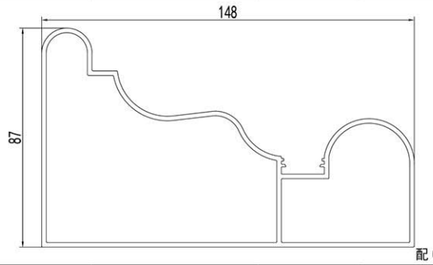


配 GJ9509

型号	YGF15010	名称	罗马柱
壁厚(mm)	1.8	米重(kg/m)	2.419




配 GJ9507

型号	GJ9509	名称	盖板
壁厚(mm)	0.8	米重(kg/m)	0.061




型号	YGF120E20	名称	下水管
壁厚(mm)	0.8	米重(kg/m)	0.545

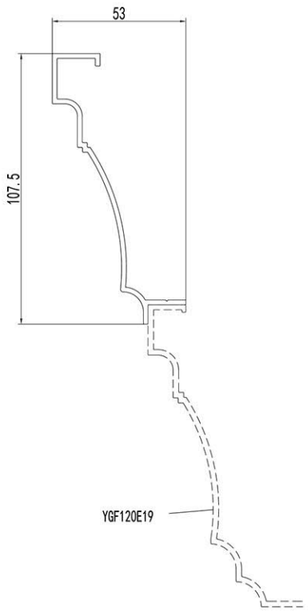

配 YGF120E19


型号	YGF120E59	名称	排水挡板
壁厚(mm)	1.9	米重(kg/m)	0.834

YGF120E系列阳光房截面图

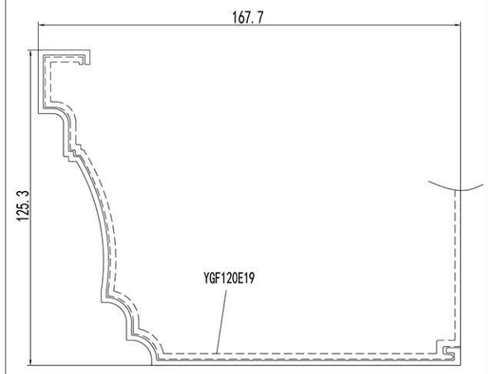

配 YGF120E19

型号	YGF120E09	名称	排水槽连接件
壁厚(mm)	2.0	米重(kg/m)	1.651

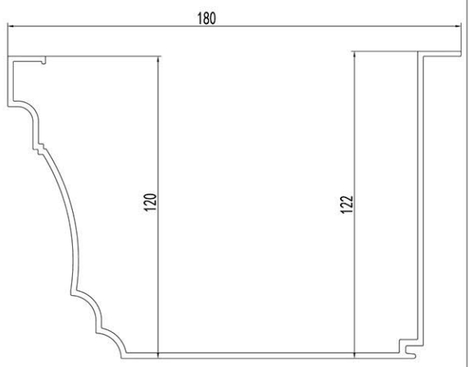

配 YGF120E09

型号	YGF120E19	名称	排水槽
壁厚(mm)	2.2	米重(kg/m)	2.457

YGF120E 系列阳光房截面图

（柱体组合方式）

